


Line 21 is a 38.8" linear profile in-grade uplight for outdoor installation. It is offered in 2 color temperatures, 4 optics options and a stainless steel finish.



TECHNICAL DATA

Wattage / Input	31.5W (120VAC)
Power Supply	Integral
Construction	Body: High Corrosion Resistance, Extruded Copper-Free Aluminum Trim: Stainless Steel AISI 304 Coating: Polyester Powder Coating with Phosphocromating Pre-Finish Cable Length: 3.28'
CCT	3000K, 4000K
CRI	-
Delivered Lumens	2873 lm (3000K, 30°)
Efficacy	91.3 lm/W
Optics	10°, 30°, 45°, Asymmetric Wall-Washer
Finishes	Stainless Steel
Fixture Dimensions	38.78" l x 4.49" w x 4.13" h
Fixture Weight	22.1 lbs
LED Source	21 CREE XP-G3 LED
Operating Temp.	-
IP Rating	IP67
Impact Rating	IK10

Fixture Dimensions

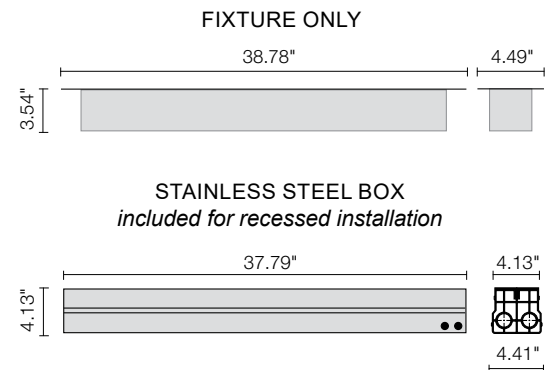

ORDERING INFORMATION

Example: 203004P-30K-45-SS.


203004P			SS
Model No.	CCT	Optics	Finish
203004P	30K - 3000K 40K - 4000K	10 - 10° 30 - 30° 45 - 45° WW - Asymmetrical Wall Washer	SS - Stainless Steel

Job Name/Date:

Fixture Type Designation:


PHOTOMETRIC DATA

Maximum Candela = 105296

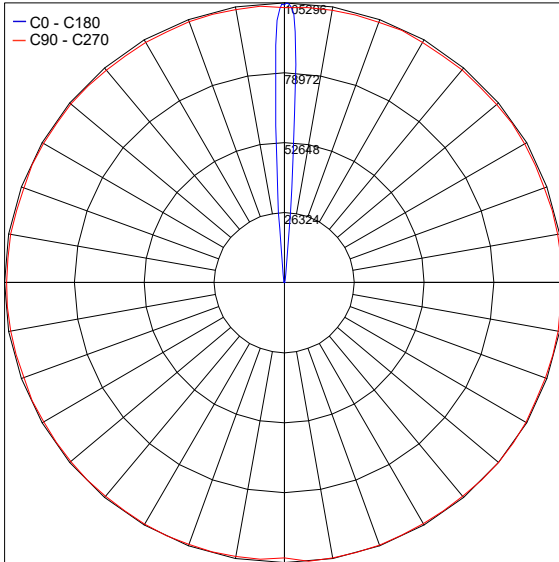


PHOTOMETRIC FILENAME : 203004_10.IES

Maximum Candela = 9600

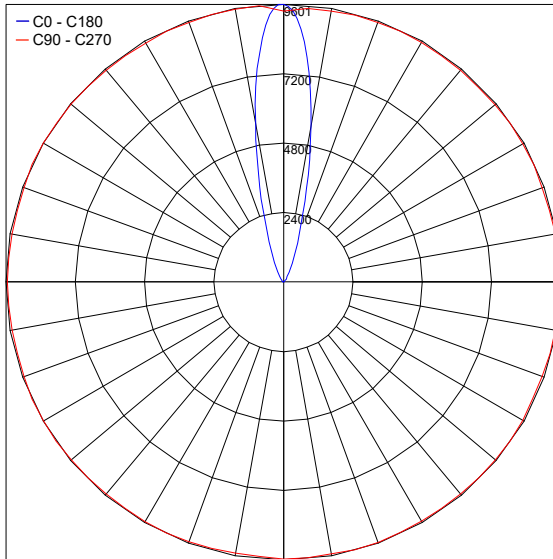

PHOTOMETRIC FILENAME : 203004_30.IES

Maximum Candela = 5734

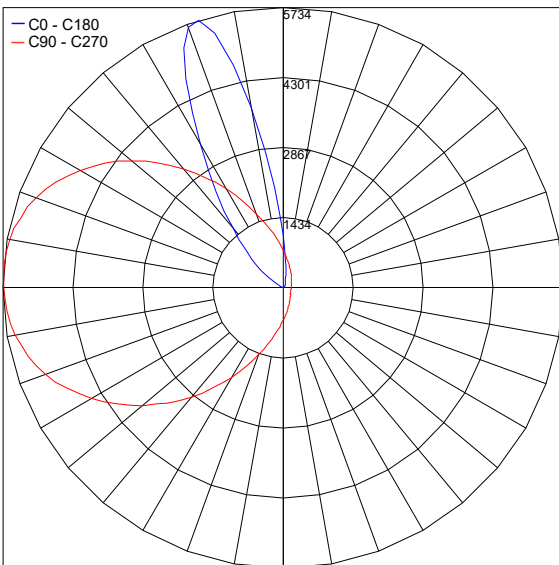

PHOTOMETRIC FILENAME : 203004_ASY.IES

Job Name/Date:

Fixture Type Designation: