

INVISIBILITY, MINIATURIZATION, ADJUSTABILITY

adjustable on the vertical axis and on the horizontal axis








Indoor Recessed



0.51 in

the miniaturized light hole emphasizes details ensuring greater precision and aesthetic quality

Orbit, the totally concealed downlight that combines invisibility, miniaturization and adjustable beam. The product features a 0.51" diameter light-emitting hole. The 24° lens, which can be swivelled horizontally and vertically, offers lighting designers the possibility of emphasizing details with precision.

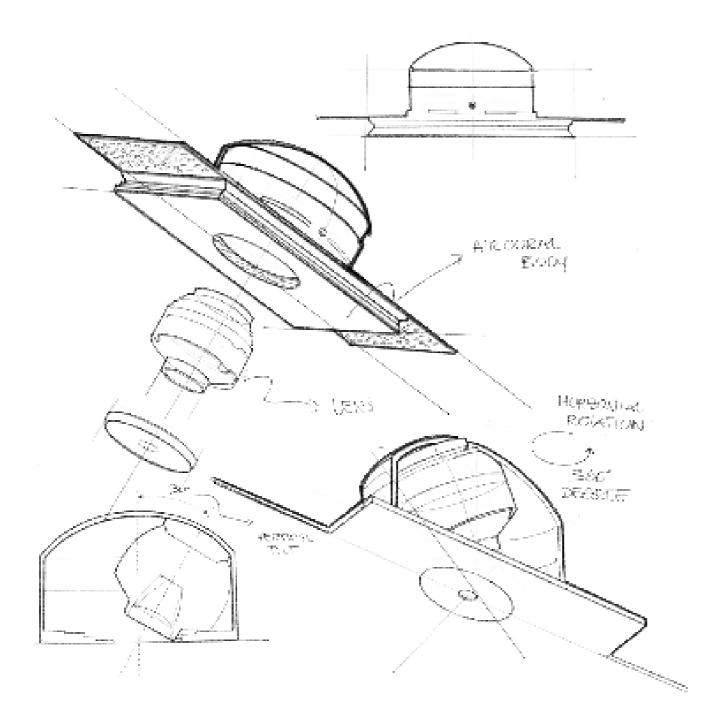





Indoor Recessed



Orbit

OTHER AVAILABLE CODES

U1017.AC 4 R 24 M _ WD	light color	
	27 30	2700K 3000K
	40	4000K (on request)

example of code composition

BU1017.AC 4 R 24 M 30 WD

TECHNICAL FEATURES Code


Code	BU1017.AC XX	
Туре	Tiltable downlight	
Material	AC: AirCoral®	
Absorption capacity*	29.27 ft ² (2.72 m ²)	
Weight	2.20 lbs	
Mounting	Ceiling recessed	
IP rating	IP40	
Control gear	Remote constant current electronic driver (not included)	
Cut out for plasterboard		
Lamp type	LED 500mA	
Lamp type	aTD Vf: 36 VDC	
Lamp wattage	1 × 9W	
Luminous efficacy	1 × 1125 lm - 3000K	
Light distribution	Wide beam 24°	
Fitting	-	
Light colour	White 3000K White 2700K 4000K (on request)	
Light hole	Ø 0.51 in	
Voltage connection	By driver (optional)	
CRI	>90	
0111	200	




79 Trenton Avenue Frenchtown, NJ 08825


www.designplan.com

Tel: (908) 996-7710 Fax: (908) 996-7042

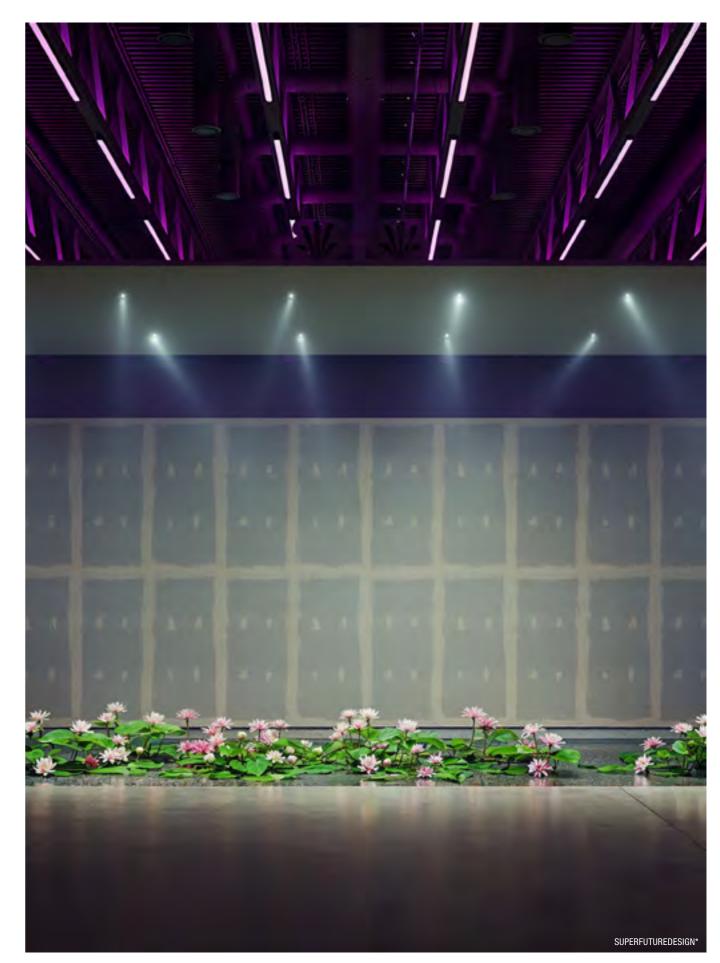

 * The absorption capacity per m³ calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²





Indoor Recessed