



UBICA New

P 30
C 30
W 30

designplan® 


79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

← UBICA P30, INOX NATURAL, 2700K




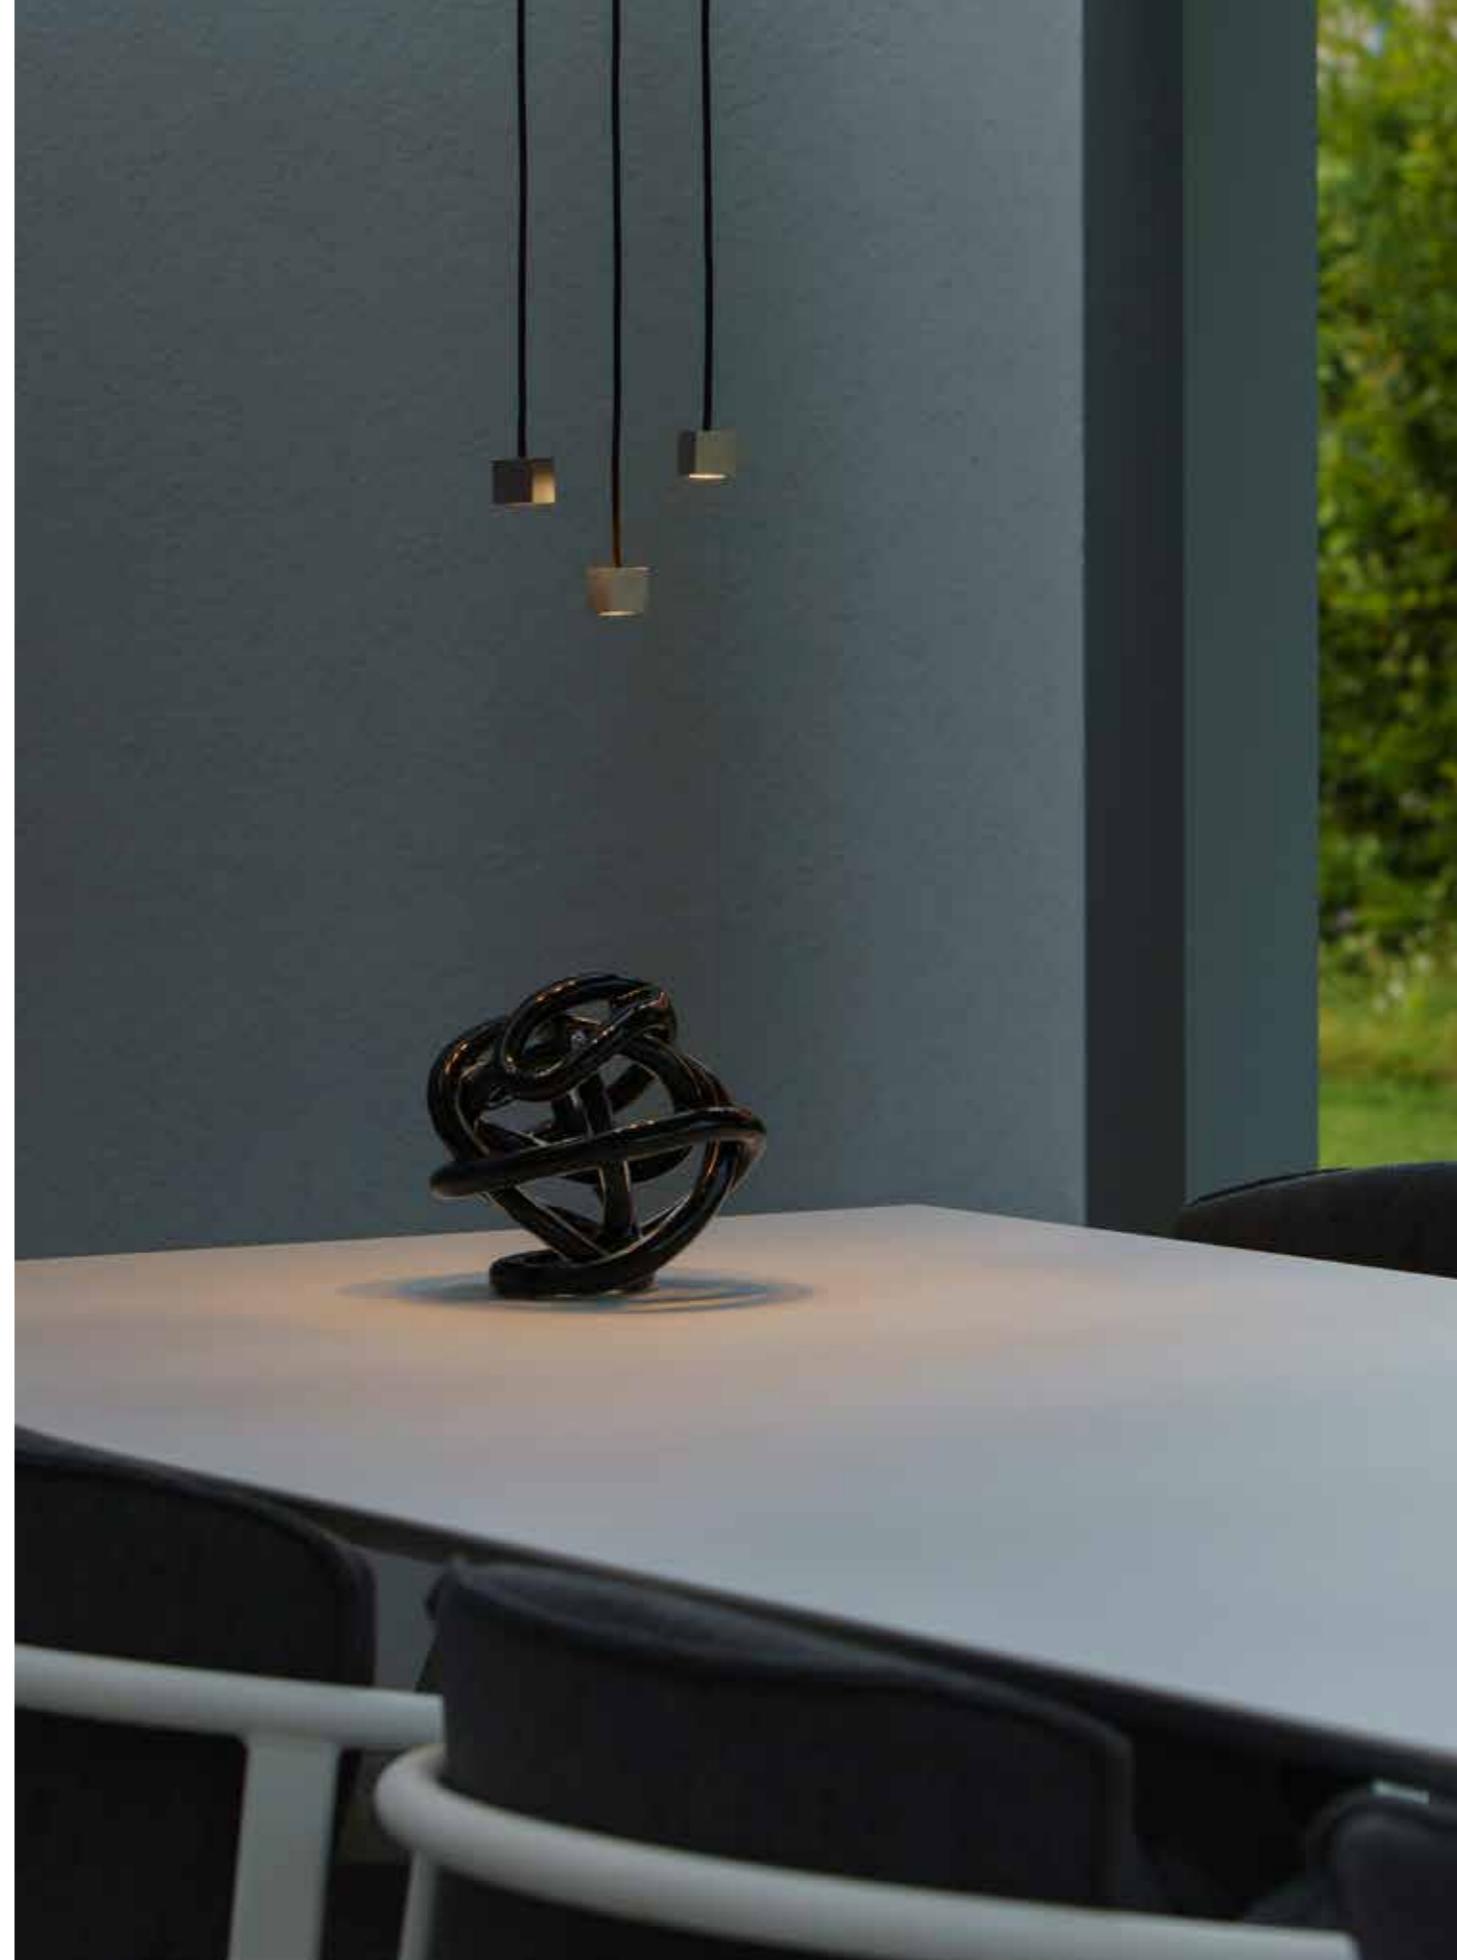

UBICA P30, INOX GRAPHITE ↑
UBICA P30, INOX NATURAL, 3000K →



↑ UBICA C30 AR, INOX NATURAL
← UBICA C30 AR, INOX GRAPHITE, 3000K

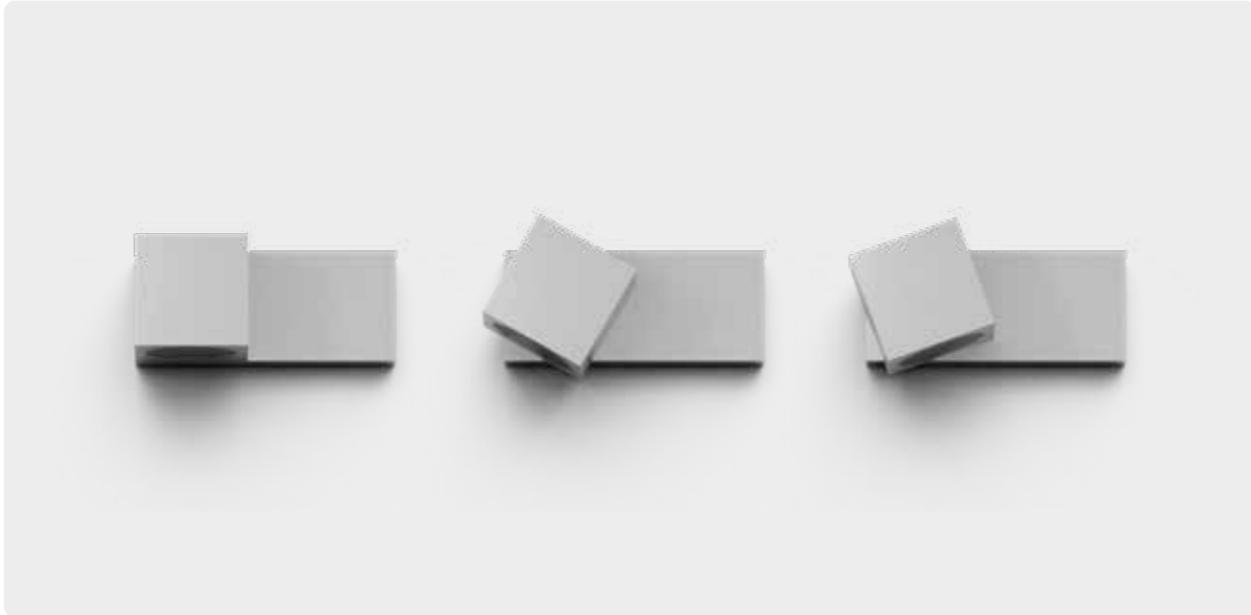

Swiveling on base plate installable horizontally and vertically



AISI 316L stainless steel rotating bracket




Suspension cable made of neoprene with adjustable length

AISI 316L stainless steel lighting fixture for wall, ceiling, suspension, or floor mounting installation. Provides diffuse illumination or blade of light for architectural accent solutions, with color temperatures of 2700K, 3000K, 4000K. Polycarbonate lenses. Installation on wall, ceiling, and floor through two different solutions: with bracket for surface mounting (or with plug for plasterboard, wood, and corrugated surfaces) provided as an accessory. Remote power supply. For the suspended version, IP66-rated multipole plug-in box available in thermoplastic material for powering up to 4 devices. Surface finish HCT available in three versions.

P



C




W



P30

Emission

Wide



1.18"



1.18"

Info	Temperature	2700 K (269 lm) / 3000 K (279 lm) / 4000 K (301 lm)
	Power	LED 3W
	Finish	● INOX Natural ● INOX Graphite ● INOX Bronze
	Characteristics	IK08, IP65, DALI
	Accessories	B1

Accessories B1



C30

Emission

Wide



1.18"

1.18"



1.18"

Info	Temperature	2700 K (269 lm) / 3000 K (279 lm) / 4000 K (301 lm)
	Power	LED 3W
	Finish	● INOX Natural ● INOX Graphite ● INOX Bronze
	Characteristics	IK08, IP66, DALI
	Accessories	Y1, X1

C30 AR

Emission

Blade



1.18

1.77"



1.18"

Info	Temperature	2700 K (269 lm) / 3000 K (279 lm) / 4000 K (301 lm)
	Power	LED 3W
	Finish	● INOX Natural ● INOX Graphite ● INOX Bronze
	Characteristics	IK08, IP67, DALI
	Accessories	Y1, X1



Accessories Y1 X1



Technical information

W30



Emission Wide



Info	Temperature	2700 K (269 lm) / 3000 K (279 lm) / 4000 K (301 lm)
	Power	LED 3W
	Finish	● INOX Natural ● INOX Graphite ● INOX Bronze
	Characteristics	IK08, IP68, DALI
	Accessories	Y1, X1

W30 FL

Emission Wide



Info	Temperature	2700 K (269 lm) / 3000 K (279 lm) / 4000 K (301 lm)
	Power	LED 3W
	Finish	● INOX Natural ● INOX Graphite ● INOX Bronze
	Characteristics	IK08, IP68, DALI
	Accessories	

Accessories Y1 X1

