

# TECHNICAL CATALOG 2024

designplan<sup>®</sup> 

**STRAL**

79 Trenton Avenue  
Frenchtown, NJ 08825

[www.designplan.com](http://www.designplan.com)

Tel: (908) 996-7710  
Fax: (908) 996-7042

# UBICA



Inox Natural



Inox Graphite




Inox Bronze

CRI>80



AISI 316L stainless steel lighting fixture for wall, ceiling, suspension, or floor mounting installation. Provides diffuse illumination or blade of light for architectural accent solutions, with color temperatures of 2700K, 3000K, 4000K. Polycarbonate lenses. Installation on wall, ceiling, and floor through two different solutions: with bracket for surface mounting (or with plug for plasterboard, wood, and corrugated surfaces) provided as an accessory. Remote power supply. For the suspended version, IP66-rated multipole plug-in box available in thermoplastic material for powering up to 4 devices. Surface finish HCT available in three versions.

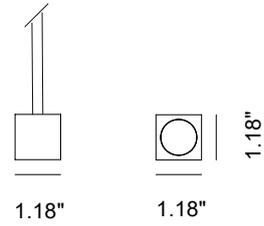


Emission




Diffusing

Color			
2700 K	3000 K	4000 K	
269 lm	279 lm	301 lm	
<hr/>			
Power			
3 W			



Accessories

IP65 IK08 lm



POWER BOX FOR  
4 DEVICES 4X3W  
PT41000



1.18"



1.18"

1.18"


Emission



Diffusing

Color			
2700 K	3000 K	4000 K	
269 lm	279 lm	301 lm	

Power  
3 W



Accessories

IP66 IK08 lm





WALL MOUNTING  
PLATE

PT70006




CORRUGATED  
PLUG - WOOD

PT70005





Emission



Architectural

Color	2700 K	3000 K	4000 K
	269 lm	279 lm	301 lm

Power  
3 W

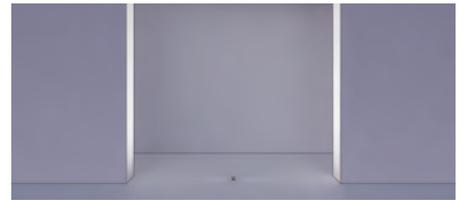

Accessories

IP67 IK08 lm



WALL MOUNTING  
PLATE  
PT70006



CORRUGATED  
PLUG - WOOD  
PT70005



1.18"



1.18"

1.18"


Emission



Diffusing

Color			
2700 K	3000 K	4000 K	
269 lm	279 lm	301 lm	

Power  
3 W



Accessories



IP68 IK08 lm




WALL MOUNTING  
PLATE  
PT70006



CORRUGATED  
PLUG - WOOD  
PT70005




Emission



Diffusing

Color			
2700 K	3000 K	4000 K	
269 lm	279 lm	301 lm	
<hr/>			
Power			
3 W			



Accessories

IP68 IK08 lm