

KL4 is an outdoor LED bollard, based off the Klee bollard, that is offered in 2 heights - 2-foot or 3-foot - 5 color temperatures, 3 optic options and 5 standard finishes. Dark Sky compliant for output below 80°.


TECHNICAL DATA

Wattage	30W
Power Supply	Integral 120-277VAC
Dimming	0-10V Dimming
Construction	Body: Aluminum Lens: Clear
CCT	2200K, 2700K, 3000K, 4000K RGBW (with Integral DMX decoder)
BUG Rating	Coming Soon
CRI	>80
Delivered Lumens	2142 lm (24°, 3000K) 2034 lm (36°, 3000K) 2349 lm (Asym, 3000K) Dark Sky compliant, output below 80°
Efficacy	71.4 lm/W (24°, 3000K) 67.8 lm/W (36°, 3000K) 78.3 lm/W (Asym, 3000K)
Optics	3 Options - See Below
Finishes	5 Standard, Custom RAL on request
Fixture Dimensions	Head: 4.0" w x 8.5" l Pole: 4.0" x 4.0" x 24.0" or 36.0" h
IP Rating	IP65



MADE IN THE U.S.A.

Fixture Dimensions

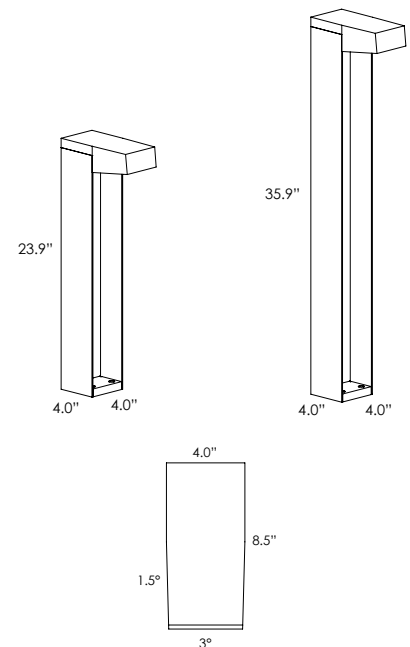


ORDERING INFORMATION

Example: KL4-L-2-40-02-18-C-0. Accessories ordered separately.

KL4-L	-		-		-		-	C	-	0
Model #	Height	CCT	Optics	Finish	Dimming	Options				
KL4-L	2 - 2 ft. 3 - 3 ft.	22 - 2200K 27 - 2700K 30 - 3000K 40 - 4000K RG - RGBW	01 - Type IV Short (PPDP00357) 02 - Type III Very Short (PPDP00358) 03 - Type III Very Short Asymmetric (PPDP00356)	11 - White Suede 02 - Black Suede 03 - Gray 18 - Tex. Bronze TS - Silver C - Custom	C - Integral 120-277VAC 0-10V Dimming (for static white only)	0 - None				

Job Name/Date:

Fixture Type Designation:

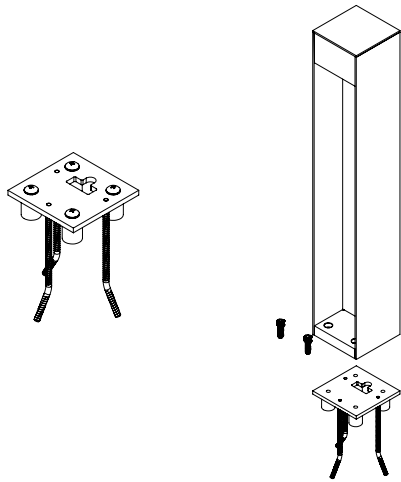ACCESSORIES - Installation

AM-00017
Mounting Base
Assembly

PHOTOMETRIC DATA

Coming Soon

Job Name/Date:

Fixture Type Designation: