MINNIE

datasheet


Minnie is a miniature, adjustable surface mounted luminaire that can be installed on ceilings or walls on in planters and gardens using ground spike. It is less than 1-inch in diameter, and available in 3 static white color temperatures and 2 standard finishes.




TECHNICAL DATA

Wattage	4W
Power Supply.	Remote 220mA, not included. See page 2
Construction	Body: Aluminum Lens: Glass
CCT	3000K
CRI	>90
BUG Rating	B1-U0-G0 (3000K)
Delivered Lumens	424 lm (3000K, 25°)
Efficacy	84.8 lm/W
Optics	25°, 50°
LED Source	BRIDGELUX GEN8 COB LED
Finishes	2 Standard Custom RAL on request
Fixture Dimensions	Ø0.91” x 2.48” h Base: Ø2.0”
IP Rating	IP67

Fixture Dimensions

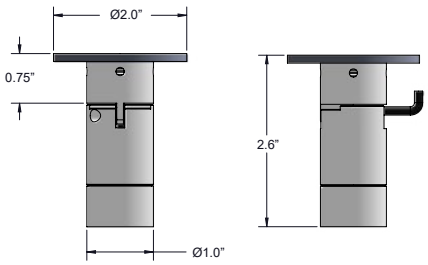



ORDERING INFORMATION

Example: MIN-L-30-02-25-H-R-0. Accessories / Power Supplies ordered separately.

MIN-L	-	30	-		-		-		-	R	-	0

Model #	CCT	Finish	Optics	Lens	Dimming / Driver	Options
MIN-L	**30** - 3000K	**11** - White Suede **02** - Black **C** - Custom	**25** - 25° **50** - 50°	**H** - Clear w/ Honeycomb **C** - Clear **L** - Linear	**R** - Remote Driver (Static White, Dim to Warm, RGBW)	**0** - None

Job Name/Date:

Fixture Type Designation:

sales@designplan.com
www.designplan.com

79 Trenton Avenue, Frenchtown NJ 08825
© Copyright 2025 Designplan Lighting, Inc.
Published: November 24, 2026
P: 908-996-7710
F: 908-996-7042

SUGGESTED POWER SUPPLIES

Static White - 220mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 220mA, 10W, Class 2, DAMP	1-2
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 220mA, 50W, Class 2, DAMP	1-3
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 220mA, 50W, Class 2, DAMP	1-3

For other power supply options consult factory.

ACCESSORIES

Installation



XXX
3-Prong Ground Spike
Consult Factory

Job Name/Date:

Fixture Type Designation:


sales@designplan.com
www.designplan.com

79 Trenton Avenue, Frenchtown NJ 08825
© Copyright 2025 Designplan Lighting, Inc.
Published: November 24, 2026
P: 908-996-7710
F: 908-996-7042

PHOTOMETRIC DATA


Note: Photometry is 3000K

Maximum Candela = 1166.1

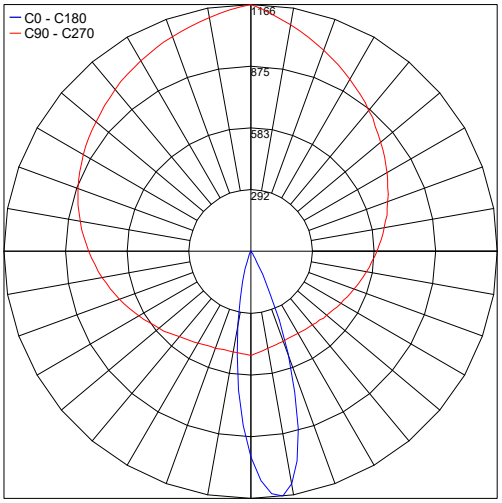


PHOTOMETRIC FILENAME : MINNIE-4W-3000K-24°-WITH HONEYCOMB.IES

Maximum Candela = 1481.0

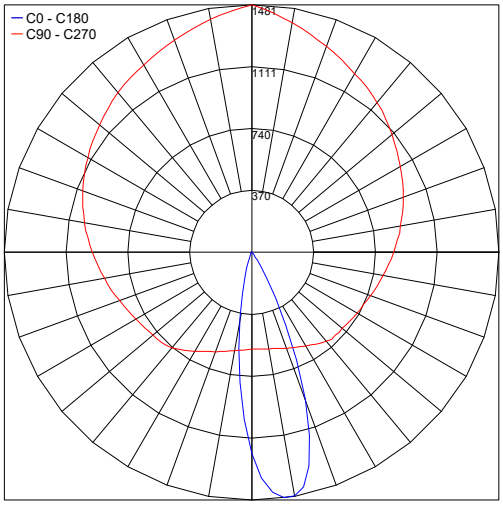


PHOTOMETRIC FILENAME : MINNIE-4W-3000K-24°-WITHOUT HONEYCOMB.IES

Maximum Candela = 642.9

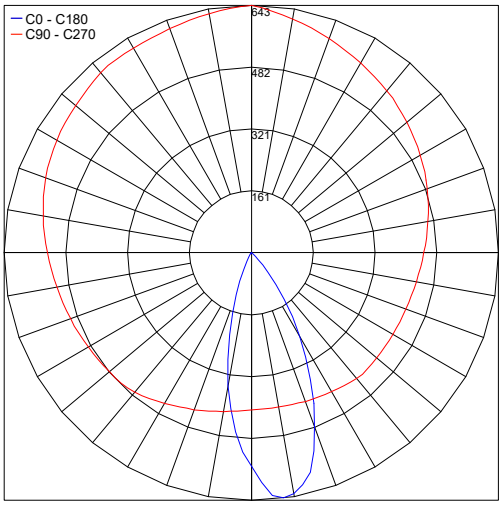

PHOTOMETRIC FILENAME : MINNIE-4W-3000K-50°-WITH HONEYCOMB.IES

Maximum Candela = 697.4

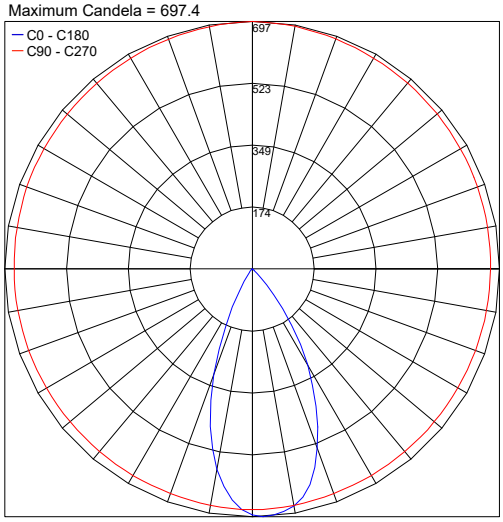

PHOTOMETRIC FILENAME : MINNIE-4W-3000K-50°-WITHOUT HONEYCOMB.IES

Job Name/Date:

Fixture Type Designation:

sales@designplan.com
www.designplan.com

79 Trenton Avenue, Frenchtown NJ 08825
© Copyright 2025 Designplan Lighting, Inc.
Published: November 24, 2026
P: 908-996-7710
F: 908-996-7042