



Minnie is a miniature, adjustable surface mounted luminaire that can be installed on ceilings or walls. It is less than 1-inch in diameter, and available in 3 static white color temperatures and 4 standard finishes.



## TECHNICAL DATA

|                           |                                        |
|---------------------------|----------------------------------------|
| <b>Wattage</b>            | 4W                                     |
| <b>Power Supply.</b>      | Remote 220mA, not included. See page 2 |
| <b>Construction</b>       | Body: Aluminum<br>Lens: Glass          |
| <b>CCT</b>                | 3000K                                  |
| <b>CRI</b>                | >90                                    |
| <b>Delivered Lumens</b>   | 424 lm (3000K, 25°)                    |
| <b>Efficacy</b>           | 84.8 lm/W                              |
| <b>Optics</b>             | 25°, 50°                               |
| <b>LED Source</b>         | BRIDGELUX GEN8 COB LED                 |
| <b>Finishes</b>           | 4 Standard, Custom RAL on request      |
| <b>Fixture Dimensions</b> | Ø0.91" x 2.48" h<br>Base: Ø2.0"        |
| <b>IP Rating</b>          | IP67                                   |

Fixture Dimensions

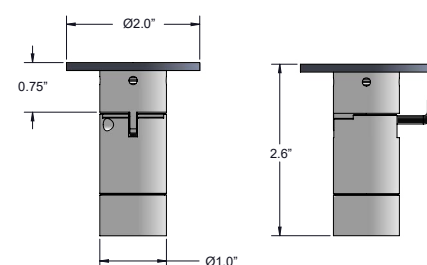

## ORDERING INFORMATION

Example: MIN-L-30-96-25-H-R-0. Power Supplies ordered separately.

| MIN-L   | -                                      |                                                                                                       | -                    |                                                      | -                                                             |          | - | R | - | 0 |
|---------|----------------------------------------|-------------------------------------------------------------------------------------------------------|----------------------|------------------------------------------------------|---------------------------------------------------------------|----------|---|---|---|---|
| Model # | CCT                                    | Finish                                                                                                | Optics               | Lens                                                 | Dimming / Driver                                              | Options  |   |   |   |   |
| MIN-L   | 27 - 2700K<br>30 - 3000K<br>40 - 4000K | 11 - White Suede<br>97 - Black Anodized<br>96 - Silver Anodized<br>PN - Polished Nickel<br>C - Custom | 25 - 25°<br>50 - 50° | H - Clear w/<br>Honeycomb<br>C - Clear<br>L - Linear | R - <u>Remote</u> Driver<br>(Static White, Dim to Warm, RGBW) | 0 - None |   |   |   |   |


Job Name/Date:

Fixture Type Designation:

**SUGGESTED POWER SUPPLIES**

Static White - 220mA

| Part Number                 | Description           | Input/Output                            | # of Fixtures |
|-----------------------------|-----------------------|-----------------------------------------|---------------|
| <a href="#">PPLT00466-P</a> | 0-10V Dimming to 1.0% | 120-277VAC to 220mA, 10W, Class 2, DAMP | 1-2           |
| <a href="#">PPLT00309-P</a> | 0-10V Dimming to 0.1% | 120-277VAC to 220mA, 50W, Class 2, DAMP | 1-3           |
| <a href="#">PPLT00467-P</a> | 0-10V Dimming to 1.0% | 120-277VAC to 220mA, 50W, Class 2, DAMP | 1-3           |

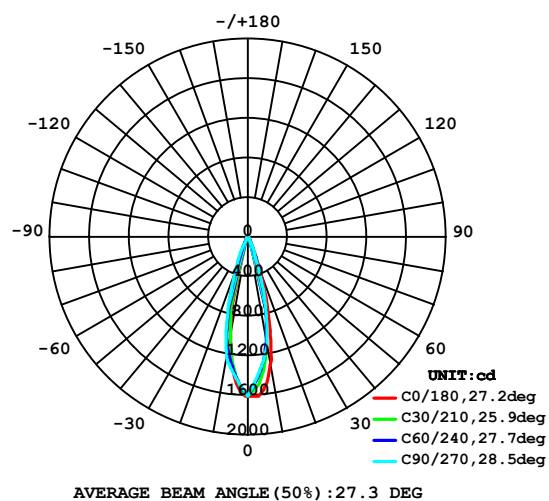*For other power supply options consult factory.***PHOTOMETRIC DATA***Note: Photometry is 3000K*

Job Name/Date:

Fixture Type Designation: