




Minnie is a miniature, adjustable surface mounted luminaire that can be installed on ceilings or walls. It is less than 1-inch in diameter, and available in 3 static white color temperatures and 4 standard finishes.

TECHNICAL DATA

Wattage	4W
Power Supply.	Remote 220mA, not included. See page 2
Construction	Body: Aluminum Lens: Glass
CCT	3000K
CRI	>90
Delivered Lumens	424 lm (3000K, 25°)
Efficacy	84.8 lm/W
Optics	25°, 50°
LED Source	BRIDGELUX GEN8 COB LED
Finishes	4 Standard, Custom RAL on request
Fixture Dimensions	Ø0.91" x 2.48" h Base: Ø2.0"
IP Rating	IP54



Fixture Dimensions

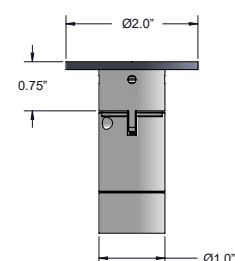

ORDERING INFORMATION

Example: MIN-L-30-96-25-R-0 . Power Supplies ordered separately.

MIN-L	-		-		-	R	-	0
Model #	CCT	Finish	Optics	Dimming	Options			
MIN-L	27 - 2700K 30 - 3000K 40 - 4000K	11 - White Suede 97 - Black Anodized 96 - Silver Anodized PN - Polished Nickel C - Custom	25 - 25° 50 - 50°	R - <u>Remote</u> Driver (Static White, Dim to Warm, RGBW)	0 - None			

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES


Static White - 220mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 220mA, 10W, Class 2, DAMP	1-2
PPLT00308-P	0-10V Dimming to 0.1%	120-277VAC to 220mA, 30W, Class 2, DAMP	1-3
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 220mA, 50W, Class 2, DAMP	1-3

For other power supply options consult factory.

PHOTOMETRIC DATA

Note: Photometry is 3000K

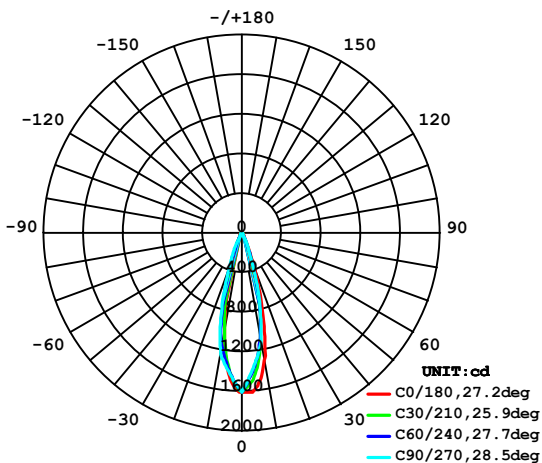

AVERAGE BEAM ANGLE (50%) : 27.3 DEG

Job Name/Date:

Fixture Type Designation: