

GINKO 2.5

designplan®

datasheet


Ginko is a family of small, versatile outdoor floodlights. Ginko 2.5 is an IP66-rated, high performance framing projector that has a diameter of 2.1" with light shaper and zoom optics. Available in 3 color temperatures and 4 standard finishes. Customized Gobo to project logos / words on request.

TECHNICAL DATA

Wattage / Input	7W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Anti-corrosive Aluminum Alloy Bracket: 316L Stainless Steel Lens: Serigraphed-gray & Tempered Extra-clear Glass Cable Length: 4.9' standard
CCT	2700K, 3000K, 4000K
CRI	>90
BUG Rating	B0-U0-G0 (3000K)
Delivered Lumens	86 lm (3000K, Light Shaper)
Efficacy	12.3 lm/W (3000K, Light Shaper)
Optics	Light Shaper, Light Shaper Zoom
Finishes	4 Standard, Custom RAL (see below) (4 Stage Marine Grade Finish)
Fixture Dimensions	Ø2.13" x 3.78" x 2.17" h (max 4.72" h fully extended), 0.98" wide bracket
Fixture Weight	1.26 lbs
LED Source	1 High Density COB LED
Lumen Maintenance	L95, B10 >50,000 hrs (Ta 25°C)
Color Consistency	2-Step MacAdam
Operating Temp.	-4°F to +113°F
IP Rating	IP66
Impact Rating	IK07



Fixture Dimensions

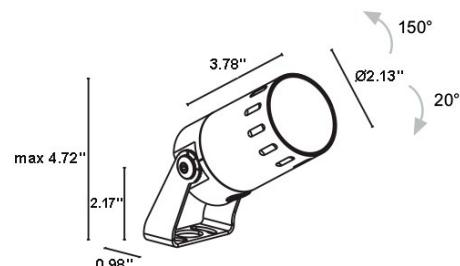

See page 2 for more drawings with optics

ORDERING INFORMATION


Example: GN25001000FR9T. Accessories / Power Supplies ordered separately.

GN2500	1000				
Model No.	CRI	CCT	Optics	Finish	Cable Length
GN2500	1000 - CRI 90	F - 2700K 5 - 3000K 9 - 4000K	R9 - Light Shaper Z9 - Light Shaper Zoom	E - White H - Anthracite T - Corten 5 - Jasper Green C - Custom RAL (consult factory for "C")	4.92' standard 2 - 32.81' 4 - 65.62'


Job Name/Date:

Fixture Type Designation:

Fixture Dimensions with Optics

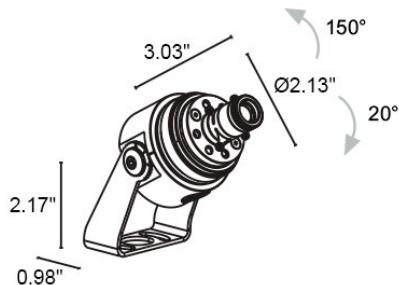

light shaper

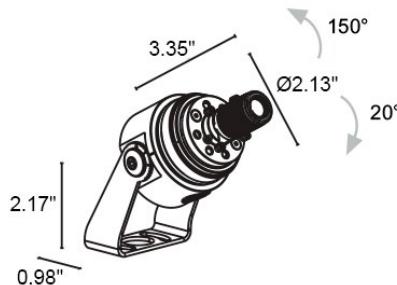

light shaper zoom

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description			Input/Output	# of Fixtures
PPLT00284	Non-Dim			120-277VAC to 24VDC, 100W, Class 2	1-11
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)			120-277VAC to 24VDC, 100W, Class 2	1-11

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3DAE / L3D0	L3DA/L3D0	100%-1%	Hi-Lume™ 0.1% EcoSystem™ or 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-10

DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description		Input/Output	# of Fixtures
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%		120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-10

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:

ACCESSORIES

Installation



WP0100

Ground Spike
(1.5" x 1.4" x 10.1" l)



WP1006 (Length 19.69")

WP1007 (Length 31.50")

Ground Spike with Bracket

Include one of the below finishes:

- E** - White
- H** - Anthracite
- T** - Cor-ten
- 5** - Jasper Green
- C** - Custom RAL

Snoots



WB8012

Standard Snoot

Include one of the below finishes:

- E** - White
- H** - Anthracite
- T** - Cor-ten
- 5** - Jasper Green
- C** - Custom RAL



WB8022

Asymmetrical Snoot

Include one of the below finishes:

- E** - White
- H** - Anthracite
- T** - Cor-ten
- 5** - Jasper Green
- C** - Custom RAL

Various Accessories






WP1004

Fastener Strap
(Length 16.4')

PHOTOMETRIC DATA

Note all Photometry is 3000K

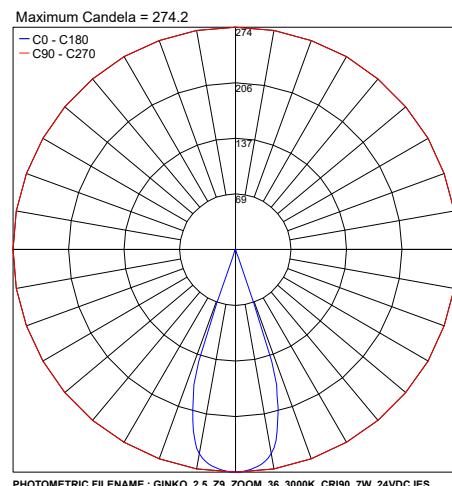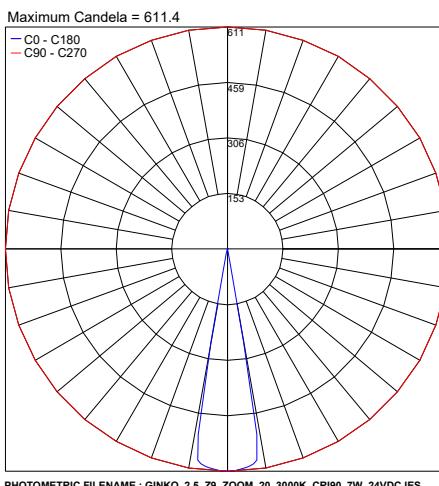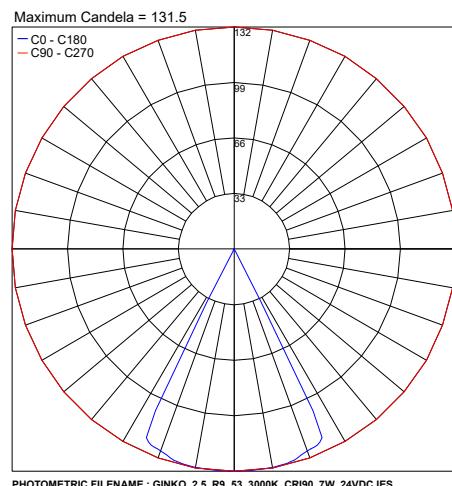

Job Name/Date:

Fixture Type Designation: