


Ginko is a family of small, versatile outdoor floodlights. Ginko 2.5 is an IP66-rated, high performance framing projector that has a diameter of 2.1" with light shaper and zoom optics. Available in 3 color temperatures and 4 standard finishes. Customized Gobo to project logos / words on request.

TECHNICAL DATA

Wattage / Input	7W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Anti-corrosive Aluminum Alloy Bracket: 316L Stainless Steel Lens: Serigraphed-gray & Tempered Extra-clear Glass Cable Length: 4.9' standard
CCT	2700K, 3000K, 4000K
CRI	>90
BUG Rating	B0-U0-G0 (3000K)
Delivered Lumens	86 lm (3000K, Light Shaper)
Efficacy	12.3 lm/W (3000K, Light Shaper)
Optics	Light Shaper, Light Shaper Zoom
Finishes	4 Standard, Custom RAL (see below) (4 Stage Marine Grade Finish)
Fixture Dimensions	Ø2.13" x 3.78" x 2.17" h (max 4.72" h fully extended), 0.98" wide bracket
Gobo Dimensions	Ø10.65 mm (Ø0.42")
Fixture Weight	1.26 lbs
LED Source	1 High Density COB LED
Lumen Maintenance	L95, B10 >50,000 hrs (Ta 25°C)
Color Consistency	2-Step MacAdam
Operating Temp.	-4°F to +113°F
IP Rating	IP66
Impact Rating	IK07



Fixture Dimensions

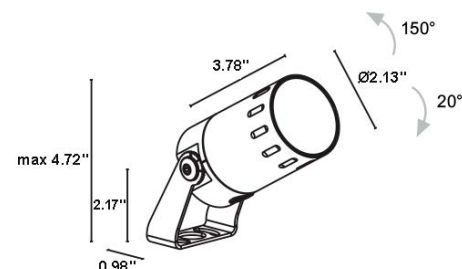

See page 2 for more drawings with optics

ORDERING INFORMATION


Example: GN25001000FR9T. Accessories / Power Supplies ordered separately.

GN2500	1000				-	
Model No.	CRI	CCT	Optics	Finish	Cable Length	
GN2500	1000 - CRI 90	F - 2700K 5 - 3000K 9 - 4000K	R9 - Light Shaper Z9 - Light Shaper Zoom	E - White H - Anthracite T - Corten 5 - Jasper Green C - Custom RAL (consult factory for "C")	4.92' standard 2 - 32.81' 4 - 65.62'	


Job Name/Date:

Fixture Type Designation:

FIXTURE DIMENSIONS with Optics

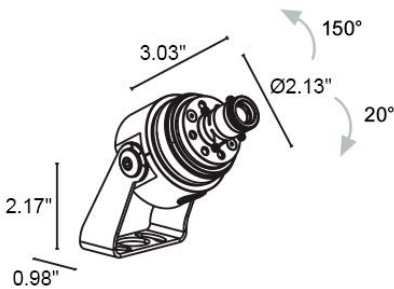

light shaper

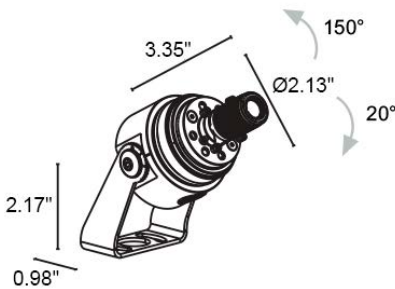

light shaper zoom

SUGGESTED POWER SUPPLIES
24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-11
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-11

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3DAE / L3D0	L3DA/L3D0	100%-1%	Hi-Lume™ 0.1% EcoSystem™ or 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-10

DRIVERS IN NEMA ENCLOSURE
Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description	Input/Output	# of Fixtures
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-10

For other power supply options consult factory.

Job Name/Date:


Fixture Type Designation:

ACCESSORIES

Installation



WP0100
Ground Spike
(1.5" x 1.4" x 10.1" l)



WP1006__ (Length 19.69")
WP1007__ (Length 31.50")
Ground Spike with Bracket
Include one of the below finishes:
E - White
H - Anthracite
T - Cor-ten
5 - Jasper Green
C - Custom RAL

Snoots



WB8012_
Standard Snoot
Include one of the below finishes:
E - White
H - Anthracite
T - Cor-ten
5 - Jasper Green
C - Custom RAL



WB8022_
Asymmetrical Snoot
Include one of the below finishes:
E - White
H - Anthracite
T - Cor-ten
5 - Jasper Green
C - Custom RAL


Various Accessories




WP1004
Fastener Strap
(Length 16.4')

PHOTOMETRIC DATA


Note all Photometry is 3000K

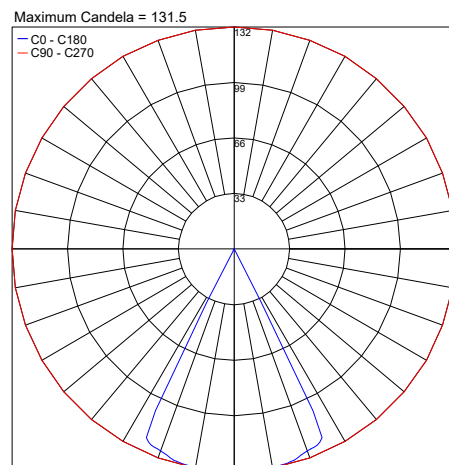

PHOTOMETRIC FILENAME : GINKO_2.5_R9_53_3000K_CRI90_7W_24VDC.IES

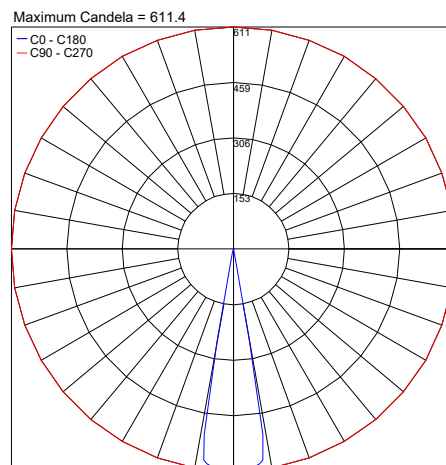

PHOTOMETRIC FILENAME : GINKO_2.5_Z9_ZOOM_20_3000K_CRI90_7W_24VDC.IES

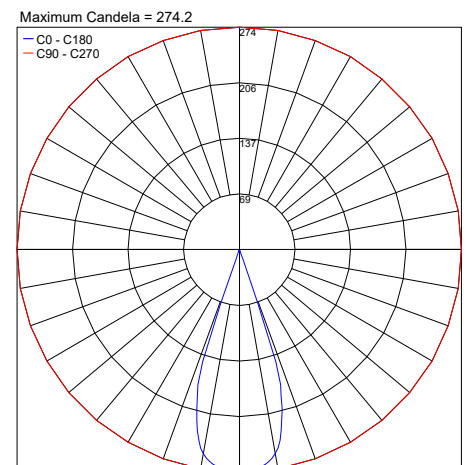

PHOTOMETRIC FILENAME : GINKO_2.5_Z9_ZOOM_36_3000K_CRI90_7W_24VDC.IES

Job Name/Date:

Fixture Type Designation: