



LED spotlight C1-nano-S

part number: A400455

description:

LED spotlight for installation in display cases,
360° rotatable, 150° swivelling,
with magnetic base or screw base

housing color:

aluminum anodized matte
in black, silver, gold, champagne, bronze
(other surface finishing on request)

optics:

15°, 18°, 26°, 30°, 45°, 80°, 47°+25°, 40°+10°

light colour (+/- 100K):

~2700K, ~3000K, ~3500K, ~4000K, ~5700K

high power LED, high CRI DIN EN 55015:2019,
lifetime 50,000 hours | basis of lifetime L80B10

protection class: IP20, protection class III, CE

luminous flux (~3000 K | 30° | 300mA):

~74lm at ~1W

power input:

300mA (constant current)

allowed LED driver:

Remote constant current driver
(other LED driver on request)


dimming:

external via potentiometer 0-10V,
Casambi, DALI, DMX connectable,
group dimming and individual dimming possible


optional accessories:

honeycomb grid,
anti-glare tube, slash cut tube,
light diffusion foil

C1-nano-S with magnetic base

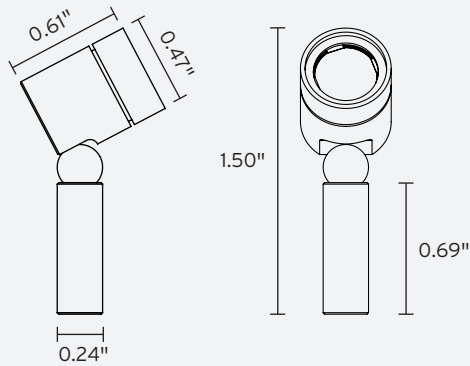



C1-nano-S with screw base

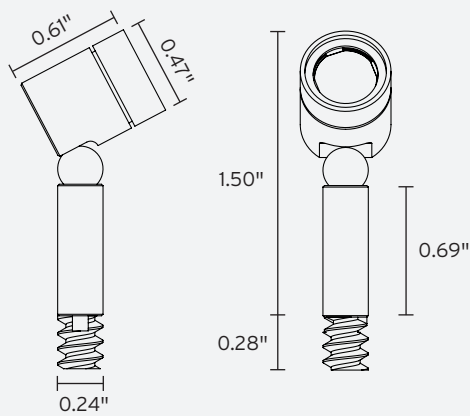

specification in in

photometry

light color ~3000K | standard lens 30° | CRI typ. 97, R9 > 90, R12 > 90 | color variation ≤ 3 SDCM | distance ~23.6"

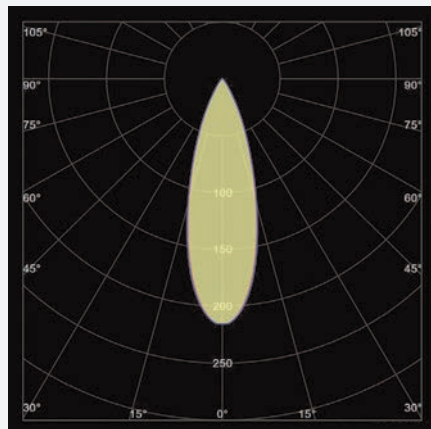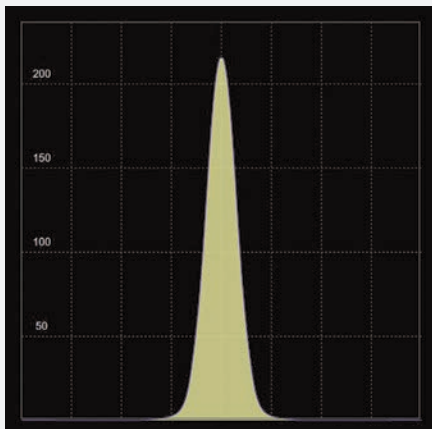

technical changes reserved | August 2025