



## LED spotlight C1-nano-VL

part number: A400455

### description:

LED spotlight for installation in display cases,  
360° rotatable, 150° swivelling,  
attachment with mounting flange

### housing color:

aluminum anodized matte  
in black, silver, gold, champagne, bronze  
(other surface finishing on request)

### optics:

15°, 18°, 26°, 30°, 45°, 80°, 47°+25°, 40°+10°

### light color (+/- 100K):

~2700K, ~3000K, ~3500K, ~4000K, ~5700K

high power LED, high CRI DIN EN 55015:2019,  
lifetime 50,000 hours | basis of lifetime L80B10

protection class: IP20, protection class III, CE

### luminous flux (~3000 K | 30° | 300mA):

~74 lm at ~1W

### power input:

300 mA (constant current)

### allowed LED driver:

Remote constant current driver  
(other LED driver on request)


### dimming:

external via potentiometer 0-10V,  
Casambi, DALI, DMX connectable,  
group dimming and individual dimming possible

### optional accessories:

honeycomb grid,  
anti-glare tube, slash cut tube,  
light diffusion foil

## dimensions

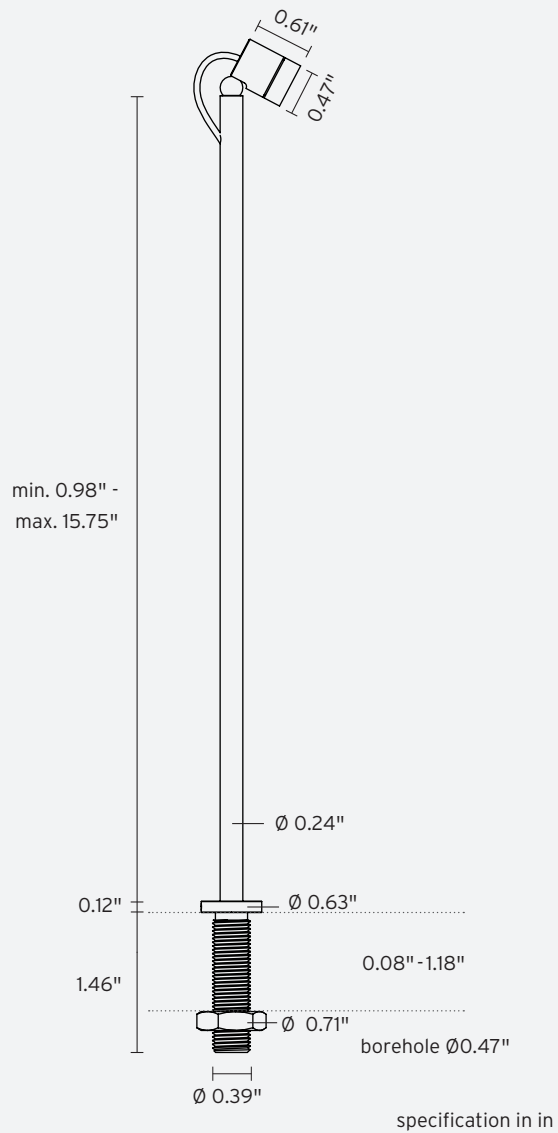

## photometry

light color ~3000K | standard lens 30° | CRI typ. 97, R9 > 90, R12 > 90 | color variation ≤ 3 SDCM | distance ~23.6"

