


FLEX TRACK LINE

Flex Track Line is a linear flexible LED strip suitable for installation in 48V tracks and compatible with different applications: ceiling, recessed, trimless or suspension. It is the perfect flexible solution for soft, ambient lighting in commercial or residential areas creating a homogeneous result. Available in lengths from 19.7" to 118.1". Customized lengths on request (up to 46 ft).

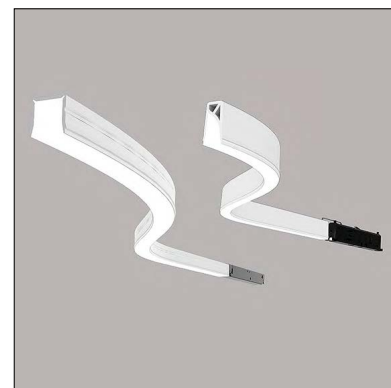

Fixture Dimensions - see page 2

TECHNICAL DATA

Wattage	8W or 16W per 3.28 ft (On/Off or Dimming) 12W per 3.28 ft (Tunable White or Dim to Warm)	
Power Supply	Integral - Drivers Built In Compatible with A.A.G. STUCCHI 48V tracks.	
Dimming	On/Off or Dimmable (Casambi or DALI only)	
Construction	Body: Polyurethane Resin Outer Casing: White PVC	
CCT	2700K, 3000K, 3500K, 4000K Tunable White: 2700K-6000K Dim to Warm: 1800K-3000K	
CRI	90	
Delivered Lumens	330 lm / 3.3' (8W, 3000K) 650 lm / 3.3' (16W, 3000K)	205 lm / 3.3' (Warm Wh.) 270 lm / 3.3' (Cool Wh.)
Efficacy	41.3 lm/W (8W, 3000K) 40.6 lm/W (16W, 3000K)	17.1 lm/W (Warm Wh.) 22.5 lm/W (Cool Wh.)
Optics	120°	
Fixture Dimensions	0.68" w x 0.63" h x Various (see below)	
Min. Bend Radius	11.8"	
Lumen Maintenance	L80, B10>50,000 hrs	
Color Consistency	2-3-Step MacAdam	
Operating Temp	-22°F to 131°F	
IP Rating	IP65, IP68	
Impact Resistance	IK08	

ORDERING INFORMATION

Example: Flex-LL720-N.24.68.H2.US.


	-		.	48	.		.		W	.	US
Model No.		CCT		Power		Dimming		Length		Finish	
Flex-LL9 - 8W / 3.3 ft		V2 - 2700K		48 - 48VDC		N - On/Off		05 - 19.69"		W - White	US
Flex-LL15 - 16W / 3.3 ft		V5 - 3000K				D - DALI		10 - 39.37"			
		V - 3500K				C - Casambi		20 - 78.74"			
		W - 4000K						30 - 118.11"			
Flex-LLTW8 - Tunable Wh. 2700K-6000K						D - DALI					
Flex-LLDW7 - DimWarm 1800K-3000K						C - Casambi					

Job Name/Date:


Fixture Type Designation:

FIXTURE DIMENSIONS

ON/OFF

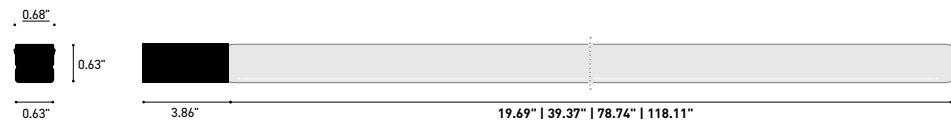

Dimmable

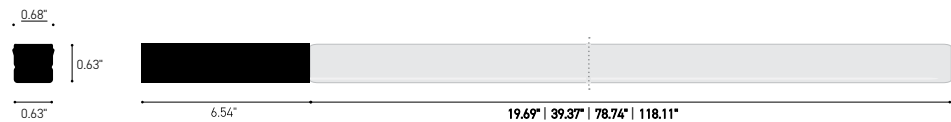

Job Name/Date:

Fixture Type Designation: