


GENIUS

1000 lm IN JUST 0.79 in DIAMETER,
EASY MAINTENANCE




Villa Bogogno Golf Resort, Novara | Negri Illuminazione | ph. Le Mich tte Creative Studio

LED replacement in
seconds
and without tools

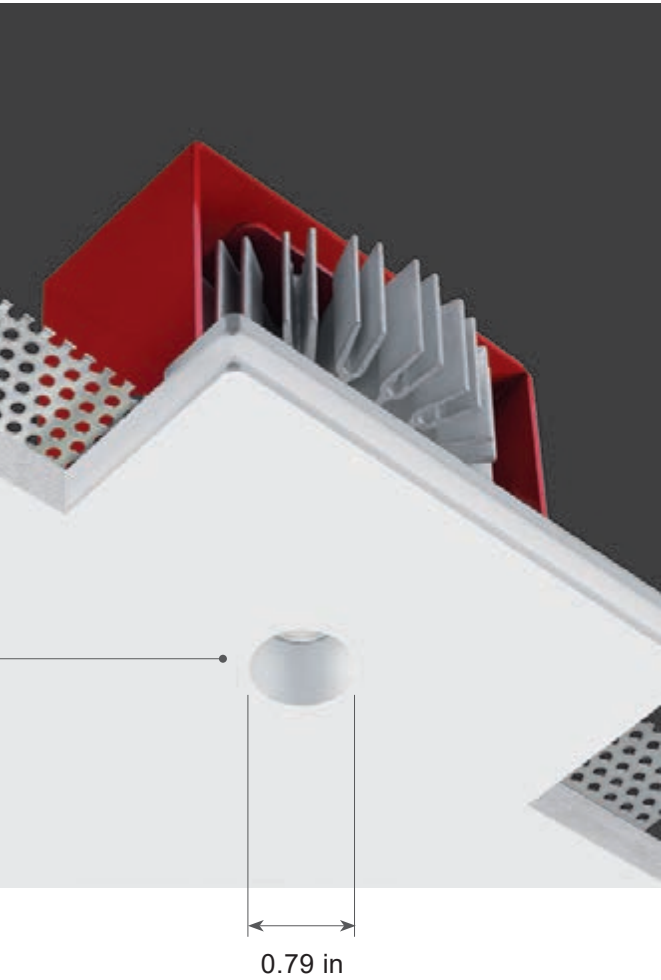


the only visible part is the emission hole of 20 mm (0.79")

PUSH & PULL TECHNOLOGY

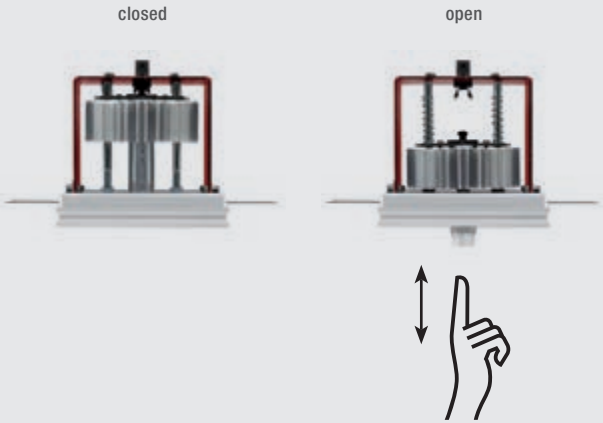

No need for an inspection hatch. The electrical part can be extracted straight from the light hole just with a simple manual gesture, thanks to the push-pull mechanism which makes it easy to extract and replace the LED source for maintenance purposes.

* The absorption capacity per ft³ calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft³

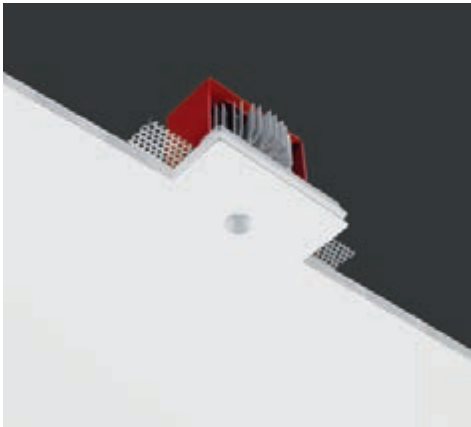

Genius




OTHER AVAILABLE CODES



BU1851.AC 4 24 M WD	<i>lens</i>	24°
	<i>light color</i>	
	27	2700K
	30	3000K
BU1851.27.AC	<i>lens</i>	40°
	<i>light color</i>	2700K
	<i>lens</i>	40°
	<i>light color</i>	4000K (on request)

example of code composition

BU1855.AC 4 R 24 M 30 WD



OPTIONAL
Honeycomb: anti-glare screen for proper light directionally.



TECHNICAL FEATURES

Code	BU1851.AC
Type	Downlight 90°
Material	AC: AirCoral®
Absorption capacity*	14.96 ft²
Weight	1.76 lbs
Mounting	Ceiling recessed
IP rating	IP65
Control gear	Remote constant current electronic driver (not included)
Cut out for plasterboard	5.31 × 4.33 in
Lamp type	LED 700mA
	⎓ Vf: 11.5 VDC
Lamp wattage	1 × 8.5W
Luminous efficacy	1 × 1000 lm - 3000K
Light distribution	Wide beam 40°
Fitting	-
Light color	White 3000K
Light hole	Ø 0.79 in
Voltage connection	By driver (optional)
CRI	>90
Note	Other available light colors: 2700K, 4000K (on request). Other available beams: 24°.

OPTIONAL

Brick box	cod. BR1851LT	cod. BR1855LT
Honeycomb screen	cod. ACC0053	cod. ACC0053

designplan®



GENIUS IP65
see page 395

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com


Tel: (908) 996-7710
Fax: (908) 996-7042



Alessandro Borghese - Il Lusso della Semplicità, Venice | Arch. A. Canelli | ph. Le Michette Creative Studio

* The absorption capacity per ft² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft²



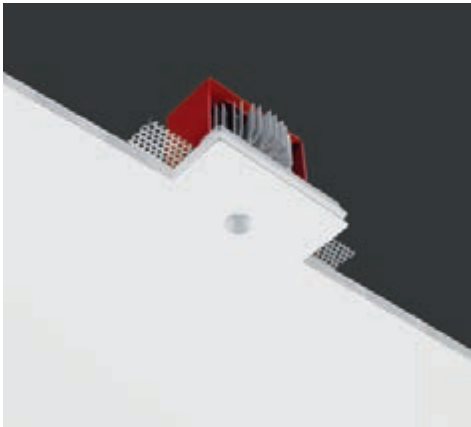

Genius Kelvin




OTHER AVAILABLE CODES

BU1874.AC 4 R _ M _ WD		
	<i>light color</i>	
22	2200K	
24	2400K	
35	3500K	
	<i>lens</i>	
24	24°	
40	40°	

example of code composition


BU1874.AC 4 R **24** M **35** WD

TECHNICAL FEATURES

Code	BU1874.AC
Type	Downlight 90°
	
Material	AC: AirCoral®
Absorption capacity*	14.96 ft²
Weight	1.76 lbs
Mounting	Ceiling recessed
IP rating	IP65
Control gear	Remote constant current electronic driver (not included)
Cut out for plasterboard	5.31 × 4.33 in
Lamp type	LED 350 mA Vi: 18 VDC
Lamp wattage	1 × 6W
Luminous efficacy	1 × 720 lm - 2200K 1 × 790 lm - 2400K 1 × 910 lm - 3500K
Light distribution	Wide beam 24° 40°
Fitting	-
Light color	White 2200K 2400K 3500K
Light hole	Ø 0.79 in
Voltage connection	By driver (optional)
CRI	>90

OPTIONAL

Brick box	cod. BR1855LT
-----------	---------------

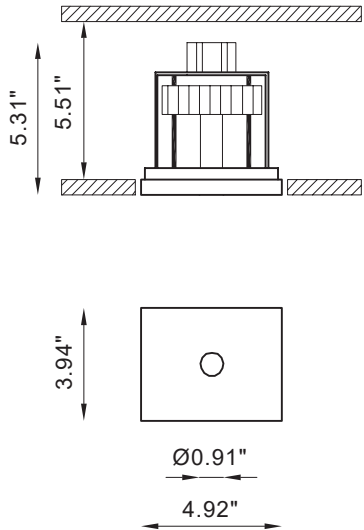

Villa Bogogno Golf Resort, Novara | Negri Illuminazione | ph. Le Michette Creative Studio




79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

* The absorption capacity per ft² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft²

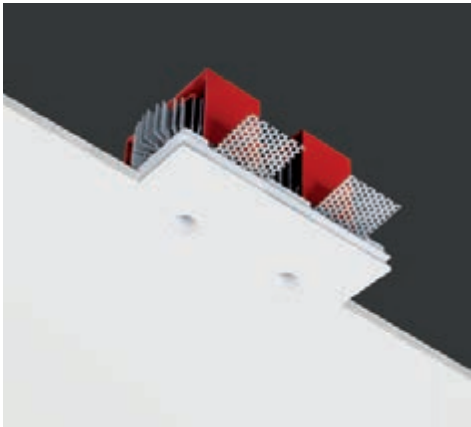

Twin Genius




OTHER AVAILABLE CODES


BU1852.AC 4 24 M _ WD	<i>lens</i>	24°
	<i>light color</i>	
	27	2700K
	30	3000K
BU1852.27.AC	<i>lens</i>	40°
	<i>light color</i>	2700K
	<i>lens</i>	40°
	<i>light color</i>	4000K (on request)

example of code composition

BU1857.AC 4 R 40 M 30 WD



OPTIONAL
Honeycomb: anti-glare screen
for proper light directionally.

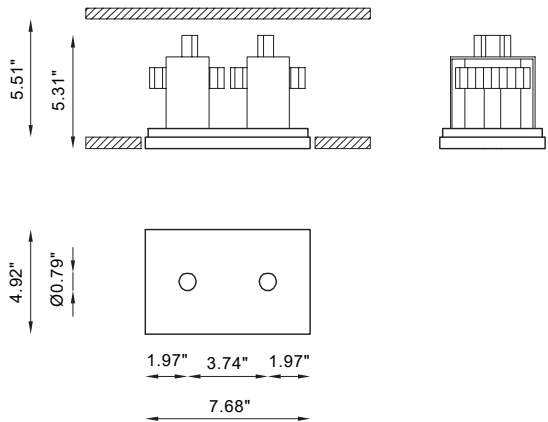

TECHNICAL FEATURES

Code	BU1852.AC
Type	Downlight 90°
Material	AC: AirCoral®
Absorption capacity*	29.92 ft²
Weight	4.41 lbs
Mounting	Ceiling recessed
IP rating	IP20
Control gear	Remote constant current electronic driver (not included)
Cut out for plasterboard	8.07 × 5.31 in
Lamp type	LED 700 mA
	⎓ Vf: 2 × 11.5 VDC
Lamp wattage	2 × 8.5W
Luminous efficacy	2 × 1000 lm - 3000K
Light distribution	Wide beam 40°
Fitting	-
Light color	White 3000K
Light hole	Ø 0.79 in
Voltage connection	By driver (optional)
CRI	>90
Note	Other available light colors: 2700K, 4000K (on request). Other available beams: 24°.

OPTIONAL

Brick box	cod. BR1852LT	cod. BR1857LT
Honeycomb screen	cod. ACC0053	cod. ACC0053

designplan®

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

SUPERFUTUREDESIGN®



DOUBLE LUMINOUS EFFICIENCY
AND EASY MAINTENANCE
INDEPENDENT PUSH-PULL MECHANISMS

* The absorption capacity per ft² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft²