

Reverso is a recessed downlight made of AirCoral® and inspired by the measured precision of Swiss watches. It has a silent and unobtrusive motorized mechanism with tilting case and total disappearance of light offering interchangeable lenses - narrow, medium and high beam – for optimal light customization.

TECHNICAL DATA

Wattage	6W
Power Supply	Remote 500mA, not included. See page 2.
Construction	Body: AirCoral®
CCT	2700K, 3000K, 4000K
CRI	>90
Total Lumens	800 lm (3000K)
Efficacy	133.3 lm/W
Optics	12°, 31°, 54°
Finishes	AirCoral® - Unfinished
Fixture Dimensions	9.84" l x 5.31" w x 3.15" h
Cut-Out Dimensions	10.63" x 5.51"
Aperture	Ø1.97"
Fixture Weight	3.31 lbs
IP Rating	IP20

The body is made of AirCoral® a unique patented composite material that actually purifies the air. It can be calculated how many cubic feet each fixture will purify. See website for AirCoral® calculator.

Additionally, AirCoral® is:

- Antibacterial.
- Antifungal.
- Scratch-resistant.
- Dust-resistant.
- Suitable for painting.
- LEED recognized material.


ORDERING INFORMATION

Example: BU1859.AC.US. Accessories / Power Supplies ordered separately.


BU1859	AC			ND.US
Model No.	Finish	Optic	CCT	
BU1859	AC - Air Coral®	12M - 12° 31M - 31° 54M - 54°	30 - 3000K (standard) 27 - 2700K 40 - 4000K	ND.US

Job Name/Date:

Fixture Type Designation:

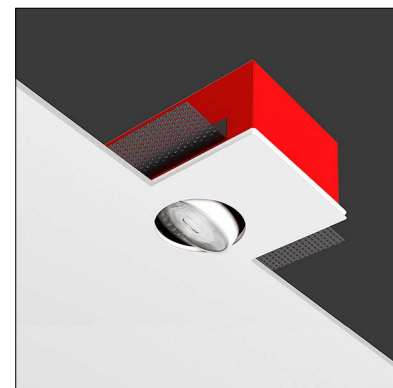

Fixture Dimensions

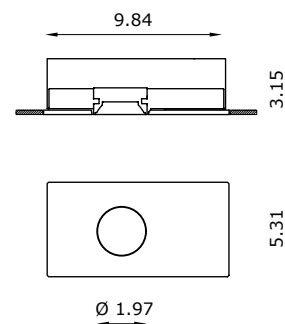

SUGGESTED POWER SUPPLIES

500mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00497	Phase Dim (120V only)	120VAC to 500mA, 12W, Class 2, DAMP	1-2
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 20W, Class 2, DAMP	1-3
PPLT00262	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 500mA, 32W, Class 2	2-3
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 500mA, 50W, Class 2, DAMP	1-4

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00195	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 19W, Class 2	2-3
PPLT00676	PEQ0E	PEQ0	100%-0.1%	Hi-Lume Premier 0.1% EcoSystem™ LED Driver F2B	120-277VAC to 500mA, 20W, Class 2	1-3

For other power supply options consult factory.

PHOTOMETRIC DATA

Coming Soon

Job Name/Date:

Fixture Type Designation: