


CILINDRO 2X SU BARRA

Cilindro 2X Su Barra is a wall mounted luminaire with 2 small adjustable cylinder downlights mounted on a rectangular base made of aluminum or brass. It offers 3W of power per beam in 3 color temperatures and 7 standard finishes.



Fixture dimensions

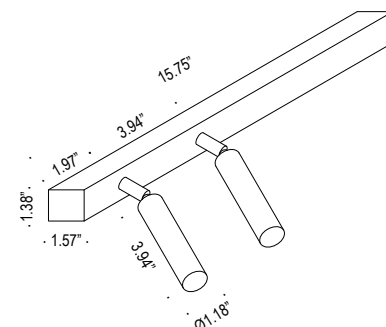

Uses Remote Driver
Does not require a J-Box

TECHNICAL DATA

Wattage / Input	3W per beam
Power Supply	Remote 350mA, not included. See page 2.
Light Source	Modulo LED
Construction	Body: Aluminum or Brass Canopy: Steel or Brass
CCT	2200K, 2700K, 3000K
CRI	80, 90
Delivered Lumens	235 lm per beam (2200K, CRI 90) 350 lm per beam (2700K, CRI 90) 375 lm per beam (3000K, CRI 90)
Efficacy	78.33 lm/W per beam (2200K) 116.66 lm/W per beam (2700K) 125 lm/W per beam (3000K)
Optics	15°-25°
Finishes	7 Standard Body, See Below 2 Standard Details, See Below
Fixture Dimensions	Head: Ø1.18" x 3.94" Canopy / Base: 15.75" l x 1.38" h x 1.57" w
IP Rating	IP20

ORDERING INFORMATION

Example: R70.092.2.ON.27.US. Power supplies ordered separately.

R70.092				US
Model No.	Body Finish	Detail Finish	CCT	
R70.092	1 - Matte White painted 2 - Matte Black Painted 4 - Burnished Painted 7 - Iron Painted ON - Natural Brass ONS - Brushed Brass ONB - Burnished Brass	ON - Natural Brass ONB - Burnished Brass	22 - 2200K 27 - 2700K 30 - 3000K	US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00496	Phase Dim (120V only)	120VAC to 350mA, 12W, Class 2, DAMP	1-3
PPLT00130	Non Dim	120-277VAC to 350mA, 3W	1-1
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 50W, Class 2	1-4

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00247	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 7W, Class 2	2-2

For other power supply options consult factory.

PHOTOMETRIC DATA

Coming Soon

Job Name/Date:

Fixture Type Designation: