


# COSMOPOLITAN ROUND


Cosmopolitan Round is a stylish, wall mounted luminaire that is flat and casts a soft inviting glow from behind as well as from the metal piece on the front. It comes in 2700K standard, and is crafted from premium materials with luxurious finishes making it the perfect choice for hotels, restaurants and residential spaces.

## TECHNICAL DATA

|                           |                                       |
|---------------------------|---------------------------------------|
| <b>Wattage / Input</b>    | 6W (24VDC)                            |
| <b>Power Supply</b>       | Remote, not included. See page 2.     |
| <b>Construction</b>       | Lens: Frosted                         |
| <b>CCT</b>                | 2700K                                 |
| <b>CRI</b>                | 90                                    |
| <b>Delivered Lumens</b>   | 429 lm                                |
| <b>Efficacy</b>           | 71.5 lm/W                             |
| <b>Optics</b>             | 180°                                  |
| <b>Finishes</b>           | 5 standard, see below                 |
| <b>LED Source</b>         | LP COB LEDSTRING 2700K                |
| <b>Lumen Maintenance</b>  | 50,000 hrs (Ta 25°C)                  |
| <b>Fixture Dimensions</b> | Ø9.33" x 0.39"<br>Strip: 1.18"x 9.33" |
| <b>Fixture Weight</b>     | 3.53 lbs                              |
| <b>IP Rating</b>          | IP20                                  |

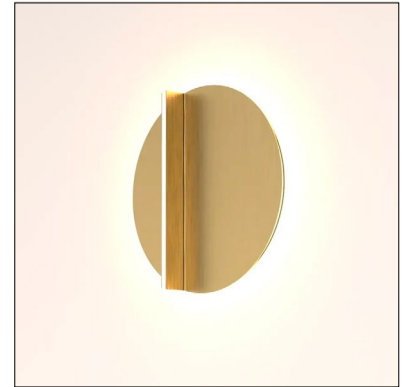

Fixture Dimensions

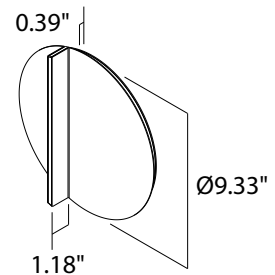

## ORDERING INFORMATION

*Example: T124026. Power Supplies ordered separately.*

|                  |                                                                                                                                               |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| <b>T1240</b>     |                                                                                                                                               |
| <b>Model No.</b> | <b>Finishes</b>                                                                                                                               |
| <b>T1240</b>     | <b>17</b> - Bronze Antique<br><b>06</b> - Brushed Brass<br><b>29</b> - Red Copper<br><b>26</b> - Textured Black<br><b>47</b> - Textured White |

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC

| Part Number               | Description                                             | Input/Output                       | # of Fixtures |
|---------------------------|---------------------------------------------------------|------------------------------------|---------------|
| <a href="#">PPLT00586</a> | Non-Dim                                                 | 120-277VAC to 24VDC, 40W, Class 2  | 1-5           |
| <a href="#">PPLT00543</a> | 0-10V Dimming to 15% (-40°C / -40°F cold weather start) | 120-277VAC to 24VDC, 100W, Class 2 | 1-13          |

## DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

| Part Number               | Description                         | Input/Output                                | # of Fixtures |
|---------------------------|-------------------------------------|---------------------------------------------|---------------|
| <a href="#">PPLT00715</a> | ELV / TRIAC / 0-10V Dimming to 0.1% | 120-277VAC to 24VDC, 96W, Class 2, WET/DAMP | 1-12          |

For other power supply options consult factory.

## PHOTOMETRIC DATA

Note: Photometry is 2700K - Coming Soon

Job Name/Date:

Fixture Type Designation: