


Punto Di Vista Su Rettangolo is an adjustable cylindrical wall lamp made of aluminum and brass with a steel or brass canopy. It is suitable for indoor installation, and is available in 7 standard body finishes and 3 detail finishes.



TECHNICAL DATA

Wattage / Input	3W (350mA)
Power Supply	Remote, not included. See page 2.
Light Source	COB LED
Construction	Body: Aluminum or Brass Canopy: Steel or Brass
CCT	2200K, 2700K, 3000K
CRI	80, 90
Delivered Lumens	235 lm (2200K, 90CRI) 350 lm (2700K, 90CRI) 375 lm (3000K, 90CRI)
Efficacy	78.3 lm/W (2200K) 116.7 lm/W (2700K) 125 lm/W (3000K)
Optics	15°-25°
Finishes	7 Standard Body Finishes, See Below 2 Standard Detail Finishes, See Below
Fixture Dimensions	Body: Ø1.18" x 3.94" h Base: 7.09" l x 2.17" h
IP Rating	IP20

Fixture dimensions

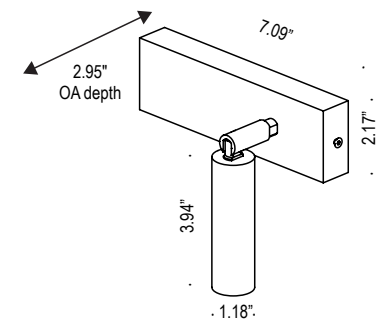

Uses Remote Driver
Does not require a J-Box

ORDERING INFORMATION

Example: R70.094.2.ON.30.US. Power Supplies ordered separately.

R70.094				US
Model No.	Body Finish	Detail Finish	CCT	
R70.094	1 - Matte White Painted 2 - Matte Black Painted 4 - Burnished Painted 7 - Iron Painted ON - Natural Brass ONS - Brushed Brass ONB - Burnished Brass	ON - Natural Brass ONB - Burnished Brass	27 - 2700K 30 - 3000K	US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00496	Phase Dim (120V only)	120VAC to 350mA, 12W, Class 2, DAMP	1-2
PPLT00211	Non Dim	120-277VAC to 350mA, 10W, Class 2	2-2
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 50W, Class 2	1-4

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	3-3

For other power supply options consult factory.

PHOTOMETRIC DATA

*Coming Soon**Job Name/Date:**Fixture Type Designation:*