


The Spot 5.4 is a surface mounted, outdoor rated, high power floodlight. It is available in white light with 6 optic options and 2 standard finishes. Not suitable for swimming pools or fountains.



TECHNICAL DATA

Wattage	52W
Power Supply	Integral 120VAC
Dimming	On/Off
Construction	Body: Anticorodal Aluminum Bracket: Aluminum Lens: Serigraphed-Gray & Transparent, Tempered Extra-Clear Glass Cable Length: 4.9' standard
CCT	2700K, 3000K, 4000K
CRI	80
BUG Rating	B3-U0-G0 (3000K)
Delivered Lumens	5025 lm (3000K, 34°)
Efficacy	96.6 lm/W (3000K, 34°)
Optics	6 Standard (see below)
Finishes	3 Standard, Custom RAL on request (4 Stage Marine Grade Finish)
Fixture Dimensions	Ø5.87" x 10.31" l x 8.39" h
Fixture Weight	13.23 lbs
LED Source	1 COB LED
Lumen Maintenance	L80, B10 >100,000hrs (Ta 25°C)
Color Consistency	2-Step MacAdam
Operating Temp.	-4°F to +113°F
IP Rating	IP66
IK Rating	IK10

Fixture Dimensions

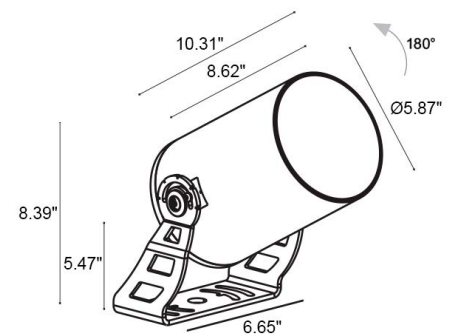

ORDERING INFORMATION

Example: CF5410000090ME. Accessories ordered separately.

CF54100000			
Model No.	CCT	Optics	Finish
CF54100000	F - 2700K 5 - 3000K 9 - 4000K	0S - 15° 0M - 25° 0L - 34° 0J - 53° 0W - 14°x65°adj. 0X - 22°x66° adl.	H - Anthracite 5 - Jasper Green E - White C - Custom RAL (consult factory for "C")

Job Name/Date:

Fixture Type Designation:


ACCESSORIES

Installation



WP0300

Ground Spike (15.6")



WPA12_


Flange for Pole Installation - 2.36"

Include one of the below finishes:

5 - Jasper Green

E - White

H - Anthracite

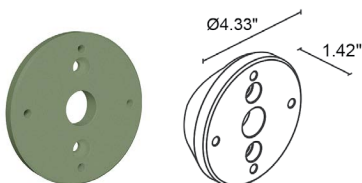

WPA13_

Flange for Pole Installation - 3.50"


Include one of the below finishes:

5 - Jasper Green

E - White

H - Anthracite

Anti-Glare

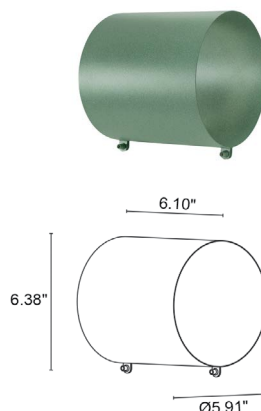

WBA22_


Standard Snoot

For Snoots include one of the below finishes:

5 - Jasper Green

E - White

H - Anthracite

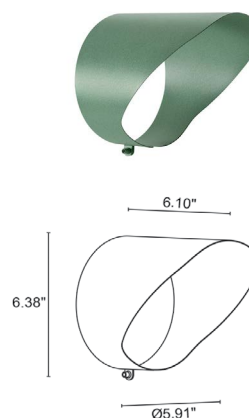

WBA23_

Asymmetrical Snoot

For Snoots include one of the below finishes:

5 - Jasper Green

E - White

H - Anthracite

Optical



WE0201

Magnet for adjustable optics and zoom lens


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA


Note all photometry in 3000K

Maximum Candela = 53497.5

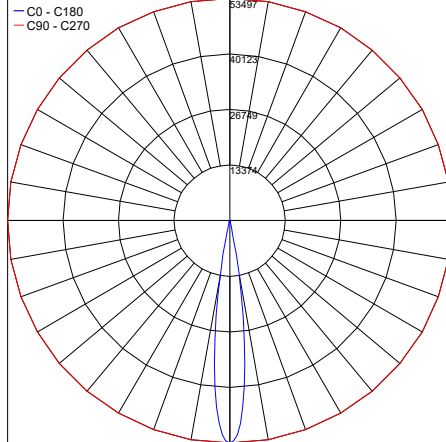


PHOTOMETRIC FILENAME : SPOT_5.4_S_15_3000K_52W.IES

Maximum Candela = 21285.4

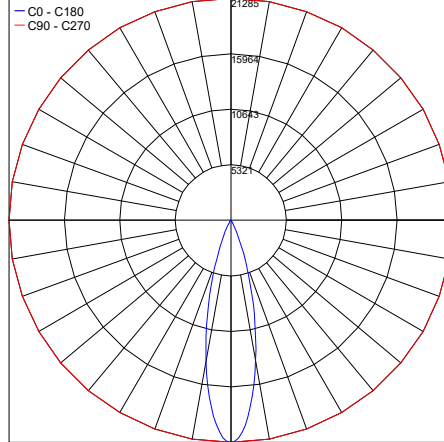


PHOTOMETRIC FILENAME : SPOT_5.4_M_25_3000K_52W.IES

Maximum Candela = 14289.2

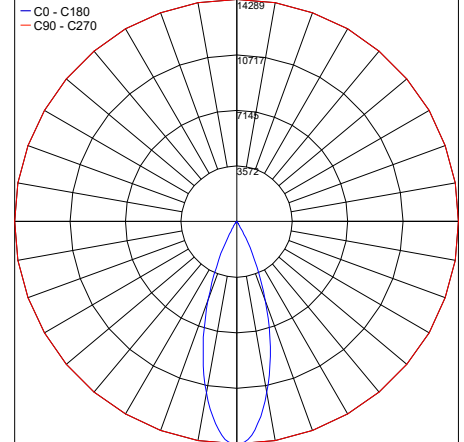


PHOTOMETRIC FILENAME : SPOT_5.4_L_34_3000K_52W.IES

Maximum Candela = 5819.4

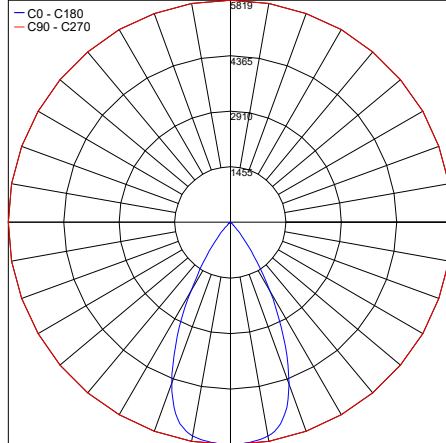


PHOTOMETRIC FILENAME : SPOT_5.4_I_53_3000K_52W.IES

Maximum Candela = 12595.0

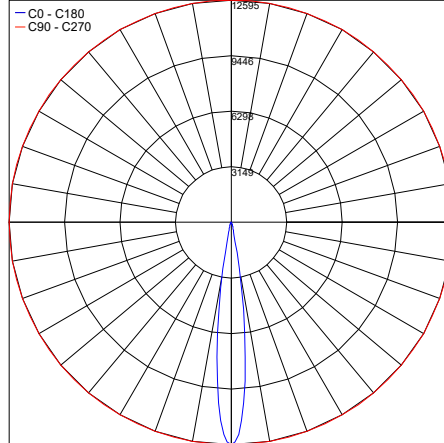

PHOTOMETRIC FILENAME : SPOT_5.4_W_14X65_3000K_52W.IES

Maximum Candela = 10700.2

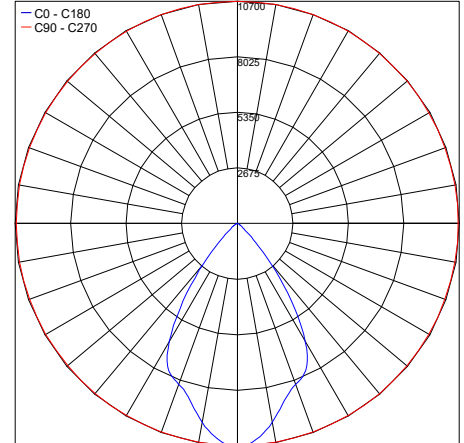

PHOTOMETRIC FILENAME : SPOT_5.4_X_22X66_3000K_52W.IES

Job Name/Date:

Fixture Type Designation: