

MENSOLA COMODINO


Mensola Comodino is a wall mounted luminaire with a small aluminum adjustable cylinder head. It is available in 3 standard color temperatures, 4 standard body finishes and 2 detail finishes.



TECHNICAL DATA

Wattage	3W
Power Supply	Remote 350mA, not included. See page 2.
Light Source	Modulo LED
Construction	Body: Steel, Aluminum
CCT	2200K, 2700K, 3000K
CRI	>80, >90
Delivered Lumens	300 lm (2200K, >80) 450 lm (2700K, >80) 470 lm (3000K, >80)
Efficacy	100 lm/W (2200K, >80) 150 lm/W (2700K, >80) 156.7 lm/W (3000K, >80)
Optics	15°-25°
Finishes	4 Standard Body, See Below 2 Standard Details, See Below
Fixture Dimensions	5.91" x 3.94" x 11.81" h Head: Ø1.18" x 3.94"
IP Rating	IP20

Fixture dimensions

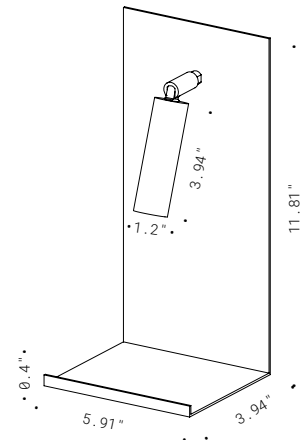

ORDERING INFORMATION

Example: R70.095.7.ONB.27.US. Power supplies ordered separately.

R70.095				US
Model No.	Body Finish	Detail Finish	CCT	
R70.095	7 - Iron Painted 4 - Burnished Painted 1 - Matte White Painted 2 - Matte Black Painting	ON - Natural Brass ONB - Burnished Brass	22 - 2200K 27 - 2700K 30 - 3000K	US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00496	Phase Dim (120V only)	120VAC to 350mA, 12W, Class 2, DAMP	1-2
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 20W, Class 2, DAMP	1-4
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 50W, Class 2, DAMP	1-4

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	3-3

For other power supply options consult factory.

PHOTOMETRIC DATA

Coming Soon

Job Name/Date:

Fixture Type Designation: