

SPY 70 FLOODLIGHT

SPY is a versatile outdoor floodlight, also available as a downlight, that comes in three sizes and is 355° rotatable, for fulfilling every lighting situation. It has optics set back from the edge of the main body to allow precision without glare. Also available in a wall or 'treehugger' version which can be secured to branches, poles or other supports. Spy 70 is the medium size version with a 2.8" diameter, and 5W of power. Dark Sky compliant for output below 80°.



SPY 70 FLOODLIGHT



SPY 70 FLOODLIGHT ON POLE

Fixture Dimensions - see page 2

TECHNICAL DATA

Wattage	5W
Power Supply	Integral 120VAC
Dimming	On/Off
Construction	Body: 6026 Anticorodal Aluminum Bracket: Extruded Aluminum Peg / Visor: Stainless Steel Lens: Extra Clear Tempered Glass
CCT	2700K, 3000K, 4000K
BUG Rating	B1-U0-G0 (3000K)
CRI	>80
Delivered Lumens	430 lm (3000K) Dark Sky compliant, output below 80°
Efficacy	86.0 lm/W (3000K)
Optics	15°, 26°, 60°, 13°-48° Zoom
Finishes	Anthracite, Dark Brown, Dark Green
Lumen Maintenance	60,000 hrs (Ta 50°C)
Fixture Dimensions	Ø 2.76" x 3.94" l x 5.00" h Pole heights: 16.14", 27.95", 39.76" Base: Ø2.76" Spike: Ø0.79" x 9.84" h
IP Rating	IP66
Impact Resistance	IK06

ORDERING INFORMATION

Example: F43130.1.3.88.02.US. Accessories ordered separately.



					.US
Model No.	Finish	CCT	Optics	Cable Length	
F43128 - Flood	1 - Anthracite	2 - 2700K	87 - 15°	01 - 4.92'	.US
F43129 - With Base 16.14" h	8 - Dark Brown	3 - 3000K	88 - 26°	02 - 16.40'	
F43130 - With Base 27.95" h	D - Dark Green	4 - 4000K	56 - 60°	03 - 32.81'	
F43131 - With Base 39.76" h			90 - 13°-48° Zoom	04 - 49.21'	
F43132 - With Spike 16.14" h					
F43133 - With Spike 27.95" h					
F43134 - With Spike 39.76" h					

Job Name/Date:


Fixture Type Designation:

SPY 70 FLOODLIGHT


FIXTURE DIMENSIONS




SPY 70 FLOOD / Base
16.1 in




SPY 70 FLOOD / Base
28.0 in




SPY 70 FLOOD / Base
39.8 in

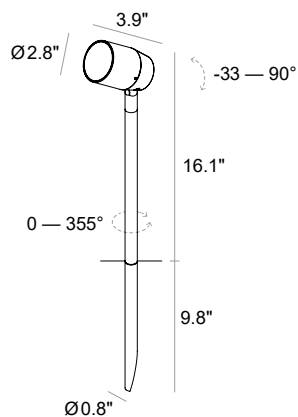

SPY 70 FLOOD / Spike
16.1 in

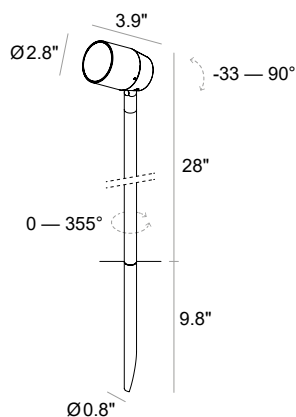

SPY 70 FLOOD / Spike
28.0 in

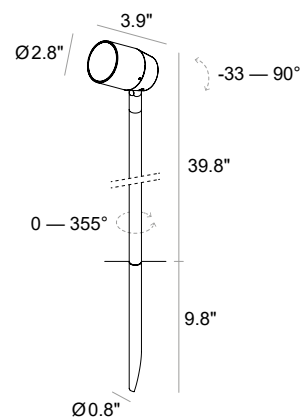




SPY 70 FLOOD / Spike
39.8 in

Job Name/Date:

Fixture Type Designation:

SPY 70 FLOODLIGHT


ACCESSORIES

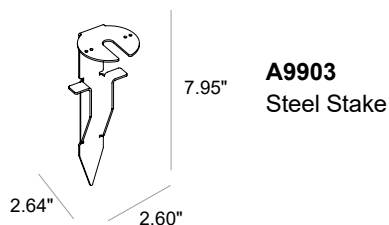

PHOTOMETRIC DATA


Note all Photometry is 3000K

Maximum Candela = 4661.4

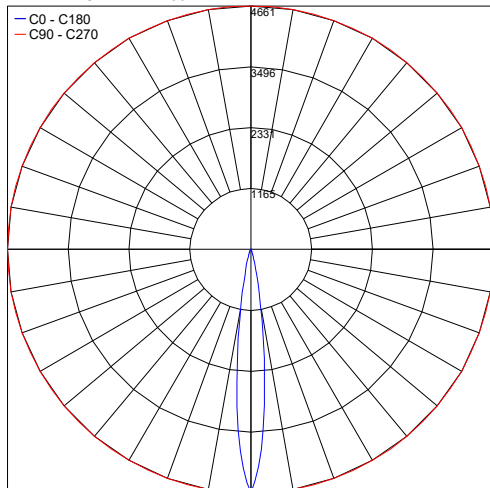


PHOTOMETRIC FILENAME : SPY 70 FLOODLIGHT 30K 13°-48° 5.0IN - 43128.X.3.90.IES

Maximum Candela = 7470.2

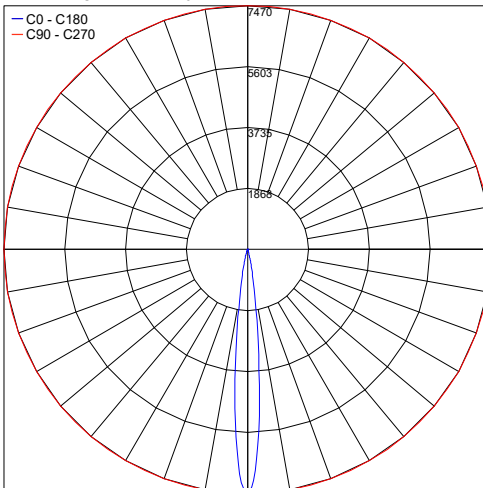


PHOTOMETRIC FILENAME : SPY 70 FLOODLIGHT 30K 15° 5.0IN - 43128.X.3.87.IES

Maximum Candela = 1960.1

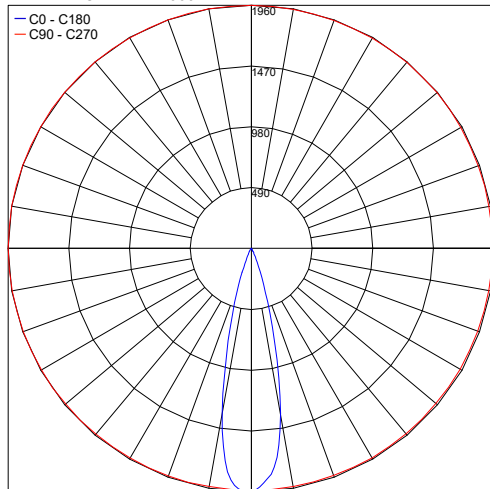

PHOTOMETRIC FILENAME : SPY 70 FLOODLIGHT 30K 26° 5.0IN - 43128.X.3.88.IES

Maximum Candela = 466.4

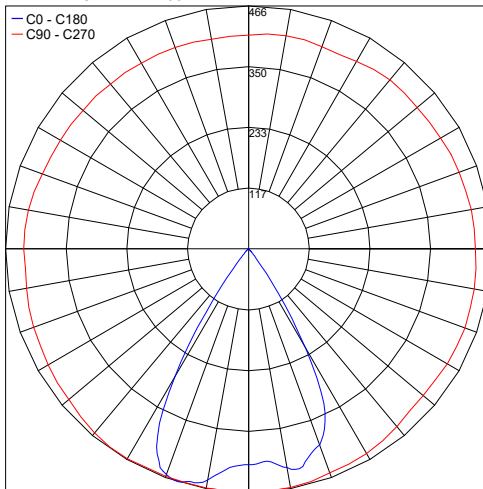

PHOTOMETRIC FILENAME : SPY 70 FLOODLIGHT 30K 60° 5.0IN - 43128.X.3.56.IES

Job Name/Date:

Fixture Type Designation: