


# SLICE ROUND

designplan®

datasheet


At 0.49" thick and high lumen output, Slice is a revolutionary indoor recessed luminaire made of AirCoral® characterized by its slim design. With no need for a mounting box, Slice can be both ceiling and wall mounted, fitted into the thickness of the drywall panel or plaster. It is available in a square or round version with 3000K standard color temperature and diffuse optics.

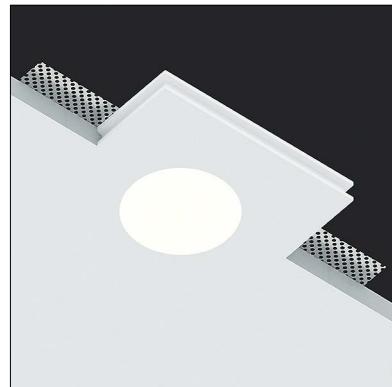

## TECHNICAL DATA

<b>Wattage / Input</b>	7W (300mA)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: AirCoral®
<b>CCT</b>	3000K (standard) 2700K, 4000K (on request)
<b>CRI</b>	>90
<b>Delivered Lumens</b>	612 lm (3000K)
<b>Efficacy</b>	72 lm/W (3000K)
<b>Optics</b>	Diffuse
<b>Finishes</b>	AirCoral® - Unfinished
<b>Fixture Dimensions</b>	3.94" l x 3.94" w x 0.49" h
<b>Cut-Out Dimensions</b>	5.12" x 5.12"
<b>Aperture</b>	Ø2.36"
<b>Fixture Weight</b>	0.18 lbs
<b>LED Source</b>	1 COB Professional LED
<b>IP Rating</b>	IP40

Fixture Dimensions:

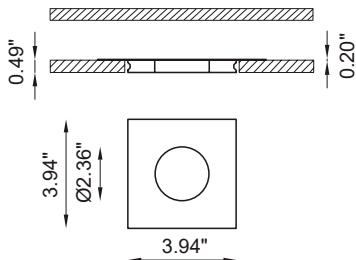

## ORDERING INFORMATION

Example: BU1923.AC4R00M30WD.US Power Supplies ordered separately.

BU1923.AC4R00M		WD.US
<b>Model No.</b> BU1923.AC4R00M	<b>CCT</b> 30 - 3000K (standard) 27 - 2700K (on request) 40 - 4000K (on request)	WD.US

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

300mA


Part Number	Description	Input/Output	Fixtures
<a href="#">PPLT00466-P</a>	0-10V Dimming to 1.0%	120-277VAC to 300mA, 10W, Class 2, DAMP	1-1
<a href="#">PPLT00467-P</a>	0-10V Dimming to 1.0%	120-277VAC to 300mA, 50W, Class 2, DAMP	1-2
<a href="#">PPLT00558-P</a>	0-10V Dimming to 0.1%	120-277VAC to 300mA, 75W, Class 2	1-2

For other power supply options consult factory.

## PHOTOMETRIC DATA

Note: all photometry is 3000K

Maximum Candela = 315.7

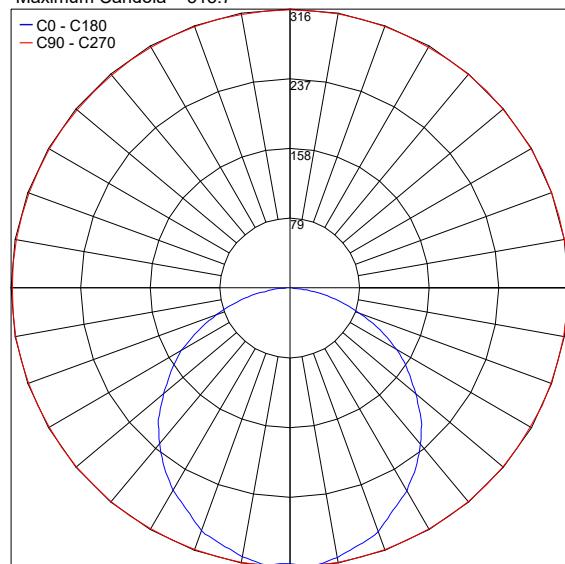

Job Name/Date:

Fixture Type Designation: