


SLICE ROUND


At 0.49" thick and high lumen output, Slice is a revolutionary indoor recessed luminaire made of AirCoral® characterized by its slim design. With no need for a mounting box, Slice can be both ceiling and wall mounted, fitted into the thickness of the drywall panel or plaster. It is available in a square or round version with 3000K standard color temperature and diffuse optics.

TECHNICAL DATA

Wattage / Input	8.5W (350mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: AirCoral®
CCT	3000K (standard) 2700K, 4000K (on request)
CRI	>90
Delivered Lumens	612 lm (3000K)
Efficacy	72 lm/W (3000K)
Optics	Diffuse
Finishes	AirCoral® - Unfinished
Fixture Dimensions	3.94" l x 3.94" w x 0.49" h
Cut-Out Dimensions	5.12" x 5.12"
Aperture	Ø2.36"
Fixture Weight	0.18 lbs
LED Source	1 COB Professional LED
IP Rating	IP40

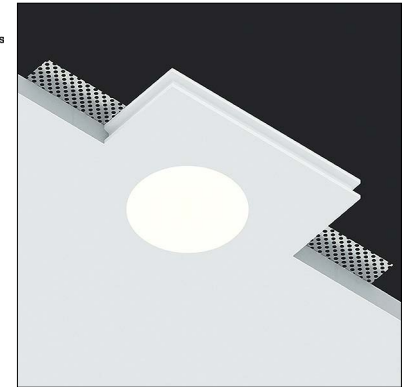

Fixture Dimensions:

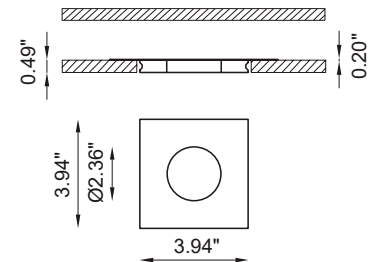

ORDERING INFORMATION

Example: BU1923.AC4R00M30WD.US Power Supplies ordered separately.

BU1923.AC4R00M		WD.US
Model No.	CCT	
BU1923.AC4R00M	30 - 3000K (standard) 27 - 2700K (on request) 40 - 4000K (on request)	WD.US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA


Part Number	Description	Input/Output	Fixtures
PPLT00468	Phase Dim (120V Only)	120VAC to 350mA, 14W, Class 2	1-1
PPLT00263	Trailing-Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	1-1
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 50W, Class 2, DAMP	1-2
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-2

Suggested Lutron Compatible Drivers

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	Fixtures
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC, 350mA, 13W	1-1
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC, 350mA, 19W	2-2

For other power supply options consult factory.

PHOTOMETRIC DATA

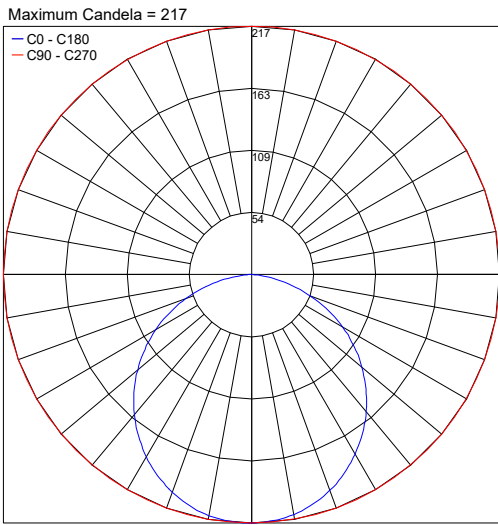

Job Name/Date:

Fixture Type Designation: