


Tessuto Wood is hanging LED pendant, designed by Giovanni Cenni Studio, with an ash wood cylinder, brass canopy and a ivory linen cylindrical shade. It hangs on a 6.56 foot black fabric wire and is available in 2700K.



TECHNICAL DATA

Wattage	5W
Power Supply	Remote 24VDC, not included. See page 2.
Light Source	Modulo LED
Construction	Body: Ash Wood Canopy: Brass Lampshade: Ivory Linen
CCT	2700K
CRI	>80, >90
Delivered Lumens	660 lm
Efficacy	132 lm/W
Optics	15°, 25°, 30°
Finishes	Body: Wood, Natural Brass Details: Natural Brass Reflector: Ivory Linen
Fixture Dimensions	Head: Ø2.4" x 18.5" Shade: Ø7.9" Canopy: Ø2.4" x 4.7" Black Fabric Wire: 6.6'
IP Rating	IP20

Fixture Dimensions

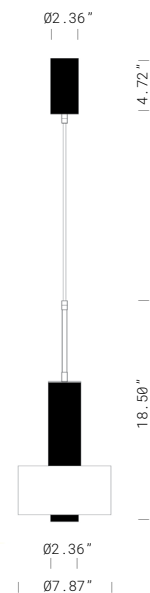

Uses Remote Driver
Does not require a J-Box

ORDERING INFORMATION

Example: R10.054.27.25.US. Power Supplies ordered separately.

R10.054	27	25	US
Model No.	CCT	Optics	
R10.054	27 - 2700K	25 - 25°	US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, DAMP	1-16
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-16

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3DAE / L3D0	L3DA/L3D0	100%-1%	Hi-Lume™ 0.1% EcoSystem™ or 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-15

DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description	Input/Output	# of Fixtures
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-15

For other power supply options consult factory.

PHOTOMETRIC DATA

Coming Soon

Job Name/Date:

Fixture Type Designation: