


Trenta X Due is a adjustable, wall mounted luminaire with 2 thin aluminum or brass cylinders on the end of steel or brass rod. Available in 3 color temperatures and 7 standard body finishes.



TECHNICAL DATA

Wattage	4.5W per beam
Power Supply	Remote 350mA, not included. See page 2.
Light Source	COB LED
Construction	Body: Aluminum or Brass Rods: Steel or Brass
CCT	2700K, 3000K
CRI	>80, >90
Delivered Lumens	630 lm per beam (2700K, >80) 660 lm per beam (3000K, >80)
Efficacy	140 lm/W per beam (2700K) 146.7 lm/W per beam (3000K)
Optics	15°-25°
Finishes	7 Standard Body, See Below 2 Standard Detail, See Below
Fixture Dimensions	Cylinder: Ø1.18" x 11.81" h Canopy/Base: 7.09" l x 2.17" h
IP Rating	IP20

Fixture dimensions

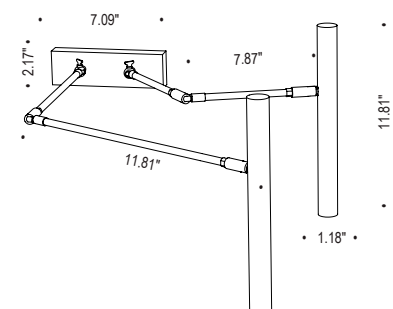

Uses Remote Driver
Does not require a J-Box

ORDERING INFORMATION

Example: R70.074.2X.2.ON.27.US.

R70.074.2X				US
Model No.	Body Finish	Detail Finish	CCT	
R70.074.2X	1 - Matte White painted 2 - Matte Black Painted 4 - Burnished Painted 7 - Iron Painted ON - Natural Brass ONS - Brushed Brass ONB - Burnished Brass	ON - Natural Brass ONB - Burnished Brass	27 - 2700K 30 - 3000K	US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00497	Phase Dim (120V only)	120VAC to 350mA, 12W, Class 2, DAMP	1-1
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 20W, Class 2, DAMP	1-3
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 50W, Class 2, DAMP	1-4

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00195	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	3-3
PPLT00676	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 20W, Class 2	2-3

For other power supply options consult factory.

PHOTOMETRIC DATA

*Coming Soon**Job Name/Date:**Fixture Type Designation:*