


Tubolare Nascosto is a thin linear suspended LED pendant made of aluminum with steel ceiling base and rods that is suitable for indoor installation. It is available in 2 color temperatures and 2 standard etched finishes (light or dark) and details in natural or burnished brass.



TECHNICAL DATA

Wattage	21.6W per 3.28 ft (1 m)
Power Supply	Remote 24VDC, not included. See page 2.
Light Source	Modulo Linear LED
Construction	Body; Aluminum Ceiling Base / Rods: Steel
CCT	2700K, 3000K
CRI	>90
Delivered Lumens	2050 lm per 3.28 ft (1 m)
Efficacy	95.0 lm/W per 3.28 ft (1 m)
Optics	Medium
Finishes	Body: Dark or Light Etched Details: Natural or Burnished Brass
Fixture Dimensions	78.74" l x 5.91" h x 1.38" w Ceiling Canopy: 15.75" l x 1.77" x 1.77"
IP Rating	IP20

Fixture Dimensions

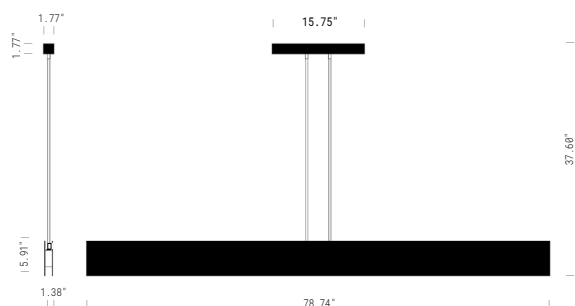

Uses Remote Driver - Does not require a J-Box

ORDERING INFORMATION

Example: R10.067.AC.ONB.27.US. Power supplies sold separately.

R10.067	.		.		.		.	US
Model No.		Body Finish		Detail Finish		CCT		
R10.067		AC - Light Etched AS - Dark Etched		ON - Natural Brass ONB - Burnished Brass		27 - 2700K 30 - 3000K		US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00155	Non-Dim	120VAC to 24VDC, 30W, Class 2	1-1
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-3

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3DAE / L3D0	L3DA/L3D0	100%-1%	Hi-Lume™ 0.1% EcoSystem™ or 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-3

DRIVERS IN NEMA 4X ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description	Input/Output	# of Fixtures
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-3

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation: