



DIVAR / TALON RECESSED

The evolution of two among the cutting edge products in Diomedea's production, **Divar** and **Talon** in their recessed versions aim to enrich the offerings of a collection that comes in numerous lighting solutions.


The body is made of extruded aluminum treated with electrophoresis and coated with polyester powder, while the front ring is crafted from white-painted stainless steel.

The available electrical equipment for the family is maintained, which includes mid-power LEDs with softer emission and a gentle beam, or power LEDs with emission controlled by different lens beams, both versions available in two LED colors. Installation is facilitated by stainless steel springs for false ceilings or alternatively with a recessed box for solid walls.


The power levels are linked to the type of LED selected by the user (power led or mid power led).


Talon > 120V MpL 4.8W 120V CRI≥80 pL 8.2W


Divar > 120V MpL 5.7W pL 12.1W CRI≥80 2700K/3000K

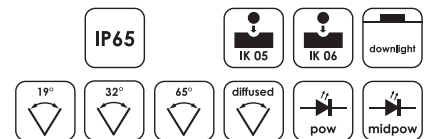

designplan®

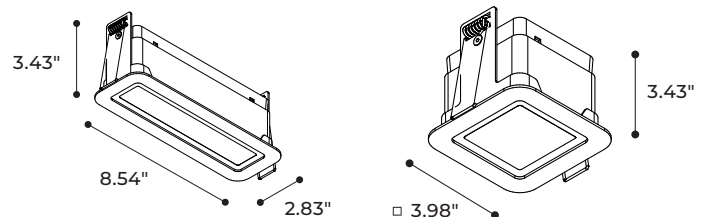

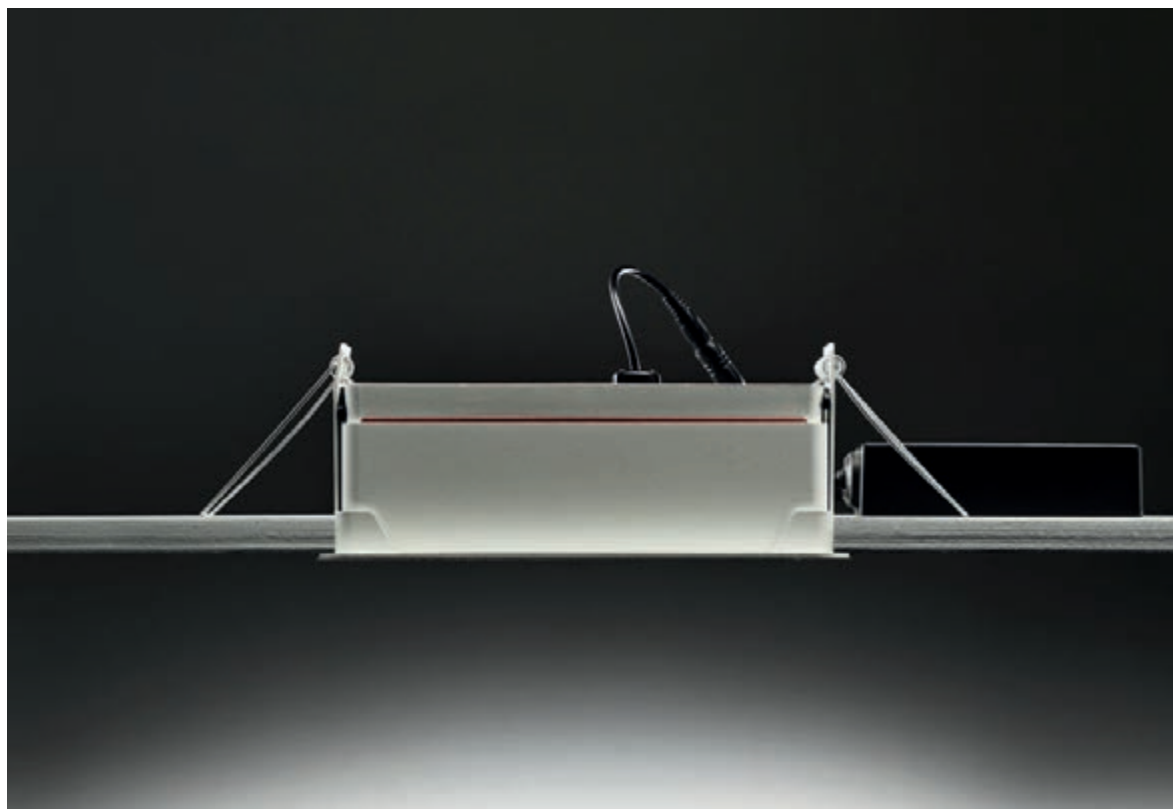


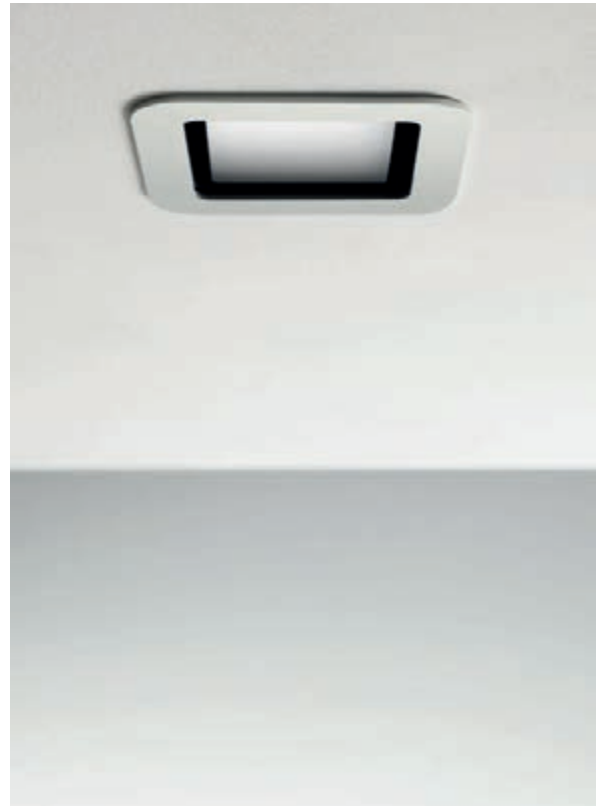


talon / divar recessed





divar / talon recessed

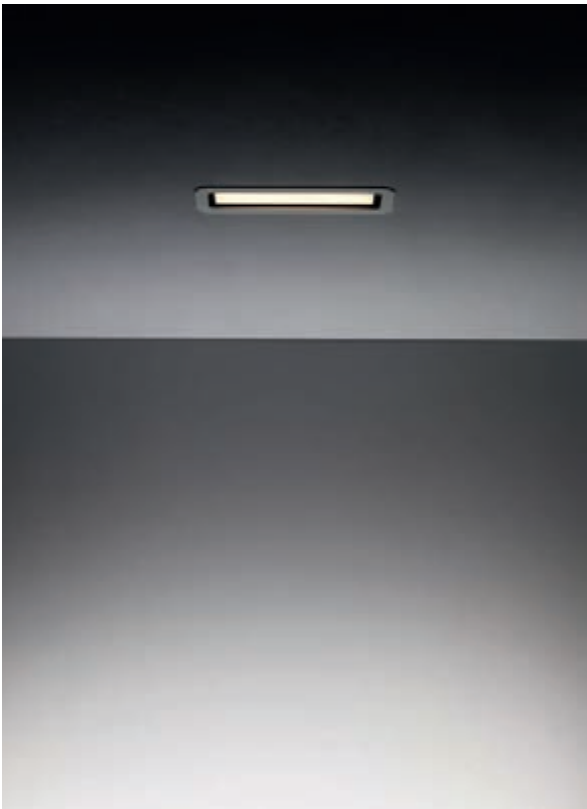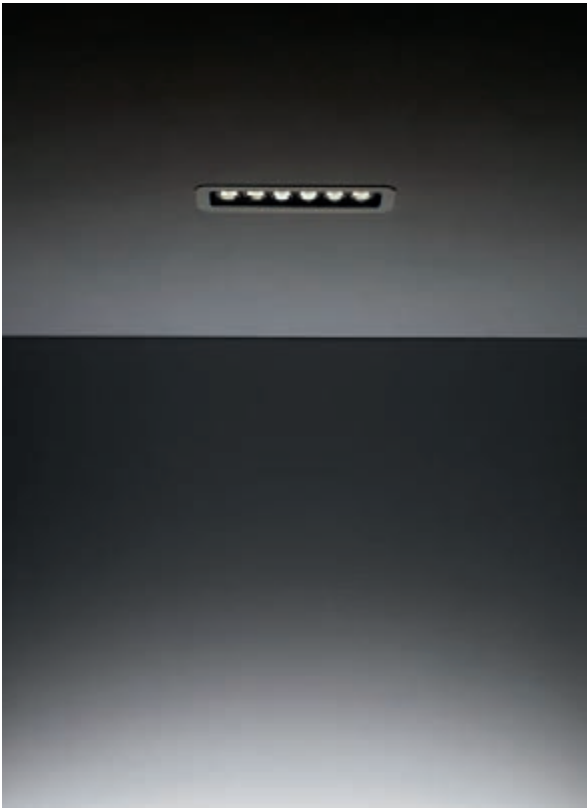



divar / talon recessed

Divar Recessed

Available finishes:



white			
2700K	120VAC	19°	D901031142
12W led		32°	D901031152
15W led		65°	D901031162

white			
2700K	120VAC	diffused	D901031172
5W led			
7W led			

white			
3000K	120VAC	19°	D901011142
12W led		32°	D901011152
15W led		65°	D901011162

white			
3000K	120VAC	diffused	D901011172
5W led			
7W led			

Talon Recessed

Available finishes:



white			
2700K	120VAC	19°	D901131162
8.2 W led		32°	D901131172
10.7 W total		65°	D901131182

white			
2700K	120VAC	diffused	D901131192
4.8 W led			
5.8 W total			

white			
3000K	120VAC	19°	D901111162
8.2 W led		32°	D901111172
10.7 W total		65°	D901111182

white			
3000K	120VAC	diffused	D901111192
4.8 W led			
5.8 W total			