

INTONO B WOOD 1.1

designplan®

datasheet


Intono B Wood is a compact bollard with a body made of weather-resistant teak sourced from FSC®-certified plantations, a die-cast aluminum head and stainless steel base. Perfect for illumination of pathways, squares and landscaped areas, its flat glass and zero upward light deliver a soft, glare-free light that highlights the walking surface and surrounding spaces. Available in 2 heights, 4 color temperatures, and an anthracite finish.

TECHNICAL DATA

Wattage / Input	9W
Power Supply	Remote 24VDC, not included. See page 2
Construction	Body: Die-Cast Aluminum, Teak Wood, Stainless Steel AISI 304 Lens: Gray-serigraphed, Acid-etched, Tempered Extra-clear Glass
CCT	2200K, 2700K, 3000K, 4000K
CRI	80
BUG Rating	B0-U1-G0 (3000K, Asym or Diffuse)
Delivered Lumens	331 lm (3000K, Diffuse)
Efficacy	36.8 lm/W (3000K, Diffuse)
Optics	Asymmetric, Diffuse
Finishes	Anthracite, Custom RAL on request
Fixture Dimensions	4.88" x 25.59" h Head: 3.94" Base: Ø3.90"
Fixture Weight	3.35 lbs
LED Source	1 High Intensity Power LED
Lumen Maintenance	L90, B10>60,000hrs (Ta 25°C)
Color Consistency	3-step MacAdam
Operating Temp.	-4°F to +122°F
IP Rating	IP66
IK Rating	IK06



Fixture Dimensions

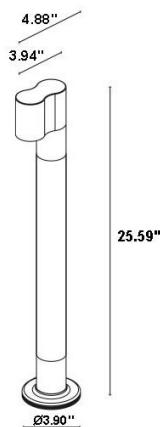

ORDERING INFORMATION

Example: NH1110001050AH. Power Supplies / Accessories ordered separately.

NH1110		0			
Model No.	Optical Accessories	CRI	CCT	Optics	Finish
NH1110	000 - None 001 - Anti-glare Screen NOTE: Anti-glare Shield only available on Asymmetric optics	0 - CRI 80	N - 2200K F - 2700K 5 - 3000K 9 - 4000K	0D - Diffuse 0A - Asymmetrical NOTE: Anti-glare Shield only available on Asymmetric optics. No Anti-glare Shield with Diffuse optics.	H - Anthracite C - Custom RAL (Consult factory for "C")

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, DAMP	1-8
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	2-8

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3DAE / L3D0	L3DA/L3D0	100%-1%	Hi-Lume™ 0.1% EcoSystem™ or 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-8

DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V




PPLT00715

Part Number	Description	Input/Output	# of Fixtures
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-8

For other power supply options consult factory.


ACCESSORIES

Installation



WPA00
Spike
For in-ground installation

Anti-glare



Anti-Glare Screen*
Half-Transparent & Half Serigraphed Black
Optical accessory added
in ordering matrix
*Can be fitted on Asymmetric optics only


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA


Note all Photometry is 3000K

Maximum Candela = 175.2

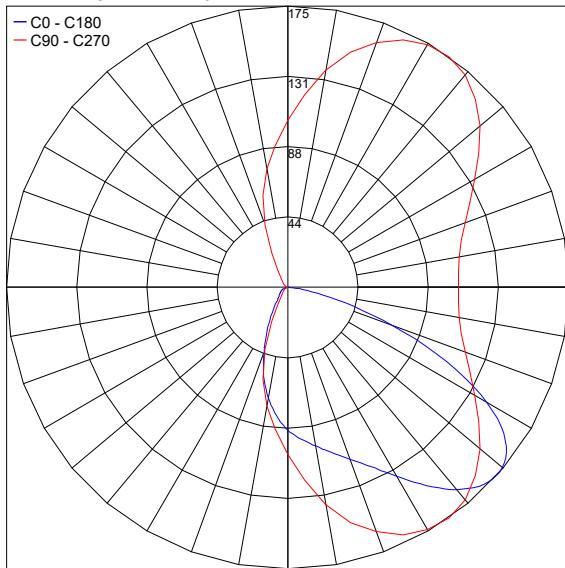

PHOTOMETRIC FILENAME : INTONO_B_1.1_A_3000K_9W_H23.6IN.IES

Maximum Candela = 137.3

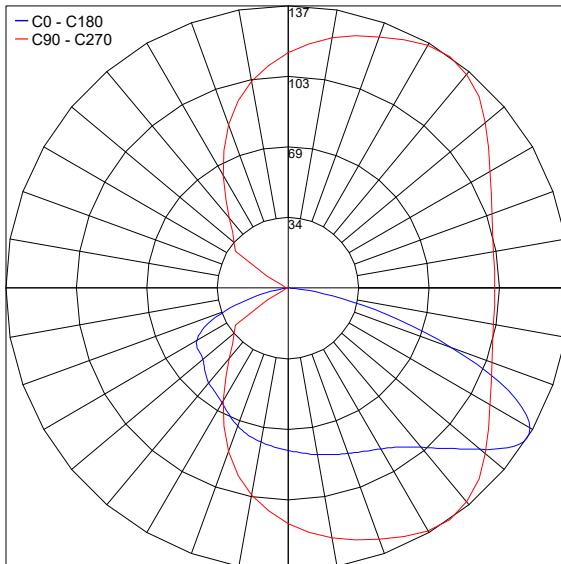

PHOTOMETRIC FILENAME : INTONO_B_1.1_D_3000K_9W_H23.6IN.IES

Job Name/Date:

Fixture Type Designation: