



Lila is a refined and discreet bollard with a disc of light placed on a thin, treated, and painted steel stem that comes in 2 different heights. Suitable for outdoor spaces, it can be installed on the surface with a base or in-ground with a spike, and is available in 2 color temperatures with a black finish.



TECHNICAL DATA

Wattage	6W
Power Supply	Remote 24VDC, not included. See page 2
Construction	Body/Stem: Steel Lens: Sandblasted, Transparent PMMA
CCT	2700K, 3000K
CRI	>90
BUG Rating	B0-U3-G1
Delivered Lumens	560 lm (3000K)
Efficacy	93.3 lm/W
Optics	Diffuse
LED Source	Mid Power LED
Finishes	Black
Fixture Dimensions	Ø5.12" x 16.93" or 28.74" h Spike: 9.72"
IP Rating	IP65
Impact Resistance	IK06

Fixture Dimensions



ORDERING INFORMATION

Example: D9025110011.US. Power Supplies / Accessories ordered separately.

D9025			11	.	US
Model #	CCT	Height / Base Type	Finish		
D9025	31 - 2700K 11 - 3000K	00 - 16.9" height with base 01 - 28.7" height with base 02 - 16.9" height with spike 03 - 28.7" height with spike	11 - Black	US	

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-13
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	2-13

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3DAE / L3D0	L3DA/L3D0	100%-1%	Hi-Lume™ 0.1% EcoSystem™ or 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-12

DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description	Input/Output	# of Fixtures
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-12

For other power supply options consult factory.


ACCESSORIES**D9076**Anti-Glare Cover
Optional

Job Name/Date:


Fixture Type Designation:

PHOTOMETRIC DATA

Maximum Candela = 165.2

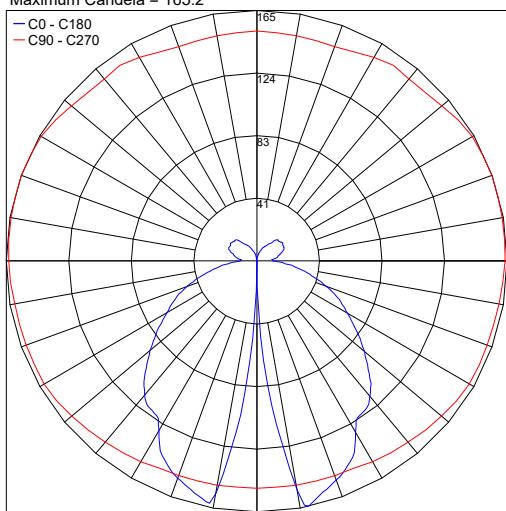

Maximum Candela = 170.3

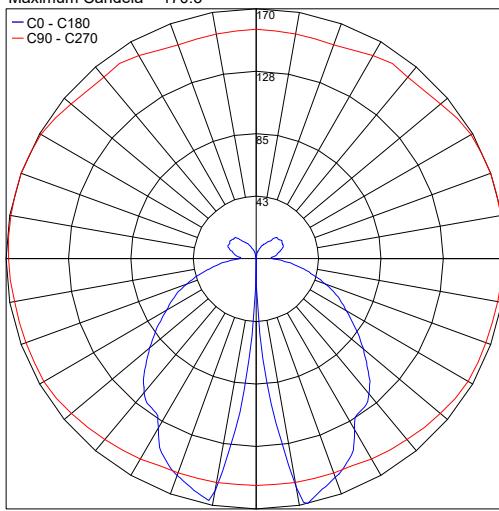

Job Name/Date:

Fixture Type Designation: