


Lila is a refined and discreet bollard with a disc of light placed on a thin, treated, and painted steel stem that comes in 2 different heights. Suitable for outdoor spaces, it can be installed on the surface with a base or in-ground with a spike, and is available in 2 color temperatures with a black finish.



## TECHNICAL DATA

|                           |                                                         |
|---------------------------|---------------------------------------------------------|
| <b>Wattage</b>            | 6W                                                      |
| <b>Power Supply</b>       | Remote 24VDC, not included. See page 2                  |
| <b>Construction</b>       | Body/Stem: Steel<br>Lens: Sandblasted, Transparent PMMA |
| <b>CCT</b>                | 2700K, 3000K                                            |
| <b>CRI</b>                | >90                                                     |
| <b>BUG Rating</b>         | B0-U3-G1                                                |
| <b>Delivered Lumens</b>   | 560 lm (3000K)                                          |
| <b>Efficacy</b>           | 93.3 lm/W                                               |
| <b>Optics</b>             | Diffuse                                                 |
| <b>LED Source</b>         | Mid Power LED                                           |
| <b>Finishes</b>           | Black                                                   |
| <b>Fixture Dimensions</b> | Ø5.12" x 16.93" or 28.74" h<br>Spike: 9.72"             |
| <b>IP Rating</b>          | IP65                                                    |
| <b>Impact Resistance</b>  | IK06                                                    |

## Fixture Dimensions

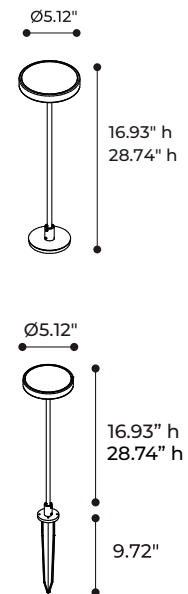

## ORDERING INFORMATION

Example: D9025110011.US. Power Supplies / Accessories ordered separately.

| D9025   |                          |                                                                                                                            | 11         | US |
|---------|--------------------------|----------------------------------------------------------------------------------------------------------------------------|------------|----|
| Model # | CCT                      | Height / Base Type                                                                                                         | Finish     |    |
| D9025   | 31 - 2700K<br>11 - 3000K | 00 - 16.9" height with base<br>01 - 28.7" height with base<br>02 - 16.9" height with spike<br>03 - 28.7" height with spike | 11 - Black | US |

Job Name/Date:

Fixture Type Designation:

**SUGGESTED POWER SUPPLIES**

24VDC

| Part Number               | Description                                             | Input/Output                       | # of Fixtures |
|---------------------------|---------------------------------------------------------|------------------------------------|---------------|
| <a href="#">PPLT00586</a> | Non-Dim                                                 | 120-277VAC to 24VDC, 40W, Class 2  | 1-5           |
| <a href="#">PPLT00543</a> | 0-10V Dimming to 15% (-40°C / -40°F cold weather start) | 120-277VAC to 24VDC, 100W, Class 2 | 2-13          |

Suggested Lutron Compatible

| Part Number               | Option       | Lutron SKU | Dim Range | Description                                   | Input/Output                      | # of Fixtures |
|---------------------------|--------------|------------|-----------|-----------------------------------------------|-----------------------------------|---------------|
| <a href="#">PPLT00530</a> | L3DAE / L3D0 | L3DA/L3D0  | 100%-1%   | Hi-Lume™ 0.1% EcoSystem™ or 3-Wire LED Driver | 120-277VAC to 24VDC, 96W, Class 2 | 1-12          |


**DRIVERS IN NEMA ENCLOSURE**

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

| Part Number               | Description                         | Input/Output                                | # of Fixtures |
|---------------------------|-------------------------------------|---------------------------------------------|---------------|
| <a href="#">PPLT00715</a> | ELV / TRIAC / 0-10V Dimming to 0.1% | 120-277VAC to 24VDC, 96W, Class 2, WET/DAMP | 1-12          |


*For other power supply options consult factory.***ACCESSORIES**

**D9076**  
Anti-Glare Cover  
*Optional*

*Job Name/Date:**Fixture Type Designation:*


## PHOTOMETRIC DATA

Maximum Candela = 165.2

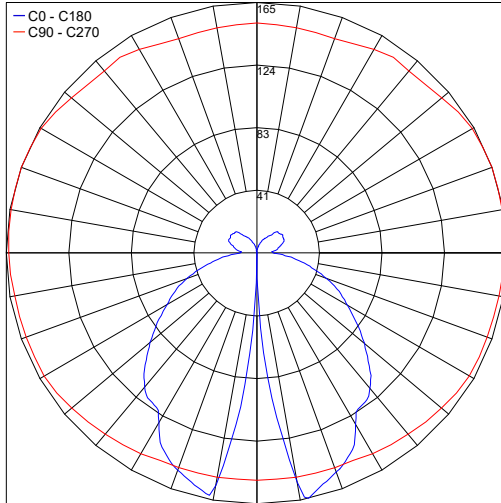

PHOTOMETRIC FILENAME : LILA-2700K-24VDC.IES

Maximum Candela = 170.3

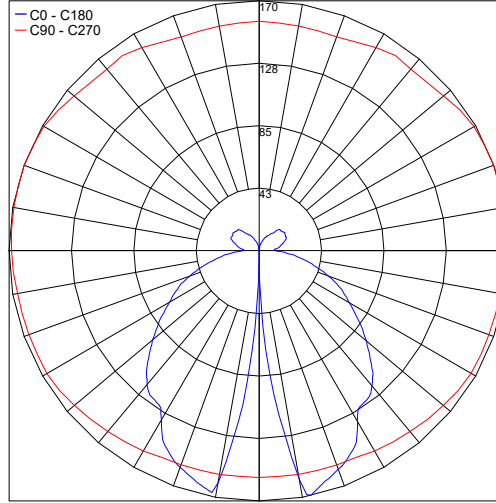

PHOTOMETRIC FILENAME : LILA-3000K-24VDC.IES

Job Name/Date:

Fixture Type Designation: