


Lucignolo is an elegant wall or floor mounted luminaire with a soft focused light that becomes a decorative element while also being a functional fixture. It is available in single or double light emission, 2 color temperatures and 10 standard finishes.



ADA Compliant

Fixture Dimensions



TECHNICAL DATA

Wattage	3W (single), 2 x 3W (double)
Power Supply	Remote 24VDC, not included. See page 2
Construction	Body: Die-Cast Aluminum
CCT	2700K, 3000K
CRI	>90
BUG Rating	B0-U0-G0 (single) B0-U3-G0 (double)
Delivered Lumens	303 lm (3000K, single) 606 lm (3000K, double)
Efficacy	101 lm/W per beam (3000K)
Optics	Diffuse
LED Source	Mid Power LED
Finishes	10 Standard, See Below
Fixture Dimensions	4.61" w x 4.72" h x 1.30" d
IP Rating	IP65
Impact Resistance	IK09

ORDERING INFORMATION

Example: D902211104.US. Accessories / Power Supplies ordered separately.

D9022				US
Model #	CCT	Optics / Wattage	Finish	
D9022	32 - 2700K 12 - 3000K	00 - Single / Mono Emission 01 - Double Emission	2 - White 3 - Sand 4 - Graphite 5 - Aluminum 8 - Corten 12 - Gold 13 - Gold Matte 14 - Bronze 15 - Bronze Matte	US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00586	Non-Dim	120-277VAC to 24VDC, 40W, Class 2	1-10
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	3-26

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3DAE / L3D0	L3DA/L3D0	100%-1%	Hi-Lume™ 0.1% EcoSystem™ or 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-25


DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description	Input/Output	# of Fixtures
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-25



*For other power supply options consult factory.***ACCESSORIES****Installation****D9019**

Recessed Box

*For installation**Job Name/Date:**Fixture Type Designation:*

PHOTOMETRIC DATA

Note: All photometry is 3000K

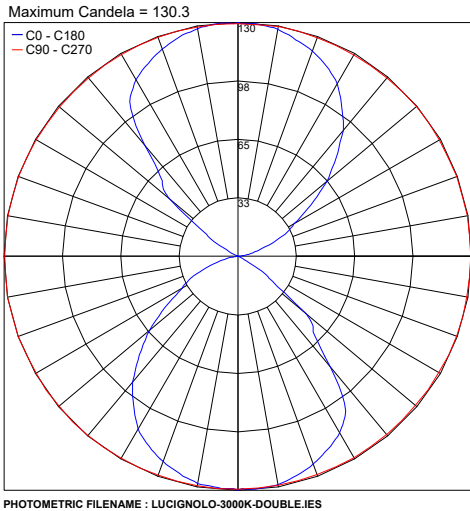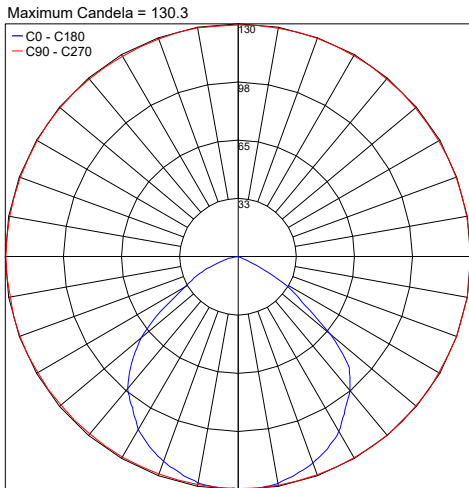

Job Name/Date:

Fixture Type Designation: