


Olo Wood is a cylindrical bollard made of weather-resistant teak sourced from FSC®-certified plantations and a head and base of die-cast aluminum in an anthracite finish. Designed to deliver refined, functional lighting for both urban and residential spaces, it is available in two heights with 360° radial emission for broad, diffuse lighting or 180° semicircular emission for a more targeted output, and high-performance optics that can be tilted ±6° to compensate for uneven ground and maintain a perfectly horizontal beam.

## TECHNICAL DATA

<b>Wattage</b>	14W, 19W
<b>Power Supply</b>	Integral 120-277VAC
<b>Dimming</b>	On/Off or DALI 2
<b>Construction</b>	Head: Die-cast Aluminum Body: Teak Wood Mounting Plate: 316L Stainless Steel Lens: Optical Grade PC
<b>CCT</b>	2200K, 2700K, 3000K, 4000K 2200K+3000K (DALI only)
<b>CRI</b>	80
<b>BUG Rating</b>	B1-U1-G1
<b>Delivered Lumens</b>	1460 lm (14W, 3000K, 180°) 2057 lm (19W, 3000K, 360°)
<b>Efficacy</b>	104.3 lm/W (14W, 3000K, 180°) 108.3 lm/W (19W, 3000K, 360°)
<b>Optics</b>	Radial 180°, Radial 360°
<b>Finishes</b>	Anthracite, Custom RAL on request
<b>Fixture Dimensions</b>	Ø8.11" x 31.50" h - Base: 4.33"
<b>Fixture Weight</b>	9.92 lbs (360°), 10.36 lbs (180°)
<b>LED Source</b>	72 mid-power LEDs, 156 mid-power LEDs
<b>Lumen Maintenance</b>	L90, B10>60,000hrs (Ta 25°C)
<b>Color Consistency</b>	3-Step MacAdam
<b>Operating Temp.</b>	-4°F to +122°F
<b>IP Rating</b>	IP66
<b>Impact Rating</b>	IK10



Fixture Dimensions

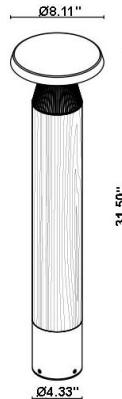

## ORDERING INFORMATION

Example: LH101000005RAH. Accessories ordered separately.


LH101			00			H
<b>Model #</b>	<b>Wattage</b>	<b>Power/Dim</b>	<b>Optical Access.</b>	<b>CCT</b>	<b>Optics</b>	<b>Finish</b>
LH101	0 - 14W (180°) 1 - 19W (360°)	00 - On/Off 0D - DALI-2	00 - No accessory	Z - 2200K+3000K (DALI-2 only) N - 2200K F - 2700K 5 - 3000K 9 - 4000K	RA - 180° (14W) RR - 360° (19W)	H - Anthracite C - Custom RAL (Consult factory for "C")

Job Name/Date:

Fixture Type Designation:

## ACCESSORIES

### Installation



### WULL10A0

Anchor Kit with Bolts

## ACCESSORIES

### Wiring



### WFA02

IP68 "h"-type three-way connector  
3.23" x 2.10" x 1.10"




### WFA06

Two-pin male-female connector  
IP66-IP68  
Ø0.91" x 3.74"

## PHOTOMETRIC DATA


*Note: All Photometry is 3000K*

Maximum Candela = 624.4

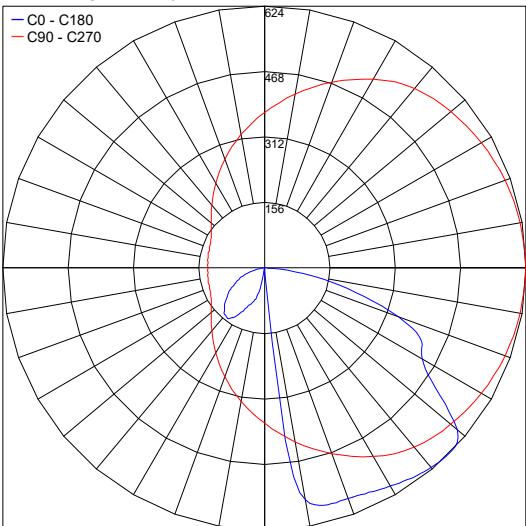

PHOTOMETRIC FILENAME : OLO WOOD\_1.0\_RA\_3000K\_14W.IES

Maximum Candela = 526.6

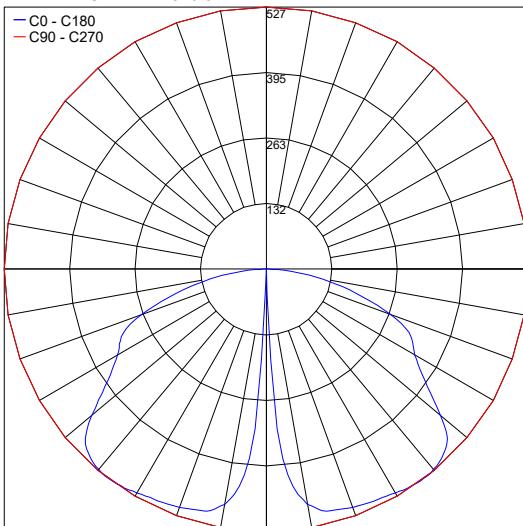

PHOTOMETRIC FILENAME : OLO WOOD\_1.0\_RR\_3000K\_19W.IES

Job Name/Date:

Fixture Type Designation: