

OLO WOOD 1.0


Olo Wood is a cylindrical bollard made of weather-resistant teak sourced from FSC®-certified plantations and a head and base of die-cast aluminum in an anthracite finish. Designed to deliver refined, functional lighting for both urban and residential spaces, it is available in two heights with 360° radial emission for broad, diffuse lighting or 180° semicircular emission for a more targeted output, and high-performance optics that can be tilted $\pm 6^\circ$ to compensate for uneven ground and maintain a perfectly horizontal beam.

TECHNICAL DATA

Wattage	14W, 19W
Power Supply	Integral 120-277VAC
Dimming	On/Off or DALI 2
Construction	Head: Die-cast Aluminum Body: Teak Wood Mounting Plate: 316L Stainless Steel Lens: Optical Grade PC
CCT	2200K, 2700K, 3000K, 4000K 2200K+3000K (DALI only)
CRI	80
BUG Rating	B1-U1-G1
Delivered Lumens	1460 lm (14W, 3000K, 180°) 2057 lm (19W, 3000K, 360°)
Efficacy	104.3 lm/W (14W, 3000K, 180°) 108.3 lm/W (19W, 3000K, 360°)
Optics	Radial 180°, Radial 360°
Finishes	Anthracite, Custom RAL on request
Fixture Dimensions	Ø8.11" x 31.50" h - Base: 4.33"
Fixture Weight	9.92 lbs (360°), 10.36 lbs (180°)
LED Source	72 mid-power LEDs, 156 mid-power LEDs
Lumen Maintenance	L90, B10>60,000hrs (Ta 25°C)
Color Consistency	3-Step MacAdam
Operating Temp.	-4°F to +122°F
IP Rating	IP66
Impact Rating	IK10



Fixture Dimensions

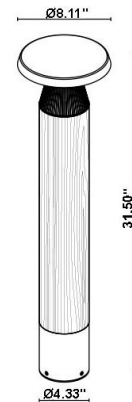

ORDERING INFORMATION


Example: LH101000005RAH. Accessories ordered separately.

LH101			00			H
Model #	Wattage	Power/Dim	Optical Accessory	CCT	Optics	Finish
LH101	0 - 14W (180°) 1 - 19W (360°) NOTE: 180° option is 14W, 360° option is 19W	00 - On/Off 0D - DALI-2	00 - No accessory	Z - 2200K+3000K (DALI-2 only) N - 2200K F - 2700K 5 - 3000K 9 - 4000K	RA - 180° (14W) RR - 360° (19W)	H - Anthracite

Job Name/Date:

Fixture Type Designation:

ACCESSORIES
Installation

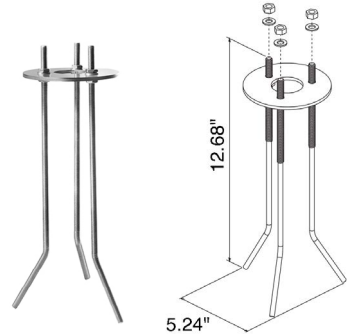

WULL10A0
Anchor Kit with Bolts

ACCESSORIES
Wiring




WFA02
IP68 "h"-type three-way connector
3.23" x 2.10" x 1.10"




WFA06
Two-pin male-female connector
IP66-IP68
Ø0.91" x 3.74"

PHOTOMETRIC DATA
Note: All Photometry is 3000K

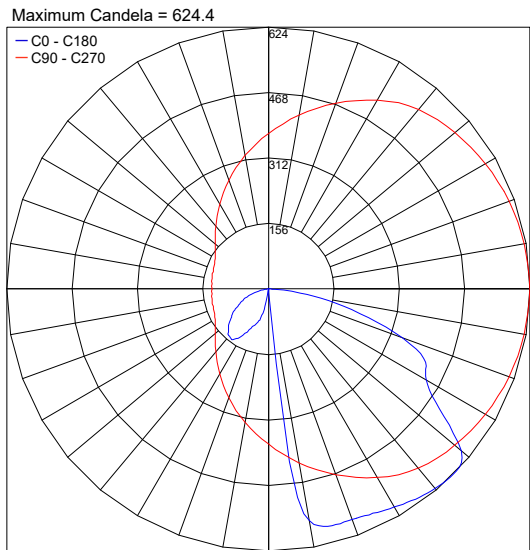

PHOTOMETRIC FILENAME : OLO WOOD_1.0_RA_3000K_14W.IES

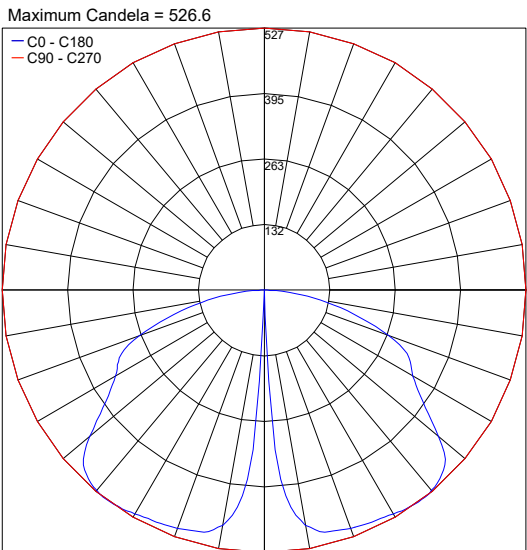

PHOTOMETRIC FILENAME : OLO WOOD_1.0_RR_3000K_19W.IES

Job Name/Date:

Fixture Type Designation: