

# TALON RECESSED


Talon Recessed is a square, recessed version of Talon suitable for outdoor installation in a variety of settings. It is made of extruded aluminum treated with electrophoresis and polyester powder coated, while the front ring is crafted from white-painted stainless steel. Available in 4 optics options (including diffused) and a standard white finish.



## TECHNICAL DATA

|                    |                                                                                                  |
|--------------------|--------------------------------------------------------------------------------------------------|
| Wattage            | 10.7W (Optics), 5.8W (Diffuse)                                                                   |
| Power Supply       | Integral 120VAC                                                                                  |
| Construction       | Body: Extruded Aluminum<br>Front Ring: Stainless Steel<br>Lens: Transparent or Sandblasted Glass |
| CCT                | 2700K, 3000K                                                                                     |
| CRI                | >80                                                                                              |
| BUG Rating         | B1-U0-G0 (19°, 32°, 65° - 3000K)<br>B0-U1-G0 (Diffuse - 3000K)                                   |
| Delivered Lumens   | 800 lm (32°, 3000K)<br>506 lm (Diffuse, 3000K)                                                   |
| Efficacy           | 74.8 lm/W (32°, 3000K)<br>87.2 lm/W (diffuse, 3000K)                                             |
| Optics             | 19°, 32°, 65°, Diffuse                                                                           |
| LED Source         | Power LED (10.7W)<br>Mid Power LED (5.8W)                                                        |
| Finishes           | White                                                                                            |
| Fixture Dimensions | 3.98" x 3.98" x 3.43" h                                                                          |
| IP Rating          | IP65                                                                                             |
| Impact Resistance  | IK06                                                                                             |

Fixture Dimensions

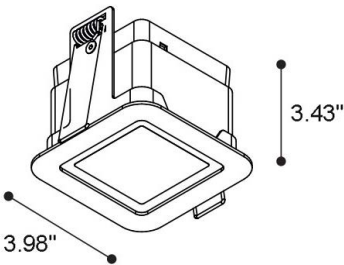

## ORDERING INFORMATION


Example: D901111172.US. Accessories ordered separately.

|         |                          |                                                         |           |    |
|---------|--------------------------|---------------------------------------------------------|-----------|----|
| D9011   |                          |                                                         | 2         | US |
| Model # | CCT                      | Optics                                                  | Finish    |    |
| D9011   | 31 - 2700K<br>11 - 3000K | 16 - 19°<br>17 - 32°<br>18 - 65°<br>19 - Diffuse (5.8W) | 2 - White | US |

Job Name/Date:

Fixture Type Designation:

## ACCESSORIES



### D9041

Metal Box


For solid ceiling installation

## PHOTOMETRIC DATA

Note: all photometry is 3000K

### 19°


Maximum Candela = 4740.4

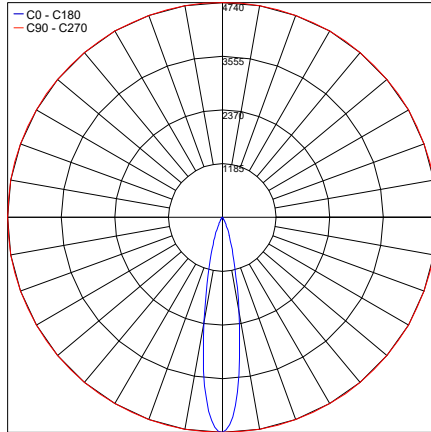

PHOTOMETRIC FILENAME : TALON RECESSED 19°\_3000K.IES

### 32°


Maximum Candela = 2818.7

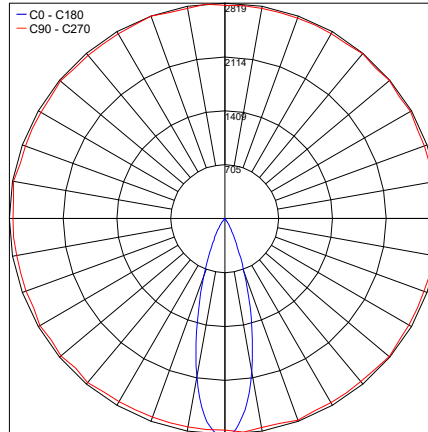

PHOTOMETRIC FILENAME : TALON RECESSED 32°\_3000K.IES

### 65°


Maximum Candela = 916.4

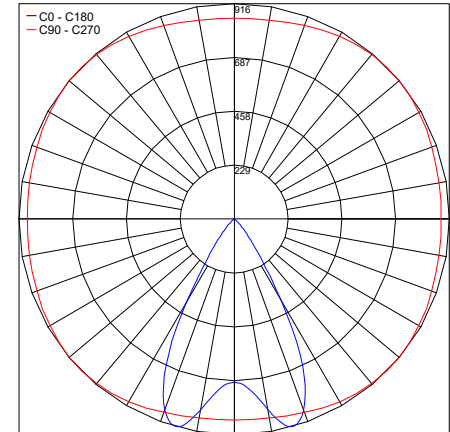

PHOTOMETRIC FILENAME : TALON RECESSED 65°\_3000K.IES

### Diffuse

Maximum Candela = 209.5

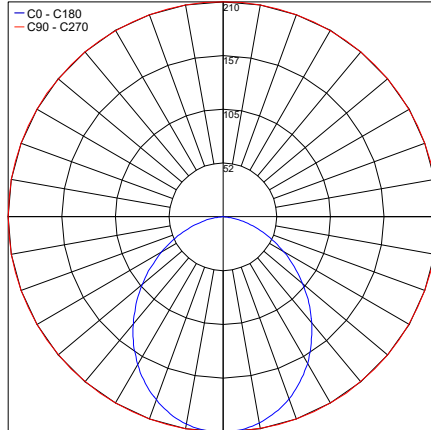

PHOTOMETRIC FILENAME : TALON RECESSED DIFFUSED\_3000K.IES

Job Name/Date:

Fixture Type Designation: