

Tasca is a recessed rectangular wall fixture for outdoor (or indoor) installation that is perfect for illuminating steps, walkways or outdoor spaces where efficient yet discreet lighting is needed. It is available in 2 color temperatures and 5 standard finishes.




TECHNICAL DATA

Wattage	3.6W
Power Supply	Remote 24VDC, not included. See page 2
Construction	Body: Die-cast Aluminum
CCT	2700K, 3000K
CRI	>80
BUG Rating	B0-U2-G1
Delivered Lumens	315 lm (3000K)
Efficacy	87.5 lm/W (3000K)
Optics	Diffuse
LED Source	Mid Power LED
Finishes	5 Standard, See Below
Fixture Dimensions	7.76" l x 3.23" h x 2.01" depth
IP Rating	IP65
Impact Resistance	IK09

ADA Compliant

Fixture Dimensions

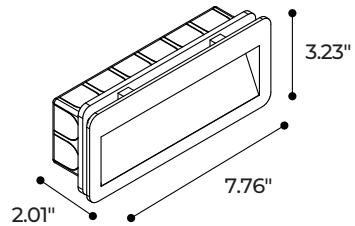

ORDERING INFORMATION

Example: D902412004.US. Power Supplies / Accessories ordered separately.

D9024		00		.	US
Model #	CCT	Optics / Wattage	Finish		
D9024	32 - 2700K 12 - 3000K	00 - Diffuse / 3.6W	2 - White 3 - Sand 4 - Graphite 5 - Aluminum 8 - Corten	US	

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-22
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	3-22

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3DAE / L3D0	L3DA/L3D0	100%-1%	Hi-Lume™ 0.1% EcoSystem™ or 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-21

DRIVERS IN NEMA ENCLOSURE


Remote 24VDC - ELV / TRIAC / 0-10V




PPLT00715

Part Number	Description	Input/Output	# of Fixtures
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-21

For other power supply options consult factory.

ACCESSORIES**Installation**

D9073
Recessed Box
For installation

Anti-Glare


D9074 - Gold
D9075 - Aluminum
Shield

Job Name/Date:


Fixture Type Designation:

PHOTOMETRIC DATA*Note: All photometry is 3000K*

Maximum Candela = 140.6

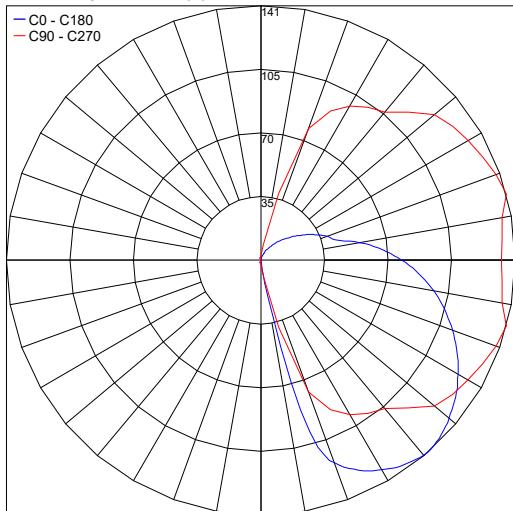

Maximum Candela = 145.0

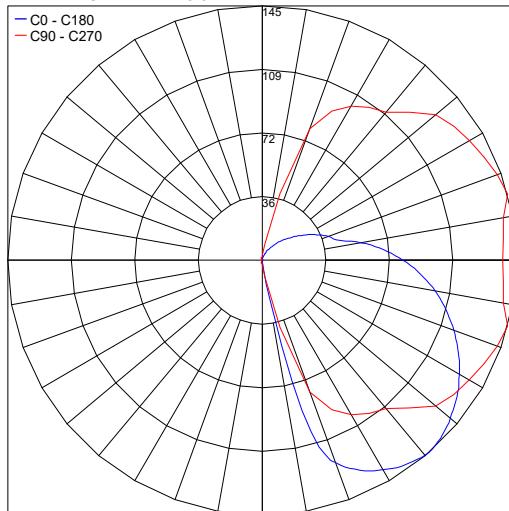

Job Name/Date:

Fixture Type Designation: