

ZERO 110


Zero is a round, IP67-rated, outdoor luminaire in 4 different sizes that can be used as an in-grade uplight or a recessed wall fixture. Zero 110 is the Ø4.3 inch diameter version available in 2 color temperatures and 3 optics options.

TECHNICAL DATA

Wattage	12W
Power Supply	Remote 24VDC, not included. See page 2
Construction	Body: Turned Aluminum Lens: Tempered, Transparent Glass
CCT	2700K, 3000K
CRI	>80
BUG Rating	B0-U5-G0 (3000K)
Delivered Lumens	1143 lm (3000K)
Efficacy	95.3 lm/W (3000K)
Optics	15°, 36°, 60°
LED Source	Power LED
Finishes	Natural Aluminum
Fixture Dimensions	Ø4.33" x 5.51"
IP Rating	IP67
Impact Resistance	IK06



Fixture Dimensions

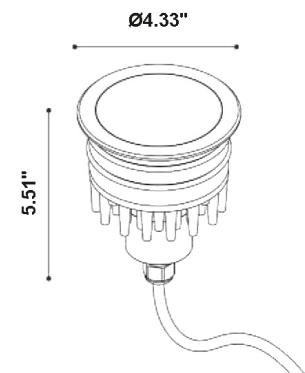

ORDERING INFORMATION

Example: D900132116.US. Power Supplies / Accessories ordered separately.

D9001		6	. US
Model #	CCT, Optics	Finish	
D9001	3201 - 2700K, 15° 3210 - 2700K, 36° 3211 - 2700K, 60° 1201 - 3000K, 15° 1210 - 3000K, 36° 1211 - 3000K, 60°	6 - Aluminum	US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures - 12W
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-6
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-6

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures 12W
PPLT00530	L3DAE / L3D0	L3DA/L3D0	100%-1%	Hi-Lume™ 0.1% EcoSystem™ or 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-6


DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description	Input/Output	# of Fixtures - 12W
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-6

*For other power supply options consult factory.***ACCESSORIES****Recessed Box**

D9000 - Ø3.94x8.11 in


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA


Note: all photometry is 3000K

Maximum Candela = 8572.1

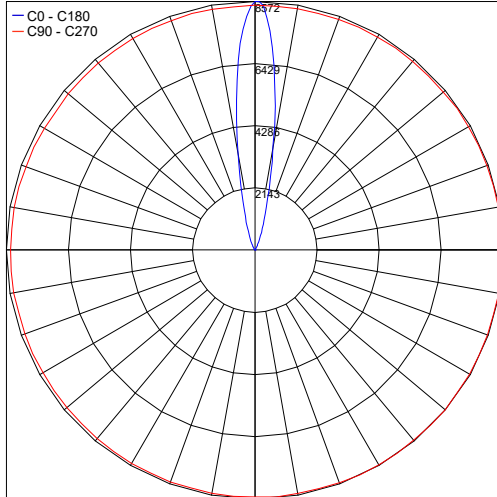


PHOTOMETRIC FILENAME : ZERO 110-4.3IN-3000K-15°.IES

Maximum Candela = 3331.11

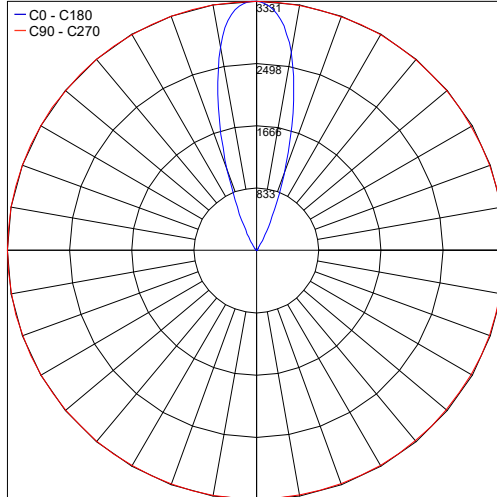

PHOTOMETRIC FILENAME : ZERO 110-4.3IN-3000K-35°.IES

Maximum Candela = 1422.4

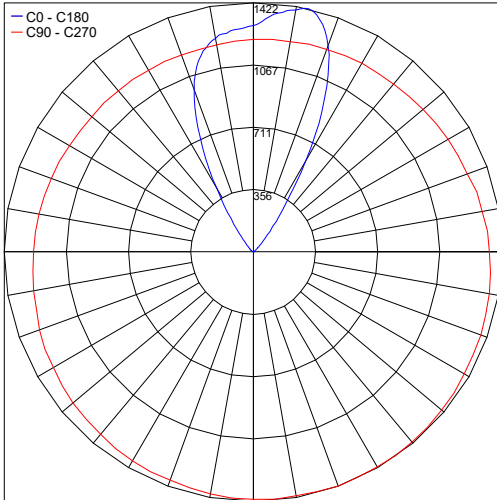

PHOTOMETRIC FILENAME : ZERO 110-4.3IN-3000K-60°.IES

Job Name/Date:

Fixture Type Designation: