


Zero is a round, IP67-rated, outdoor luminaire in 4 different sizes that can be used as an in-grade uplight or a recessed wall fixture. Zero 85 is the Ø3.4 inch diameter version available in 3000K, diffuse optics and with or without honeycomb louver.



TECHNICAL DATA

Wattage	6.5W
Power Supply	Remote 24VDC, not included. See page 2
Construction	Body: Turned Aluminum Lens: Tempered, Transparent Glass
CCT	2700K, 3000K
CRI	>80
BUG Rating	B0-U3-G0 (3000K)
Delivered Lumens	131 lm (3000K, with honeycomb) 451 lm (3000K, no honeycomb)
Efficacy	20.2 lm/W (3000K, with honeycomb) 69.4 lm/W (3000K, no honeycomb)
Optics	Diffuse
LED Source	Power LED
Finishes	Natural Aluminum
Fixture Dimensions	Ø3.35" x 2.36"
IP Rating	IP67
Impact Resistance	IK06

Fixture Dimensions

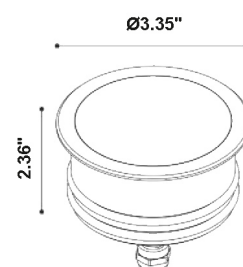

ORDERING INFORMATION

Example: D9001112166.US. Power Supplies / Accessories ordered separately.

D9001		6	US
Model #	CCT (Optics / Honeycomb)	Finish	
D9001	1208 - 3000K (Diffuse with Honeycomb) 1216 - 2700K (Diffuse with NO Honeycomb)	6 - Aluminum	US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures - 6.5W
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-12
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	2-12

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures 6.5W
PPLT00530	L3DAE / L3D0	L3DA/L3D0	100%-1%	Hi-Lume™ 0.1% EcoSystem™ or 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-11

DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description	Input/Output	# of Fixtures - 6.5W
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-11

*For other power supply options consult factory.***ACCESSORIES**

Recessed Box
D9003 - Ø3.35"

Job Name/Date:


Fixture Type Designation:

PHOTOMETRIC DATA

Note: all photometry is 3000K

Maximum Candela = 236.0

— C0 - C180
— C90 - C270

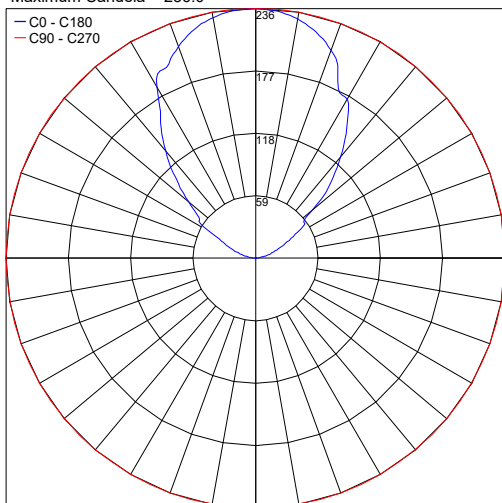

PHOTOMETRIC FILENAME : ZERO 85-3.4IN-3000K-DIFFUSED-NO-HONEYCOMB.IES

Job Name/Date:

Fixture Type Designation: