

C5X is a wet label, adjustable in-grade or submersible uplight that is 5.75 inches in diameter, and suitable for power washing and submersion using special remote drivers. It is adjustable +/- 10° (total 20°) and is rotatable 120° front and back. It comes in 4 CCTs or RGBW with integral DMX decoder. Driveover rated up to 11,000 lbs.

## TECHNICAL DATA

<b>Wattage / Input</b>	10W (Static White - 350mA) 12W (RGBW - 24VDC with DMX Decoder)
<b>Power Supply</b>	Remote, not included. See page 3
<b>Construction</b>	Body: Cast Stainless Steel 304 Alloy Lens: 0.4" Thick, Clear, Non-Skid or Frosted Tempered Glass Lens Frame: Threaded "Bottle Cap"
<b>CCT</b>	2700K, 3000K, 3500K, 4000K, RGBW
<b>CRI</b>	>80
<b>Initial Lumens</b>	1334 lm (3000K - Static White) 750 lm (3000K - RGBW)
<b>Efficacy</b>	133.4 lm/W (3000K - Static White) 62.5 lm/W (3000K - RGBW)
<b>Optics</b>	14°, 25° (Static White) 18°, 24° (RGBW)
<b>Finishes</b>	Stainless Steel
<b>Fixture Dimensions</b>	Ø5.75" x 5.25" h
<b>LED Source</b>	Citizen LED COB, RGBW COB
<b>IP Rating</b>	IP68, IP69
<b>Driveover Rated</b>	11,000 lbs (30mph)




UL 676



Fixture Dimensions - See page 2

Fixture Trim with Tempered Glass Lens

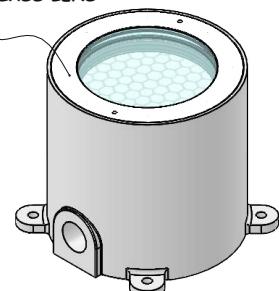

## ORDERING INFORMATION


Example: CXA-LEY4SS12LQW. Accessories sold separately.

C5X-L	-	4	SS1			
<b>Model #</b>	<b>CCT</b>	<b>Body</b>	<b>Finish</b>	<b>Optic</b>	<b>Lens</b>	<b>Options</b>
C5X-L	EW - 2700K EX - 3000K EY - 3500K EZ - 4000K	4 - Fully Recessed	SS1 - Stainless Steel Standard Grill	1 - 14° 2 - 25°	T - Clear Tempered Glass  Q - Clear Tempered Glass w/ Non-Skid Pattern  G - Frosted Tempered	0 - None W - Linear Spread  H - Honeycomb Louver  S - Solite Lens B - Special Lens A - Anti-Glare Shield  Note: Rubber Lens Holder PPG00274 included w/ options

Job Name/Date:

Fixture Type Designation:

## FIXTURE DIMENSIONS

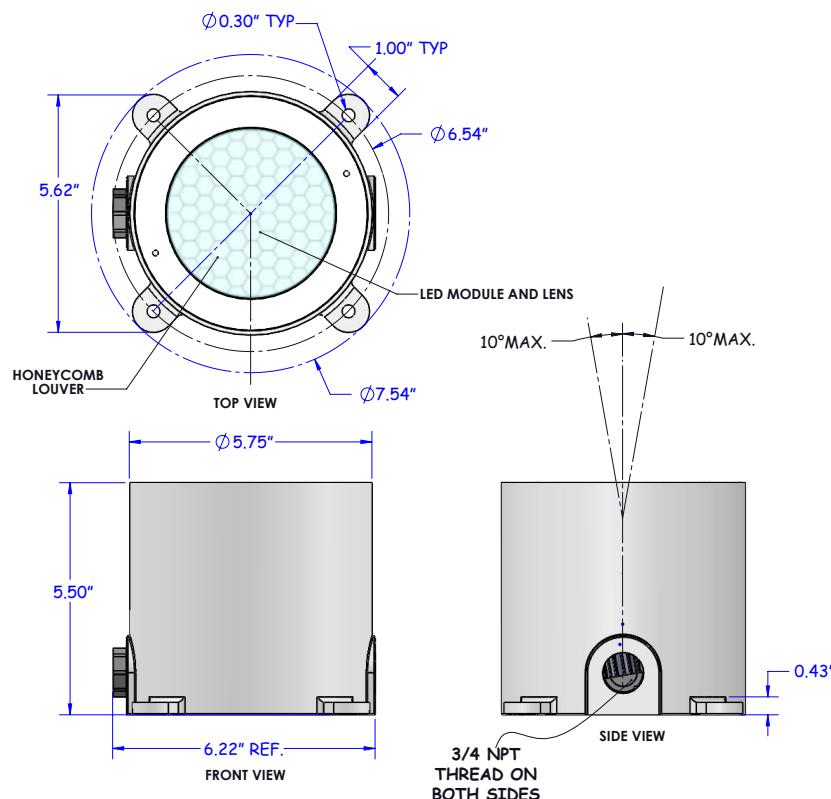


## ACCESSORIES

## Installation



LL301 - Optional  
Leveling Pad  
Set of 4

## Anti-Glare



PPDG0028001\*

Anti-Glare Shield - Ø4.2"

\*include as an option  
in ordering matrix

## PHOTOMETRIC DATA

Coming Soon

Job Name/Date:

Fixture Type Designation:

**SUGGESTED POWER SUPPLIES - In-Grade Use**

Static White - 350mA Remote Driver

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00468</a>	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	1-1
<a href="#">PPLT00263</a>	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	1-1
<a href="#">PPLT00214</a>	0-10V Dimming to 10%	120-277VAC to 350mA, 30W, Class 2, IP66	2-2
<a href="#">PPLT00561-P</a>	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-1

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00516</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	1-1

**SUGGESTED POWER SUPPLIES - In-Grade Use**

RGBW with integrated DMX - 24VDC Remote Driver

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00284</a>	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, DAMP	1-6
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F Cold Weather Start)	120-277VAC to 24VDC, 100W, Class 2	1-6

**DRIVERS IN NEMA ENCLOSURE - Remote 24VDC - ELV / TRIAC / 0-10V**

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00715</a>	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-6

**SUGGESTED POWER SUPPLIES - For Use with FOUNTAIN / WATER FEATURES**

RGBW with integrated DMX - 24VDC Remote Driver

Part Number	Description	Input/Output	# of Fixtures
<a href="#">FPV-100110024</a>	ELV / TRIAC & 0-10V Dimming 100% to 0%	120-277VAC to 24VDC, 96W, Class 2, NEMA 4X	1-6
<a href="#">FPV-100000024</a>	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, NEMA 4X	1-6

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation: