

Klimpt Wood is an LED bollard based on the Klimpt bollard suitable for outdoor installation. It has with a 4.5" square head and real teak or simulated wood inset in the aluminum body. Offered in 2 heights – 2-foot or 3-foot – with 3 static white color temperatures, 3 optics options, and 1 wood and 3 simulated wood options with 5 standard finishes. Dark Sky compliant.




MADE IN THE U.S.A. - Teak Wood Shown

## TECHNICAL DATA

<b>Wattage</b>	20W
<b>Power Supply</b>	Integral 120VAC
<b>Dimming</b>	0-10V Dimming
<b>Construction</b>	Body: Aluminum Lens: Clear
<b>CCT</b>	2700K, 3000K, 4000K
<b>BUG Rating</b>	B1-U0-G0 (3000K - All Optics)
<b>CRI</b>	>90
<b>Delivered Lumens</b>	1428 lm (24°, 3000K) 1356 lm (36°, 3000K) 1565 lm (Asym, 3000K) Dark Sky compliant
<b>Efficacy</b>	71.4 lm/W (24°, 3000K) 67.8 lm/W (36°, 3000K) 78.3 lm/W (Asym, 3000K)
<b>Optics</b>	24°, 36°, Asymmetric
<b>Finishes</b>	4 Wood Types - see below or page 2 5 Standard - See page 2 Custom RAL on request
<b>Fixture Dimensions</b>	Pole: 2.56" l x 2.20" w x 24.0" or 36.0" h Head: 4.48" x 4.48" x 1.42" h
<b>IP Rating</b>	IP65

## Fixture Dimensions

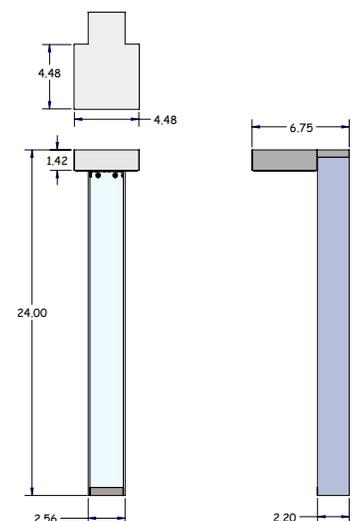

## ORDERING INFORMATION


Example: KLI-W-1-30-01-RW-11-C-0. Accessories ordered separately.

KLI-W	-		-		-		-	C	-	0
Model #	Height	CCT	Optics	Wood Finish	Finish	Dimming	Options			
KLI-W	1 - 2 ft 2 - 3 ft	27 - 2700K 30 - 3000K 40 - 4000K	01 - 24° 02 - 36° 03 - Asym.	RW - Sim. Rose Wood AW - Sim. Amber Wood BW - Sim. Black Walnut TK - Real Teak Wood	11 - White Suede 02 - Black Suede 03 - Gray 18 - Textured Bronze TS - Silver C - Custom	C - Integral 120VAC 0-10V Dimming	0 - None			

Job Name/Date:

Fixture Type Designation:

## ACCESSORIES - Installation



**AM-00010**  
Mounting Base  
Assembly

## WOOD FINISHES



Black Walnut



Rose Wood



Amber Wood

Real Teak Wood - Shown in Main Image on Page 1

## FINISHES



**18**  
Text. Bronze



**03**  
Gray



**02**  
Black Suede






**TS**  
Silver



**11**  
White Suede

## PHOTOMETRICS

Note: All photometry is 3000K

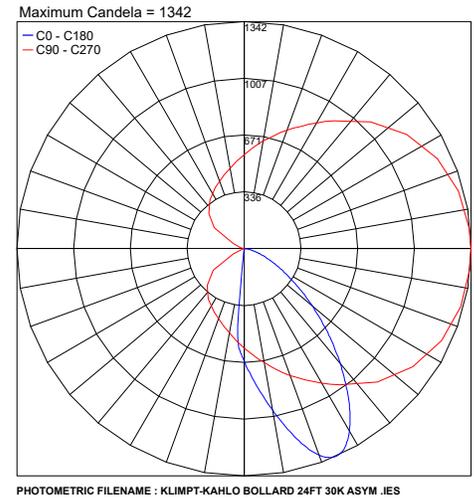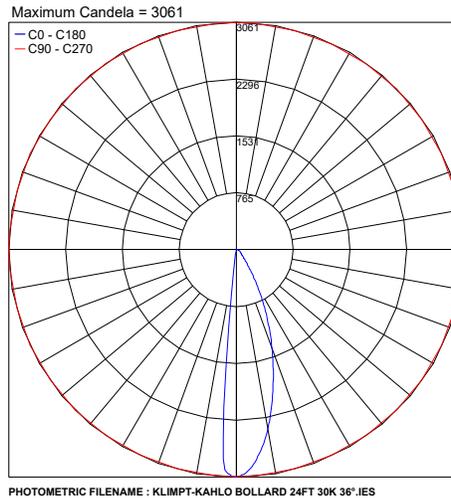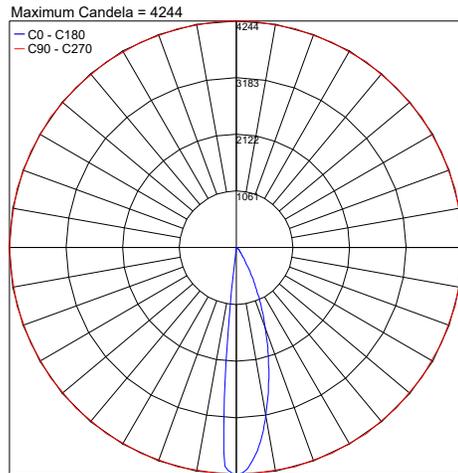

Job Name/Date:

Fixture Type Designation: