

Klimpt Wood is an LED bollard based on the Klimpt bollard suitable for outdoor installation. It has with a 4.5" square head and real teak wood inset in the aluminum body. Offered in 2 heights – 2-foot or 3-foot – with 3 static white color temperatures, 3 optics options, and 5 standard finishes. Dark Sky compliant.




MADE IN THE U.S.A. - Teak Wood Shown

TECHNICAL DATA

| | |
|---------------------------|---|
| Wattage | 20W |
| Power Supply | Integral 120VAC |
| Dimming | 0-10V Dimming |
| Construction | Body: Aluminum Lens: Clear |
| CCT | 2700K, 3000K, 4000K |
| BUG Rating | B1-U0-G0 (3000K - All Optics) |
| CRI | >90 |
| Delivered Lumens | 1428 lm (24°, 3000K) 1356 lm (36°, 3000K) 1565 lm (Asym, 3000K) Dark Sky compliant |
| Efficacy | 71.4 lm/W (24°, 3000K) 67.8 lm/W (36°, 3000K) 78.3 lm/W (Asym, 3000K) |
| Optics | 24°, 36°, Asymmetric |
| Finishes | Real Teak Wood 5 Standard - See page 2 Custom RAL on request |
| Fixture Dimensions | Pole: 2.56" l x 2.20" w x 24.0" or 36.0" h Head: 4.48" x 4.48" x 1.42" h |
| IP Rating | IP65 |

Fixture Dimensions

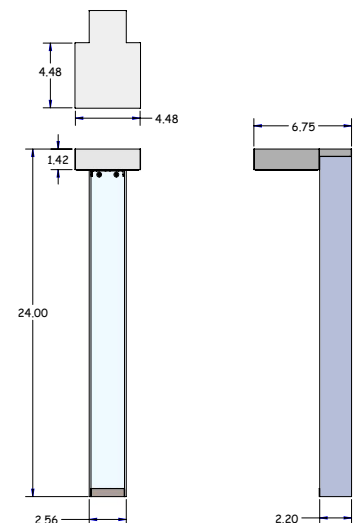

ORDERING INFORMATION


Example: KLI-W-1-30-01-TK-11-C-0. Accessories ordered separately.

| KLI-W | - | | - | | - | TK | - | | - | C | - | 0 |
|---------|----------------------|--|------------------------------------|---------------------|--|--------------------------------------|----------|--|---|---|---|---|
| Model # | Height | CCT | Optics | Wood Finish | Finish | Dimming | Options | | | | | |
| KLI-W | 1 - 2 ft 2 - 3 ft | 27 - 2700K 30 - 3000K 40 - 4000K | 01 - 24° 02 - 36° 03 - Asym. | TK - Real Teak Wood | 11 - White Suede 02 - Black Suede 03 - Gray 18 - Textured Bronze TS - Silver C - Custom | C - Integral 120VAC 0-10V Dimming | 0 - None | | | | | |

Job Name/Date:

Fixture Type Designation:


ACCESSORIES - Installation



AM-00010
Mounting Base
Assembly


WOOD FINISHES - Real Teak Wood Shown on page 1

FINISHES

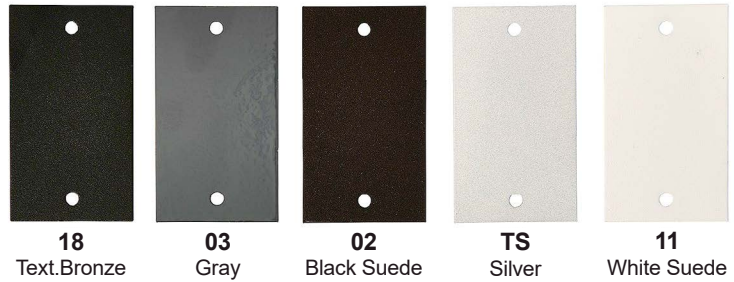


PHOTOMETRICS


Note: All photometry is 3000K

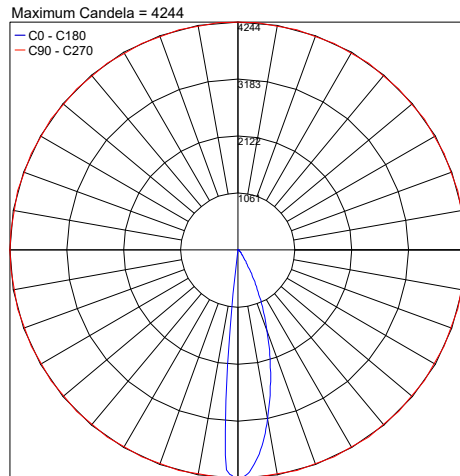

PHOTOMETRIC FILENAME : KLIMPT-KAHLO BOLLARD 24FT 30K 24° .IES

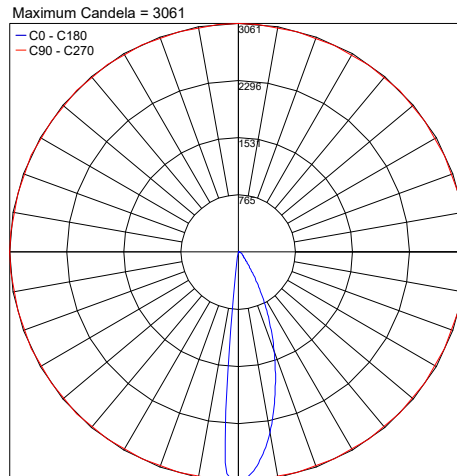

PHOTOMETRIC FILENAME : KLIMPT-KAHLO BOLLARD 24FT 30K 36° .IES

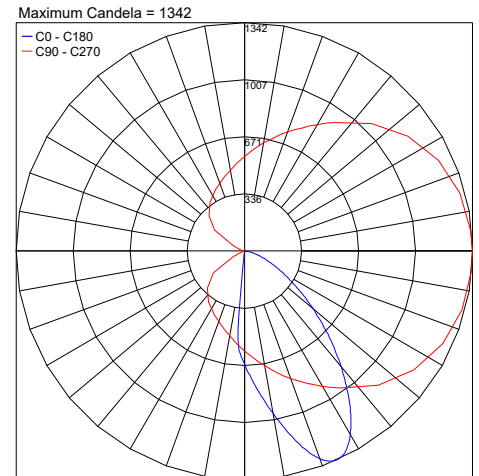

PHOTOMETRIC FILENAME : KLIMPT-KAHLO BOLLARD 24FT 30K ASYM .IES

Job Name/Date:

Fixture Type Designation: