

# MOK BOLLARD 2200

## 180° EMISSION

MOK is a family of easy to install, durable LED fixtures that integrate into a variety of environments with wall, pole, or ceiling mounted versions, spotlights and bollards. MOK Bollard 2200 is a 87.0" height version with 180° light emission, suitable for outdoor installation and resistant to water thanks to its IP65, IP68 rating. It is available in 3 color temperatures and 3 standard finishes.

designplan®


datasheet



### TECHNICAL DATA

<b>Wattage</b>	11W
<b>Power Supply</b>	Integral 120VAC
<b>Dimming</b>	On/Off
<b>Construction</b>	Body: Aluminum Lens: Extra Clear Tempered Glass
<b>CCT</b>	2700K, 3000K, 4000K
<b>BUG Rating</b>	B0-U1-G0
<b>CRI</b>	>80
<b>Delivered Lumens</b>	793 lm (3000K)
<b>Efficacy</b>	72.1 lm/W (3000K)
<b>Optics</b>	180°
<b>Finishes</b>	Anthracite ALU Gray (RAL 9006) Dark Brown
<b>Lumen Maintenance</b>	85,000 hrs (Ta 35°C)
<b>Fixture Dimensions</b>	Ø6.61" x 5.87" w x 87.20" h
<b>IP Rating</b>	IP65, IP68 (Fast connection)
<b>Impact Resistance</b>	IK09

Fixture Dimensions

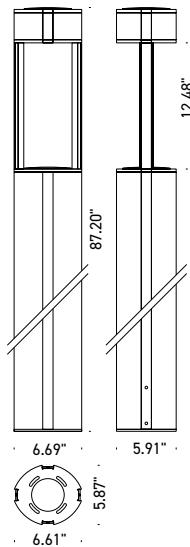

### ORDERING INFORMATION

Example: F62057.1.2.64.US. Accessories ordered separately.

F62057 . . 64 . US

Model No.	Finish	CCT	Optics	US
F62057	1 - Anthracite 4 - ALU Gray (RAL 9006) 8 - Dark Brown	2 - 2700K 3 - 3000K 4 - 4000K	64 - Single Emission (180°)	US

Job Name/Date:

Fixture Type Designation:

# MOK BOLLARD 2200


## 180° EMISSION

designplan®

datasheet

### ACCESSORIES


#### Installation

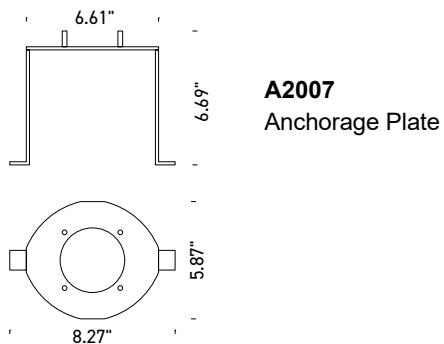

### PHOTOMETRIC DATA

*Note: All Photometry is 3000K*

Maximum Candela = 946.6

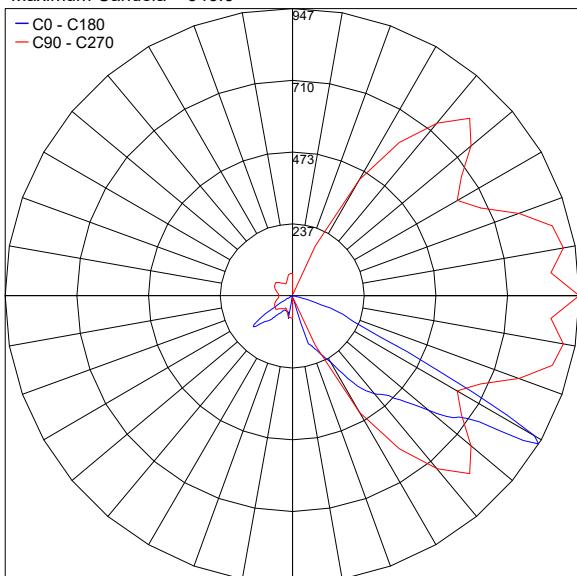

Job Name/Date:

Fixture Type Designation:

[sales@designplan.com](mailto:sales@designplan.com)  
[www.designplan.com](http://www.designplan.com)

79 Trenton Avenue, Frenchtown NJ 08825  
© Copyright 2025 Designplan Lighting, Inc.  
Published: January 29, 2026

P: 908-996-7710  
F: 908-996-7042  
2 of 2