

# MOK BOLLARD 580

## 180° EMISSION

MOK is a family of easy to install, durable LED fixtures that integrate into a variety of environments with wall, pole, or ceiling mounted versions, spotlights and bollards. MOK Bollard 580 is a 23.0" height version with 180° light emission, suitable for outdoor installation and resistant to water thanks to its IP65, IP68 rating. It is available in 3 color temperatures and 3 standard finishes.

**designplan** 


datasheet



### TECHNICAL DATA

<b>Wattage</b>	5.5W
<b>Power Supply</b>	Integral 120VAC
<b>Dimming</b>	On/Off
<b>Construction</b>	Body: Aluminum Lens: Extra Clear Tempered Glass
<b>CCT</b>	2700K, 3000K, 4000K
<b>BUG Rating</b>	B0-U1-G0
<b>CRI</b>	>80
<b>Delivered Lumens</b>	449 lm (3000K)
<b>Efficacy</b>	81.6 lm/W (3000K)
<b>Optics</b>	180°
<b>Finishes</b>	Anthracite ALU Gray (RAL 9006) Dark Brown
<b>Lumen Maintenance</b>	95,000 hrs (Ta 35°C)
<b>Fixture Dimensions</b>	Ø6.61" x 5.87" w x 23.03" h
<b>IP Rating</b>	IP65, IP68 (Fast connection)
<b>Impact Resistance</b>	IK09

Fixture Dimensions



### ORDERING INFORMATION

Example: F62014.1.2.64.US. Accessories ordered separately.


F62014	.	.	64	.	US
<b>Model No.</b>	<b>Finish</b>	<b>CCT</b>	<b>Optics</b>		
F62014	1 - Anthracite 4 - ALU Gray (RAL 9006) 8 - Dark Brown	2 - 2700K 3 - 3000K 4 - 4000K	64 - Single Emission (180°)	US	

Job Name/Date:

Fixture Type Designation:

### ACCESSORIES


#### Installation

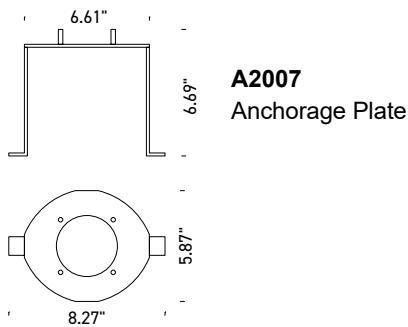

### PHOTOMETRIC DATA

*Note: All Photometry is 3000K*

Maximum Candela = 622.2

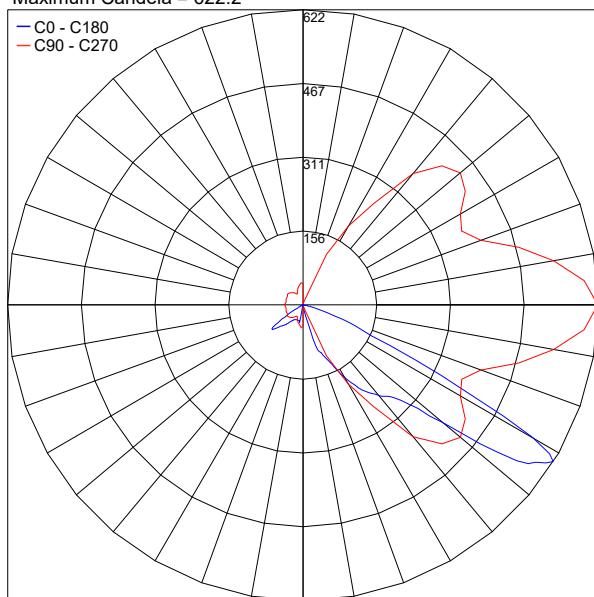

PHOTOMETRIC FILENAME : MOK 180° BOLLARD 580 23IN 30K - 62014.X.3.64.IES

Job Name/Date:

Fixture Type Designation: