

# MOK BOLLARD 2200

## 360° EMISSION


MOK is a family of easy to install, durable LED fixtures that integrate into a variety of environments with wall, pole, or ceiling mounted versions, spotlights and bollards. MOK Bollard 2200 is a 87.0" height version with 360° light emission, suitable for outdoor installation and resistant to water thanks to its IP65, IP68 rating. It is available in 3 color temperatures and 3 standard finishes.



### TECHNICAL DATA

<b>Wattage</b>	22W
<b>Power Supply</b>	Integral 120VAC - On/Off
<b>Construction</b>	Body: Aluminum Lens: Extra Clear Tempered Glass
<b>CCT</b>	2700K, 3000K, 4000K
<b>BUG Rating</b>	B1-U1-G1
<b>CRI</b>	>80
<b>Delivered Lumens</b>	1585 lm (3000K)
<b>Efficacy</b>	72.1 lm/W (3000K)
<b>Optics</b>	360°
<b>Finishes</b>	Anthracite ALU Gray (RAL 9006) Dark Brown
<b>Lumen Maintenance</b>	85,000 hrs (Ta 35°C)
<b>Fixture Dimensions</b>	Ø6.61" x 5.87" w x 87.20" h
<b>IP Rating</b>	IP65, IP68 (Fast connection)
<b>Impact Resistance</b>	IK09

Fixture Dimensions

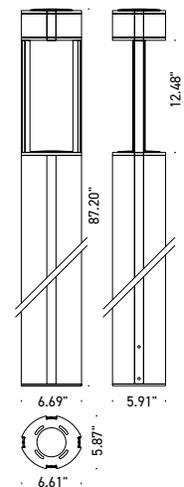

### ORDERING INFORMATION

Example: F62058.1.2.67.US. Accessories sold separately.

<b>F62058</b>			<b>67</b>	<b>US</b>
<b>Model No.</b>	<b>Finish</b>	<b>CCT</b>	<b>Optics</b>	
<b>F62058</b>	1 - Anthracite 4 - ALU Gray (RAL 9006) 8 - Dark Brown	2 - 2700K 3 - 3000K 4 - 4000K	<b>67 - Double Emission (360°)</b>	<b>US</b>


Job Name/Date:

Fixture Type Designation:

# MOK BOLLARD 2200

## 360° EMISSION


### ACCESSORIES

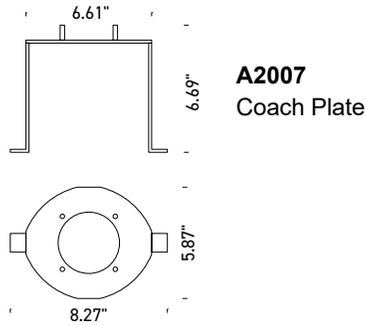

### PHOTOMETRIC DATA

Note: All Photometry is 3000K

Maximum Candela = 992.7

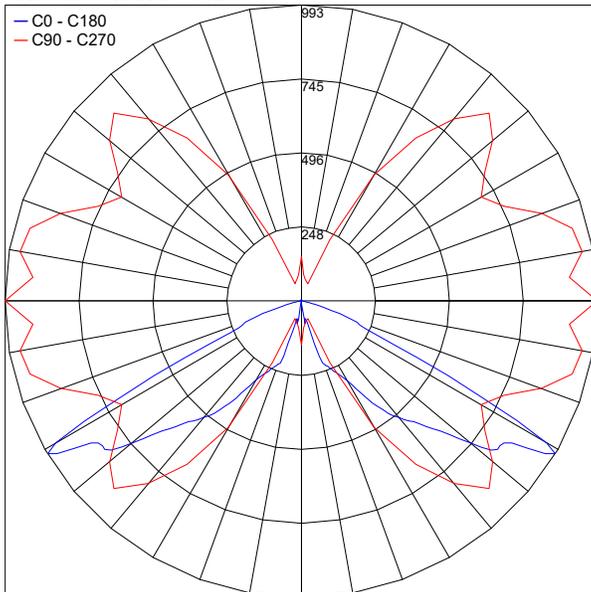

PHOTOMETRIC FILENAME : MOK 360° BOLLARD 2200 87IN 30K - 62058.X.3.67.IES

Job Name/Date:

Fixture Type Designation: