

MOK BOLLARD 580

360° EMISSION

MOK is a family of easy to install, durable LED fixtures that integrate into a variety of environments with wall, pole, or ceiling mounted versions, spotlights and bollards. MOK Bollard 580 is a 23.0" height version with 360° light emission, suitable for outdoor installation and resistant to water thanks to its IP65, IP68 rating. It is available in 3 color temperatures and 3 standard finishes.

designplan®


datasheet



TECHNICAL DATA

Wattage	11W
Power Supply	Integral 120VAC
Dimming	On/Off
Construction	Body: Aluminum Lens: Extra Clear Tempered Glass
CCT	2700K, 3000K, 4000K
BUG Rating	B1-U1-G0
CRI	>80
Delivered Lumens	898 lm (3000K)
Efficacy	81.6 lm/W (3000K)
Optics	360°
Finishes	Anthracite ALU Gray (RAL 9006) Dark Brown
Lumen Maintenance	95,000 hrs (Ta 35°C)
Fixture Dimensions	Ø6.61" x 5.87" w x 23.03" h
IP Rating	IP65, IP68 (Fast connection)
Impact Resistance	IK09

Fixture Dimensions

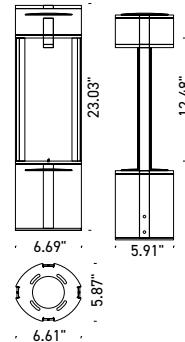

ORDERING INFORMATION

Example: F62015.1.2.67.US. Accessories ordered separately.

F62015			67	US
Model No.	Finish	CCT	Optics	US
F62015	1 - Anthracite 4 - ALU Gray (RAL 9006) 8 - Dark Brown	2 - 2700K 3 - 3000K 4 - 4000K	67 - Double Emission (360°)	US

Job Name/Date:

Fixture Type Designation:

MOK BOLLARD 580


360° EMISSION

designplan®

datasheet

ACCESSORIES


Installation

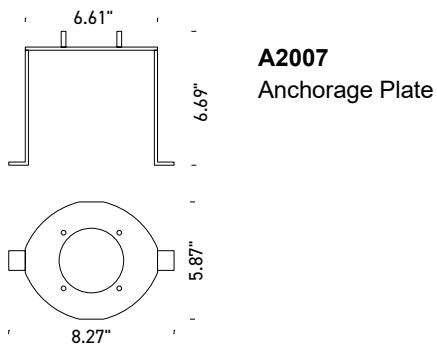

PHOTOMETRIC DATA

Note: All Photometry is 3000K

Maximum Candela = 661.2

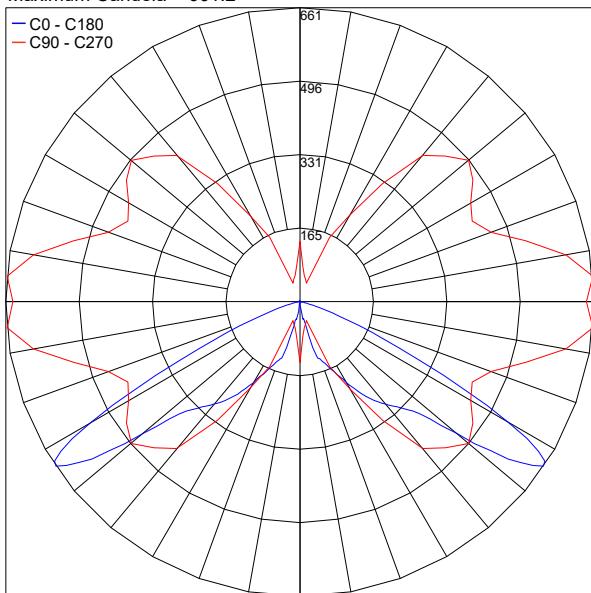

PHOTOMETRIC FILENAME : MOK 360° BOLLARD 580 23IN 30K - 62015.X.3.67.IES

Job Name/Date:

Fixture Type Designation: