

MOK FLOODLIGHT PRO RGBW


MOK is a family of easy to install, durable LED fixtures that integrate into a variety of environments with wall, pole, or ceiling mounted versions, spotlights and bollards. MOK Floodlight Pro RGBW is the larger floodlight (Ø6.7") offering RGBW light, rotatable 180° horizontally and 90° vertically, suitable for outdoor installation and resistant to water thanks to its IP65, IP68 rating. It is available in 5 optics options, and 3 standard finishes.



TECHNICAL DATA

Wattage	36W
Power Supply	Integral 120VAC - On-board DMX
Construction	Body: Aluminum Bracket: Stainless Steel Lens: Extra Clear Tempered Glass
CCT	RGBW
BUG Rating	-
CRI	>80
Delivered Lumens	759 lm: (R) 100 lm, (G) 251 lm, (B) 61 lm, (W) 347 lm (6500K)
Efficacy	21.1 lm/W: (R) 2.8 lm/W, (G) 7 lm/W, (B) 1.7 lm/W, (W) 9.6 lm/W (6500K)
Optics	10°, 25°, 45°, 10°x40°, 40°x10°
Finishes	Anthracite, ALU Gray (RAL 9006), Dark Brown
Lumen Maintenance	90,000 hrs (Ta 35°C)
Fixture Dimensions	Ø6.69" x 7.44"
IP Rating	IP65, IP68 (Fast connection)
Impact Resistance	IK08

Fixture Dimensions

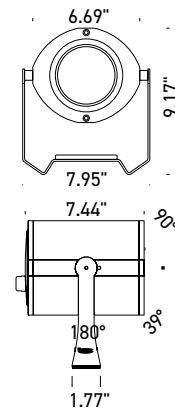

ORDERING INFORMATION

Example: F42027.1.5.11.US. Accessories ordered separately.



F42027		5		US
Model No.	Finish	CCT	Optics	
F42027	1 - Anthracite 4 - ALU Gray (RAL 9006) 8 - Dark Brown	5 - RGB+W	01 - 10° Spot 36 - 25° Medium 32 - 45° Wide 70 - 10°x40° 38 - 40°x10°	US

Job Name/Date:


Fixture Type Designation:

ACCESSORIES


Installation / Anti-Glare



A9903
Steel Peg




A0003
Anchoring Belt
L = 6.56 ft

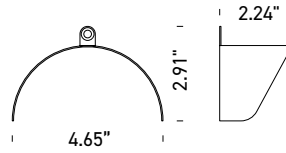

A2001_
Aluminum visor for MOK Mini
1 - Anthracite
4 - ALU Gray (RAL 9006)
8 - Dark Brown
(To be ordered together with the product)

ACCESSORIES

Controllers (RGBW)



PPWD00570 - RGBW DMX512+Wifi Controller

Touch Sensitive

Can be controlled by WiFi

Controls 3 zones synchronously and separately

Job Name/Date:

Fixture Type Designation: