

# MOK FLOODLIGHT PRO RGBW

designplan®

datasheet


MOK is a family of easy to install, durable LED fixtures that integrate into a variety of environments with wall, pole, or ceiling mounted versions, spotlights and bollards. MOK Floodlight Pro RGBW is the larger floodlight ( $\varnothing 6.7"$ ) offering RGBW light, rotatable 180° horizontally and 90° vertically, suitable for outdoor installation and resistant to water thanks to its IP65, IP68 rating. It is available in 5 optics options, and 3 standard finishes.



## TECHNICAL DATA

<b>Wattage</b>	36W
<b>Power Supply</b>	Integral 120VAC - On-board DMX
<b>Construction</b>	Body: Aluminum Bracket: Stainless Steel Lens: Extra Clear Tempered Glass
<b>CCT</b>	RGBW
<b>BUG Rating</b>	–
<b>CRI</b>	>80
<b>Delivered Lumens</b>	759 lm: (R) 100 lm, (G) 251 lm, (B) 61 lm, (W) 347 lm (6500K)
<b>Efficacy</b>	21.1 lm/W: (R) 2.8 lm/W, (G) 7 lm/W, (B) 1.7 lm/W, (W) 9.6 lm/W (6500K)
<b>Optics</b>	10°, 25°, 45°, 10°x40°, 40°x10°
<b>Finishes</b>	Anthracite, ALU Gray (RAL 9006), Dark Brown
<b>Lumen Maintenance</b>	90,000 hrs (Ta 35°C)
<b>Fixture Dimensions</b>	$\varnothing 6.69" \times 7.44"$
<b>IP Rating</b>	IP65, IP68 (Fast connection)
<b>Impact Resistance</b>	IK08

Fixture Dimensions

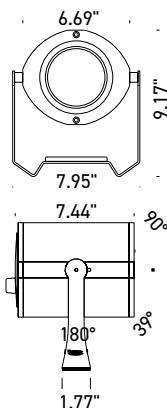

## ORDERING INFORMATION


Example: F42027.1.5.11.US. Accessories ordered separately.

F42027		5		US
<b>Model No.</b>	<b>Finish</b>	<b>CCT</b>	<b>Optics</b>	
F42027	1 - Anthracite 4 - ALU Gray (RAL 9006) 8 - Dark Brown	5 - RGB+W	01 - 10° Spot 36 - 25° Medium 32 - 45° Wide 70 - 10°x40° 38 - 40°x10°	US


Job Name/Date:

Fixture Type Designation:


## ACCESSORIES



**A9903**  
Steel Peg



**A0003**  
Anchoring Belt  
L = 6.56 ft



**A2001\_-**  
Aluminum visor for MOK Mini  
**1** - Anthracite  
**4** - ALU Gray (RAL 9006)  
**8** - Dark Brown  
(To be ordered together with the product)

Job Name/Date:

Fixture Type Designation: