

MOK FLOODLIGHT


MOK is a family of easy to install, durable LED fixtures that integrate into a variety of environments with wall, pole, or ceiling mounted versions, spotlights and bollards. MOK Floodlight is the larger floodlight (Ø6.7"), rotatable 180° horizontally and 90° vertically, suitable for outdoor installation and resistant to water thanks to its IP65, IP68 rating. It is available in 3 color temperatures, 3 optics options, and 3 standard finishes.



TECHNICAL DATA

Wattage	20W
Power Supply	Integral 120VAC
Construction	Body: Aluminum Bracket: Stainless Steel Lens: Extra Clear Tempered Glass
CCT	2700K, 3000K, 4000K
BUG Rating	B2-U0-G0 (3000K)
CRI	>80
Delivered Lumens	2034 lm (3000K, 12°)
Efficacy	101.7 lm/W (3000K, 12°)
Optics	12°, 24°, 38°
Finishes	Anthracite, ALU Gray (RAL 9006), Dark Brown
Lumen Maintenance	55,000 hrs (Ta 35°C)
Fixture Dimensions	Ø6.69" x 7.44"
IP Rating	IP65, IP68 (Fast connection)
Impact Resistance	IK08

Fixture Dimensions

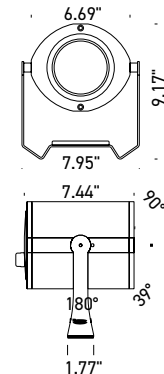

ORDERING INFORMATION


Example: F42023.1.2.11.US. Accessories ordered separately.

F42023				US
Model No.	Finish	CCT	Optics	
F42023	1 - Anthracite 4 - ALU Gray (RAL 9006) 8 - Dark Brown	2 - 2700K 3 - 3000K 4 - 4000K	11 - 12° Spot 12 - 24° Medium 13 - 38° Medium	US


Job Name/Date:

Fixture Type Designation:

ACCESSORIES



A9903
Steel Peg




L.MAX 6.56 ft



0.98"

A0003
Anchoring Belt
L = 6.56 ft




A2001._
Aluminum visor for MOK Mini
1 - Anthracite
4 - ALU Gray (RAL 9006)
8 - Dark Brown
(To be ordered together with the product)

PHOTOMETRIC DATA

Note: All Photometry is 3000K

Maximum Candela = 14339.6


— C0 - C180
— C90 - C270

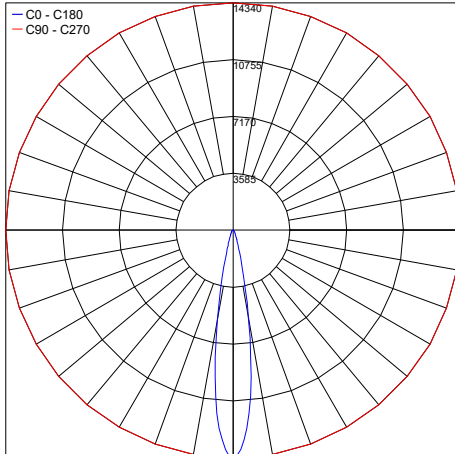

PHOTOMETRIC FILENAME : MOK FLOODLIGHT 30K 12° - 42023.X.3.11.IES

Maximum Candela = 7999.6


— C0 - C180
— C90 - C270

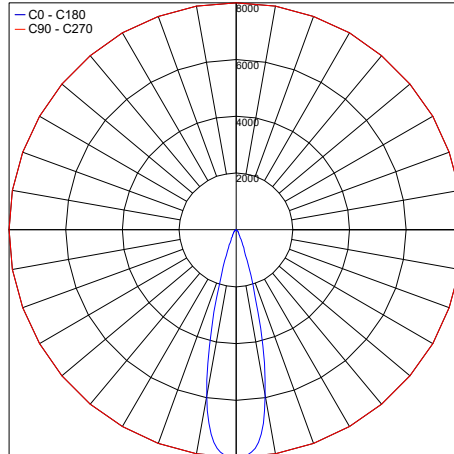

PHOTOMETRIC FILENAME : MOK FLOODLIGHT 30K 24° - 42023.X.3.12.IES

Maximum Candela = 4147.5

— C0 - C180
— C90 - C270

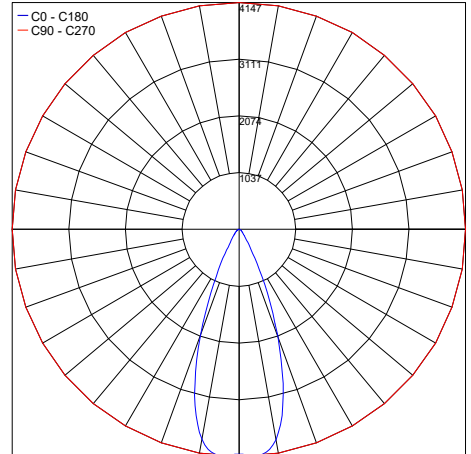

PHOTOMETRIC FILENAME : MOK FLOODLIGHT 30K 38° - 42023.X.3.13.IES

Job Name/Date:

Fixture Type Designation: