

MOK MINI BOLLARD 280

180° EMISSION


MOK is a family of easy to install, durable LED fixtures that integrate into a variety of environments with wall, pole, or ceiling mounted versions, spotlights and bollards. MOK Mini Bollard 280 is a 11.0" height version with 180° light emission, suitable for outdoor installation and resistant to water thanks to its IP65, IP68 rating. It is available in 3 color temperatures and 3 standard finishes.



TECHNICAL DATA

Wattage	3W
Power Supply	Integral 120VAC
Dimming	On/Off
Construction	Housing: 6060 T5 Aluminum Lens: Extra Clear Tempered Glass
CCT	2700K, 3000K, 4000K
BUG Rating	B0-U1-G0 (3000K)
CRI	>80
Delivered Lumens	175 lm (3000K)
Efficacy	58.3 lm/W (3000K)
Optics	180°
Finishes	Anthracite, ALU Gray (RAL 9006), Dark Brown
Lumen Maintenance	150,000 hrs (Ta 35°C)
Fixture Dimensions	Ø4.33" x 3.80" w x 11.02" h
IP Rating	IP65, IP68 (Fast connection)
Impact Resistance	IK09

Fixture Dimensions



ORDERING INFORMATION

Example: F62003.1.2.64.US. Accessories ordered separately.

F62003			64	US
Model No.	Finish	CCT	Optics	
F62003	1 - Anthracite 4 - ALU Gray (RAL 9006) 8 - Dark Brown	2 - 2700K 3 - 3000K 4 - 4000K	64 - Single Emission	US

Job Name/Date:


Fixture Type Designation:

MOK MINI BOLLARD 280

180° EMISSION

ACCESSORIES

Installation




A1802
Anchorage Plate

PHOTOMETRIC DATA

Note: All Photometry is 3000K

Maximum Candela = 273.6

— C0 - C180
— C90 - C270

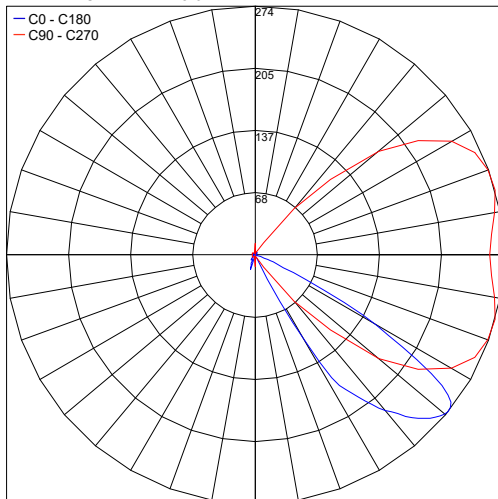

PHOTOMETRIC FILENAME : MOK MINI 180° BOLLARD 280 11IN 30K - 62003.X.3.64.IES

Job Name/Date:

Fixture Type Designation: