

MOK MINI BOLLARD 1200

360° EMISSION

MOK is a family of easy to install, durable LED fixtures that integrate into a variety of environments with wall, pole, or ceiling mounted versions, spotlights and bollards. MOK Mini Bollard 1200 is a 47.2" height version with 360° light emission, suitable for outdoor installation and resistant to water thanks to its IP65, IP68 rating. It is available in 3 color temperatures and 3 standard finishes.

designplan®

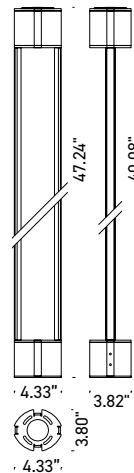
datasheet



TECHNICAL DATA

| | |
|--------------------|--|
| Wattage | 6W |
| Power Supply | Integral 120VAC |
| Dimming | On/Off |
| Construction | Body: Aluminum Lens: Extra Clear Tempered Glass |
| CCT | 2700K, 3000K, 4000K |
| BUG Rating | B0-U1-G0 (3000K) |
| CRI | >80 |
| Delivered Lumens | 387 lm (3000K) |
| Efficacy | 64.5 lm/W (3000K) |
| Optics | 360° |
| Finishes | Anthracite ALU Gray (RAL 9006) Dark Brown |
| Lumen Maintenance | 150,000 hrs (Ta 35°C) |
| Fixture Dimensions | Ø4.33" x 3.80" w x 47.24" h |
| IP Rating | IP65, IP68 (Fast connection) |
| Impact Resistance | IK09 |

Fixture Dimensions



ORDERING INFORMATION

Example: F62008.1.2.67.US. Accessories ordered separately.

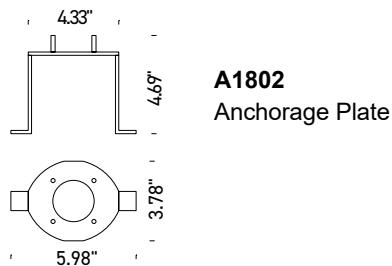
| | | | | |
|-----------|---|-------------------------------------|-----------------------------|----|
| F62008 | | | 67 | US |
| Model No. | Finish | CCT | Optics | US |
| F62008 | 1 - Anthracite 4 - ALU Gray (RAL 9006) 8 - Dark Brown | 2 - 2700K 3 - 3000K 4 - 4000K | 67 - Double Emission (360°) | US |

Job Name/Date:

Fixture Type Designation:

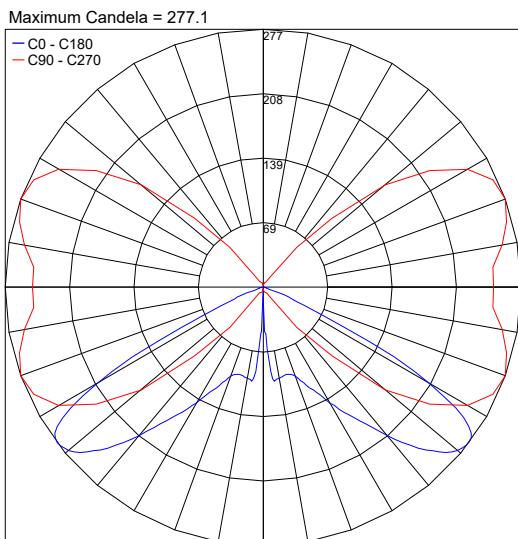
ACCESSORIES

Installation

**A1802**

Anchorage Plate

PHOTOMETRIC DATA

Note: All Photometry is 3000K

PHOTOMETRIC FILENAME : MOK MINI 360° BOLLARD 1200 47IN 30K - 62008.X.3.67.IES

Job Name/Date:

Fixture Type Designation: