

# MOK MINI BOLLARD 1200

## 360° EMISSION

MOK is a family of easy to install, durable LED fixtures that integrate into a variety of environments with wall, pole, or ceiling mounted versions, spotlights and bollards. MOK Mini Bollard 1200 is a 47.2" height version with 360° light emission, suitable for outdoor installation and resistant to water thanks to its IP65, IP68 rating. It is available in 3 color temperatures and 3 standard finishes.

designplan®


datasheet



### TECHNICAL DATA

<b>Wattage</b>	6W
<b>Power Supply</b>	Integral 120VAC - On/Off
<b>Construction</b>	Body: Aluminum Lens: Extra Clear Tempered Glass
<b>CCT</b>	2700K, 3000K, 4000K
<b>BUG Rating</b>	B0-U1-G0 (3000K)
<b>CRI</b>	>80
<b>Delivered Lumens</b>	387 lm (3000K)
<b>Efficacy</b>	64.5 lm/W (3000K)
<b>Optics</b>	360°
<b>Finishes</b>	Anthracite, ALU Gray (RAL 9006), Dark Brown
<b>Lumen Maintenance</b>	150,000 hrs (Ta 35°C)
<b>Fixture Dimensions</b>	Ø4.33" x 3.80" w x 47.24" h
<b>IP Rating</b>	IP65, IP68 (Fast connection)
<b>Impact Resistance</b>	IK09

Fixture Dimensions

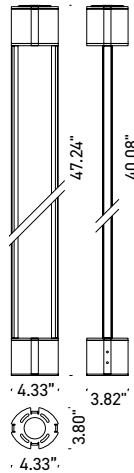

### ORDERING INFORMATION


Example: F62008.1.2.67.US. Accessories sold separately.

F62008			67	US
<b>Model No.</b>	<b>Finish</b>	<b>CCT</b>	<b>Optics</b>	
F62008	1 - Anthracite 4 - ALU Gray (RAL 9006) 8 - Dark Brown	2 - 2700K 3 - 3000K 4 - 4000K	67 - Double Emission (360°)	US

Job Name/Date:


Fixture Type Designation:

### ACCESSORIES



### PHOTOMETRIC DATA

Note: All Photometry is 3000K

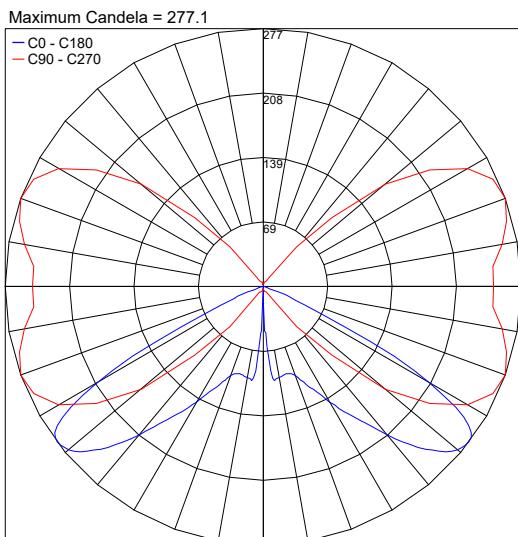

Job Name/Date:

Fixture Type Designation: